



Dimensions: [mm]

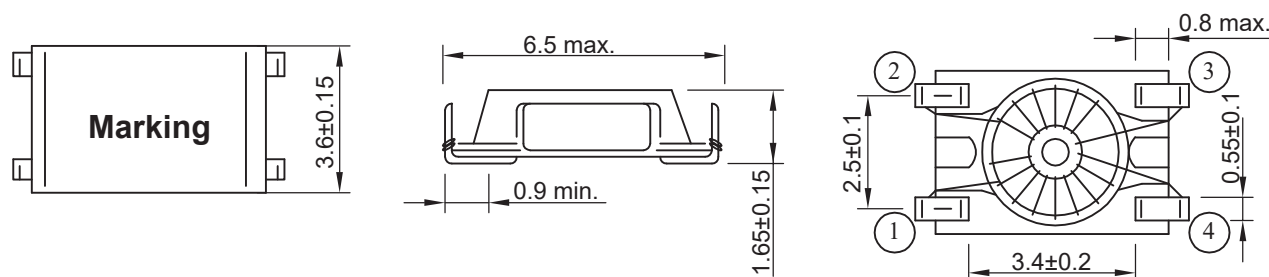


Recommended Land Pattern: [mm]

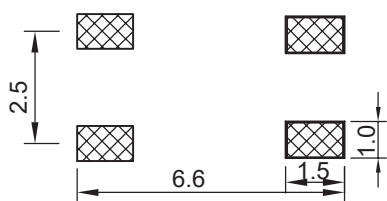

(PCB Pattern)

Schematic:

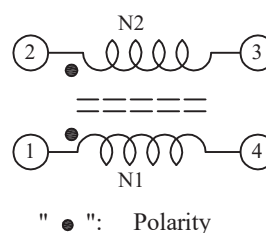


Electrical Properties:

Properties	L (μH)	Impedance (Ω)	Rated Current (mA)	R _{DC} (Ω)	Hi-Pot Test
Value	330	900	300	0.30	250Vac/60Hz 3mA/1 minute.
Tolerance	±50%	min.	-	max.	
Test Condition	10KHz/20mV	3~120MHz	ΔT=20°C	-	


General Information:


Test conditions of Electrical Properties: 25°C
 Operating Temperature: -40°C to +105°C
 Storage Temperature: -40°C to +105°C

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd DESCRIPTION: SMD Common Mode Line Filter
				SCALE:	
				SHEET: 1/2	
				APPROVAL: ABD	
				SIZE:	
A	03-JUN-20	PDF	CY	PACKING UNIT: 1000 pcs	PART NO: CM1-331Y
REV	DATE	FILE	BY		

Typical Electrical Characteristics:

Impedance VS. Frequency Characteristics:

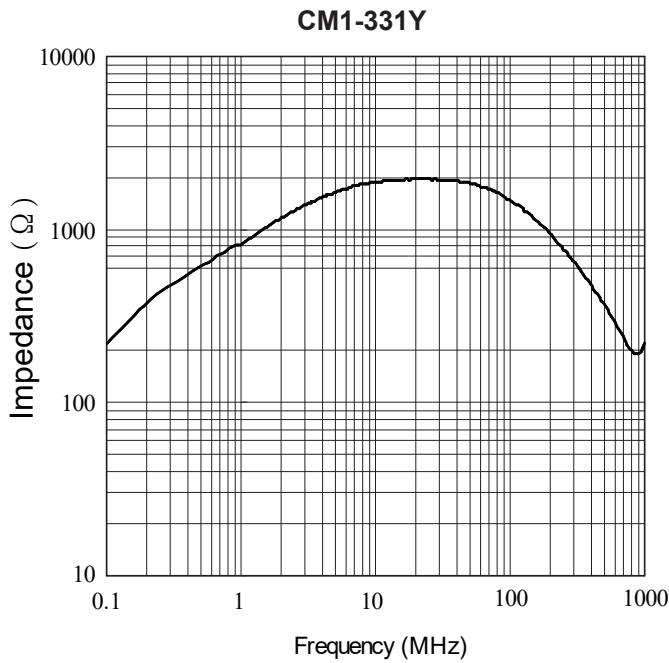

				UNIT: MM	 KOHER (Shanghai) Electronic Co.,Ltd DESCRIPTION: SMD Common Mode Line Filter
				SCALE:	
				SHEET: 2/2	
				APPROVAL: ABD	
				SIZE:	
A	03-JUN-20	PDF	CY	PACKING UNIT: 1000 pcs	PART NO: CM1-331Y
REV	DATE	FILE	BY		