



**SERIES: VAQE6W-D | DESCRIPTION: DC-DC CONVERTER**
**FEATURES**

- industry standard footprint
- high efficiency up to 88%
- single and dual output models available
- board mount
- 3000 Vdc isolation
- industrial operating temp -40~+85 °C
- 4:1 wide input range
- input under voltage protection & over voltage protection
- over current protection

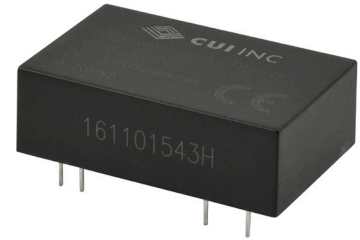

MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple & noise <sup>1</sup> max (mVp-p)	efficiency <sup>2</sup> typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
VAQE6W-Q24-S3-D	24	9~36	3.3	0	1500	4.95	120	79
VAQE6W-Q24-S5-D	24	9~36	5	0	1200	6	120	82
VAQE6W-Q24-S9-D	24	9~36	9	0	667	6	120	85
VAQE6W-Q24-S12-D	24	9~36	12	0	500	6	120	86
VAQE6W-Q24-S15-D	24	9~36	15	0	400	6	120	88
VAQE6W-Q24-S24-D	24	9~36	24	0	250	6	120	87
VAQE6W-Q24-D5-D	24	9~36	±5	0	±600	6	120	80
VAQE6W-Q24-D12-D	24	9~36	±12	0	±250	6	120	84
VAQE6W-Q24-D15-D	24	9~36	±15	0	±200	6	120	85
VAQE6W-Q48-S3-D	48	18~75	3.3	0	1500	4.95	120	79
VAQE6W-Q48-S5-D	48	18~75	5	0	1200	6	120	83
VAQE6W-Q48-S12-D	48	18~75	12	0	500	6	120	87
VAQE6W-Q48-S15-D	48	18~75	15	0	400	6	120	88
VAQE6W-Q48-S24-D	48	18~75	24	0	250	6	120	87

Notes: 1. From 5~100% load, nominal input, 20 MHz bandwidth oscilloscope, with 10 µF tantalum and 1 µF ceramic capacitors on the output. From 0~5% load, ripple and noise is <5% Vo.  
 2. Measured at nominal input voltage, full load.  
 3. All specifications are measured at Ta=25°C, humidity < 75%, nominal input voltage, and rated output load unless otherwise specified.

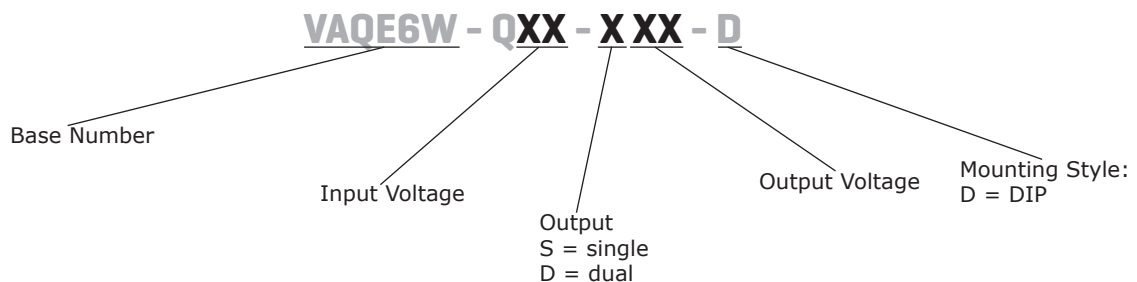**PART NUMBER KEY**


**INPUT**

parameter	conditions/description	min	typ	max	units
operating input voltage	24 Vdc input models	9	24	36	Vdc
	48 Vdc input models	18	48	75	Vdc
start-up voltage	24 Vdc input models			9	Vdc
	48 Vdc input models			18	Vdc
surge voltage	for maximum of 1 second				
	24 Vdc input models	-0.7		50	Vdc
	48 Vdc input models	-0.7		100	Vdc
under voltage shutdown	24 Vdc input models	5.5	6.5		Vdc
	48 Vdc input models	14	15.5		Vdc
current	24 Vdc input models			268	mA
		3.3 Vdc output models		320	mA
		all other models			
	48 Vdc input models			134	mA
		3.3 Vdc output models		154	mA
		all other models			
filter	Pi filter				
no load power consumption			0.12		W

**OUTPUT**

parameter	conditions/description	min	typ	max	units
maximum capacitive load <sup>1</sup>	3.3, 5 Vdc output models			2,200	μF
	9 Vdc output models			1,000	μF
	±12 Vdc output models			330	μF
	±15 Vdc output models			220	μF
	all other models			680	μF
voltage accuracy	5% to full load		±1	±3	%
	0%~5% load		±1	±3	%
	single output models		±2	±5	%
	dual output models				
line regulation	from low line to high line, full load				
	positive outputs		±0.2	±0.5	%
	negative outputs		±0.5	±1	%
load regulation <sup>2</sup>	from 5% to full load				
	positive outputs		±0.5	±1	%
	negative outputs		±0.5	±1.5	%
voltage balance <sup>3</sup>	dual output models		±0.5	±1.5	%
cross regulation	dual output models: main output 50% load secondary output from 10~100% load			±5	%
switching frequency <sup>4</sup>	PWM mode		300		kHz
transient recovery time	25% load step change, nominal input voltage		300	500	μs
transient response deviation	25% load step change, nominal input voltage		±3	±5	%
temperature coefficient	at full load			±0.03	%/°C

Note:

1. Tested at input voltage range and full load.
2. At 0~100% load, the max load regulation is ±5%.
3. Unbalanced loads should not exceed ±5%. If ±5% is exceeded, the product performance cannot be guaranteed.
4. Value is based on full load. At loads <50%, the switching frequency decreases with decreasing load.

**PROTECTIONS**

parameter	conditions/description	min	typ	max	units
over voltage protection		110		160	%
over current protection	24 Vdc output models	110	220	290	%
	all other models	110	140	190	%
short circuit protection	continuous, self recovery				

## SAFETY AND COMPLIANCE


parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA	3,000			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ
isolation capacitance	input to output, 100 kHz / 0.1 V		1,000		pF
safety approvals	UL 60950-1				
conducted emissions	CISPR22/EN55022, class A (no external circuit); class B (external circuit required, see Figure 3-b or 4-b)				
radiated emissions	CISPR22/EN55022, class A (no external circuit); class B (external circuit required, see Figure 3-b or 4-b)				
ESD	IEC/EN61000-4-2, contact ±4 kV, class B				
radiated immunity	IEC/EN61000-4-3, 10 V/m, class A				
EFT/burst	IEC/EN61000-4-4, ±2 kV, class B (external circuit required, see Figure 3-a or 4-a)				
surge	IEC/EN61000-4-5, ±2 kV, class B (external circuit required, see Figure 3-a or 4-a)				
conducted immunity	IEC/EN61000-4-6, 3 Vr.m.s, class A				
voltage dips & interruptions	IEC/EN61000-4-29, 0%-70%, class B				
MTBF	as per MIL-HDBK-217F, 25°C	1,000,000			hours
RoHS	2011/65/EU				

## ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		85	°C
storage temperature		-55		125	°C
storage humidity	non-condensing	5		95	%
vibration	10~55 Hz for 30 minutes on each axis		10		G

## SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	1.5 mm from case for 10 seconds			300	°C
wave soldering	see wave soldering profile			260	°C

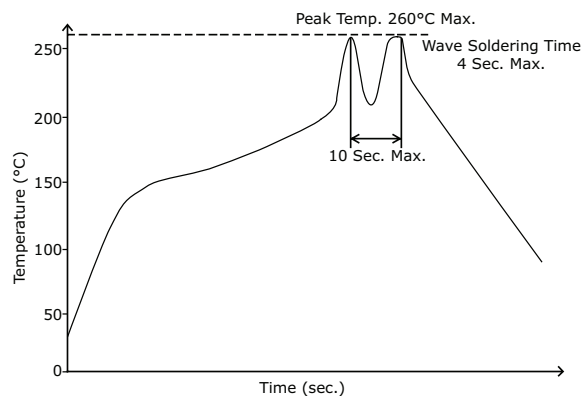

## MECHANICAL


parameter	conditions/description	min	typ	max	units
dimensions	31.60 x 20.30 x 10.20 [1.244 x 0.799 x 0.402 inch]				mm
case material	black flame-retardant heat-proof plastic (UL 94-V0)				
weight			13		g

## MECHANICAL DRAWING

units: mm [inch]  
 tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]  
 pin diameter tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]

PIN CONNECTIONS		
PIN	Function	
	Single	Dual
2, 3	GND	GND
9	No Pin	0V
11	NC	-Vout
14	+Vout	+Vout
16	0V	0V
22, 23	Vin	Vin

NC=no connection

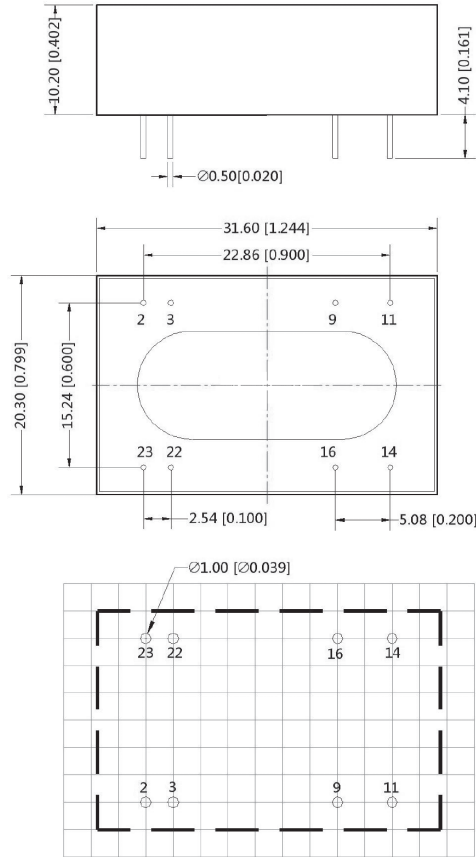


Note: 2.54 x 2.54 mm grid

Recommended PCB Layout  
Top View

## DERATING CURVE


Temperature Derating Curve  
(Natural Convection)

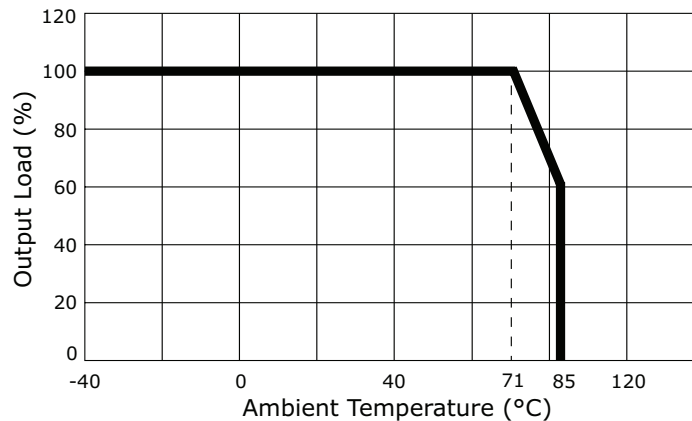


## APPLICATION CIRCUIT

This series has been tested according to the following recommended circuits (Figures 1 & 2) before leaving the factory. If you want to further reduce the input and output ripple, you can increase the input and output capacitors or select capacitors of low equivalent impedance provided that the capacitance is less than the maximum capacitive load of the model.

**Figure 1**  
Single Output Models

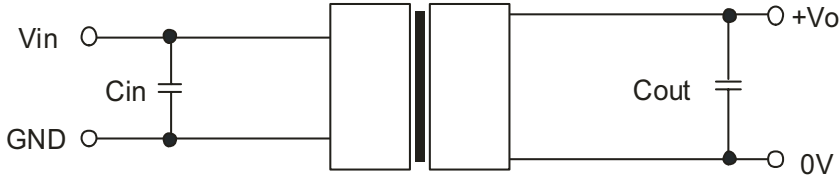

**Figure 2**  
Dual Output Models

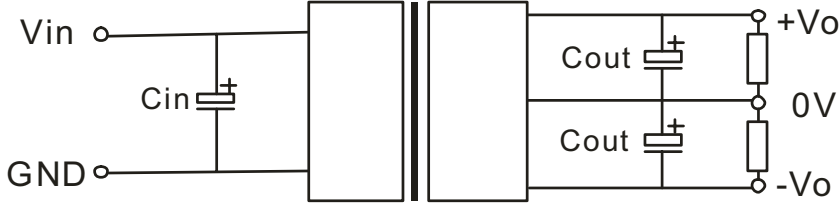


**Table 1**

Vin (Vdc)	Cin (μF)	Cout (μF)
24	100	10
48	10~47	10

## EMC RECOMMENDED CIRCUIT


**Figure 3**  
Single Output Models

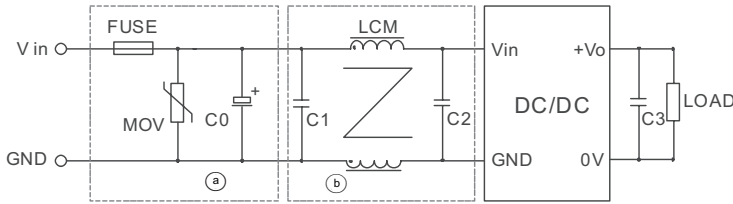

**Table 2**

Recommended External Circuit Components		
Vin (Vdc)	24	48
FUSE	choose according to actual input current	
MOV	S20K30	S14K60
C0	330 μF / 50 V	330 μF / 100 V
C1, C2	2.2 μF / 50 V	2.2 μF / 100 V
LCM	2.2 mH	
C3	10 μF	

**Figure 4**  
Dual Output Models

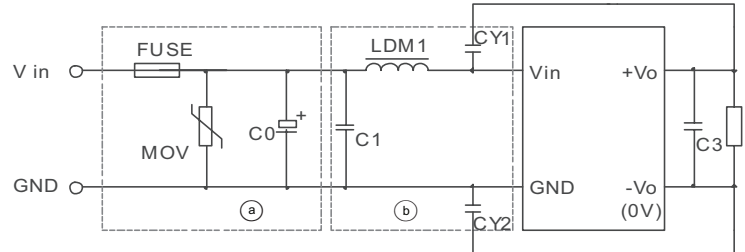

**Table 3**

Recommended External Circuit Components	
Vin (Vdc)	24
FUSE	choose according to actual input current
MOV	S20K30
C0	1,000 μF / 50 V
C1	1 μF / 50 V
C3	10 μF
LDM1	4.7 μF
CY1, CY2	1 nF / 3 kV

## PACKAGING


units: mm

Tube Size: 21.5 x 17 mm

Inner Carton Size: 135 x 100 x 575 mm

Outer Carton Size: 285 x 225 x 600 mm

Outer Carton QTY: 1080 pcs

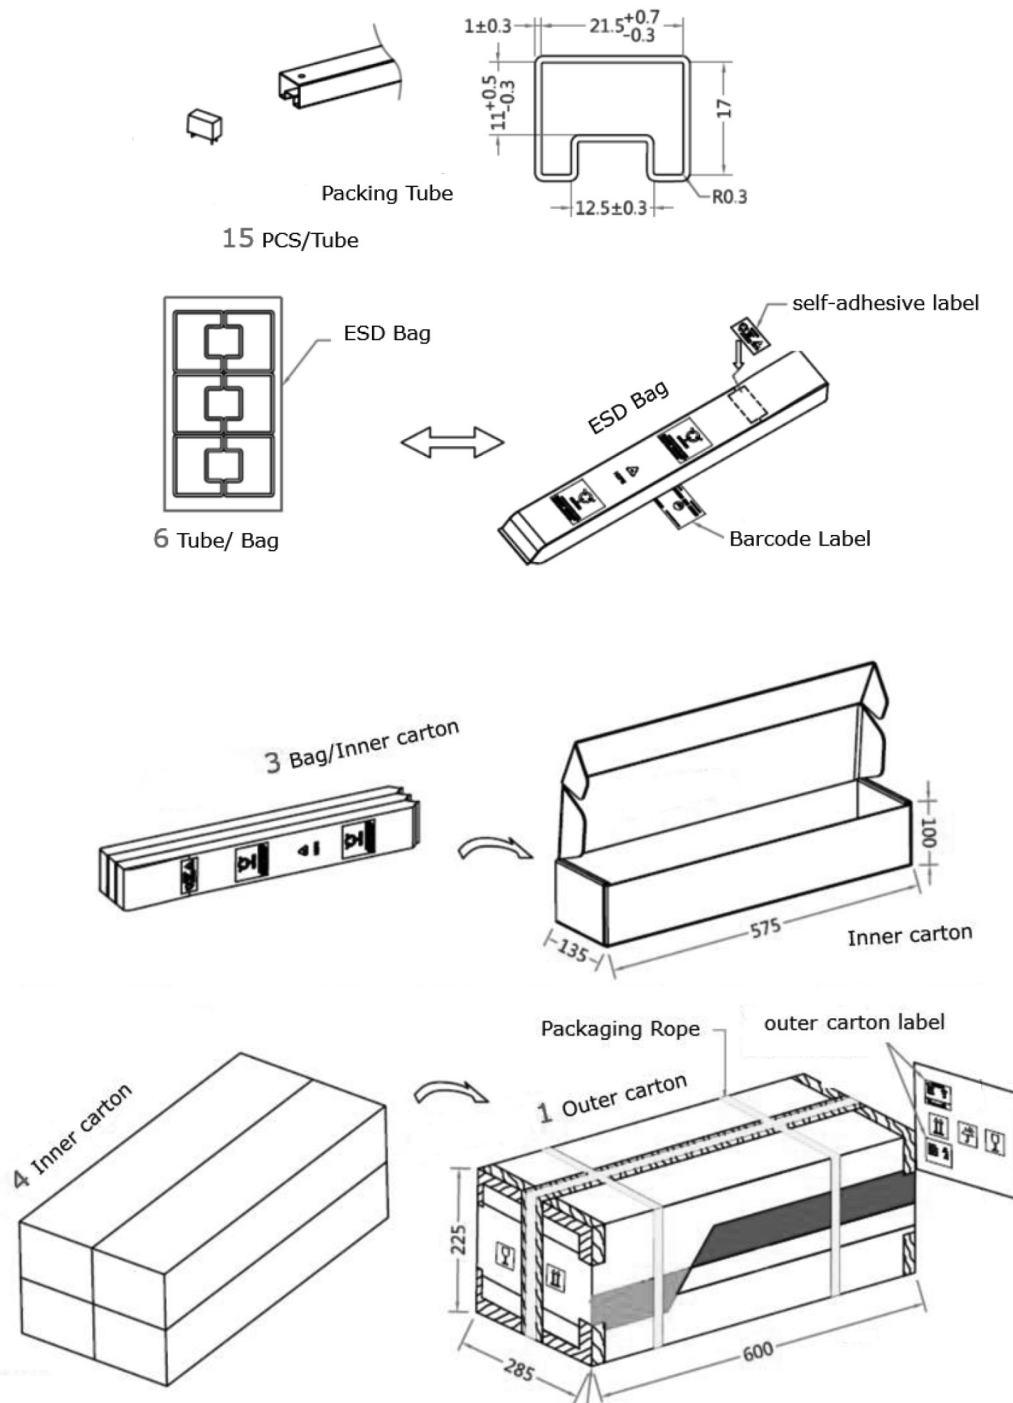

## REVISION HISTORY

---

rev.	description	date
1.0	initial release	02/20/2018

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**<sup>®</sup>

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.