EUROSTYLE P.C.B. TERMINAL BLOCK

TÜV R50002918
E133988(R)


ETB36 SERIES | CLAMPING TYPE, 55° SCREW IN | PITCH=3.81 / 7.62mm

FEATURES

- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- Special wire protector design to ensure reliable wire clamping
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Compact size for P.C.B.

SPECIFICATIONS

Pitch	3.81mm, 7.62mm
Wire range	26~16 AWG (1.5mm²)
No. of pole per block	2P or 3P
Rating	10 Amp, 300 VAC
Housing	PA66
Terminals	Tin plated over Brass
Screws	M2.0x0.4P, Zinc plated over Steel
Wire cage	Nickel plated over Zinc Alloy
Torque	0.2 N-m (1.7 lb-in) (tested by manual torque screwdriver)
Operating temperature	-30℃~+110℃ (includes temperature rise limit)
Stripping length	5mm
UL Approval	300V, 10A, 26~16 AWG
TUV Approval	130V, T100, 0.2 to 1.0mm²

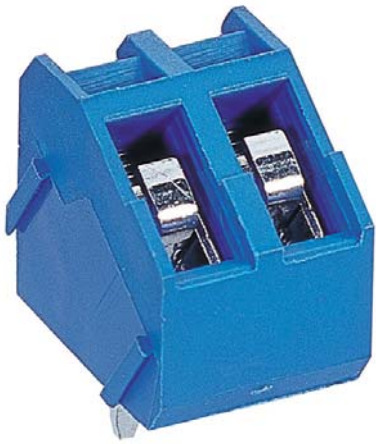


PART NUMBERING SYSTEM

ETB 36 XX X X X 00 Z

- Z: RoHS Compliant
- Special number
- Screw type: 0: “+” screw; 1: “-” screw
- Housing color: B: Blue; G: Green; K: Black
- Pitch: 0: Standard pitch; 1: Standard pitchx2
- Number of poles
- Series
- Model

DRAWING

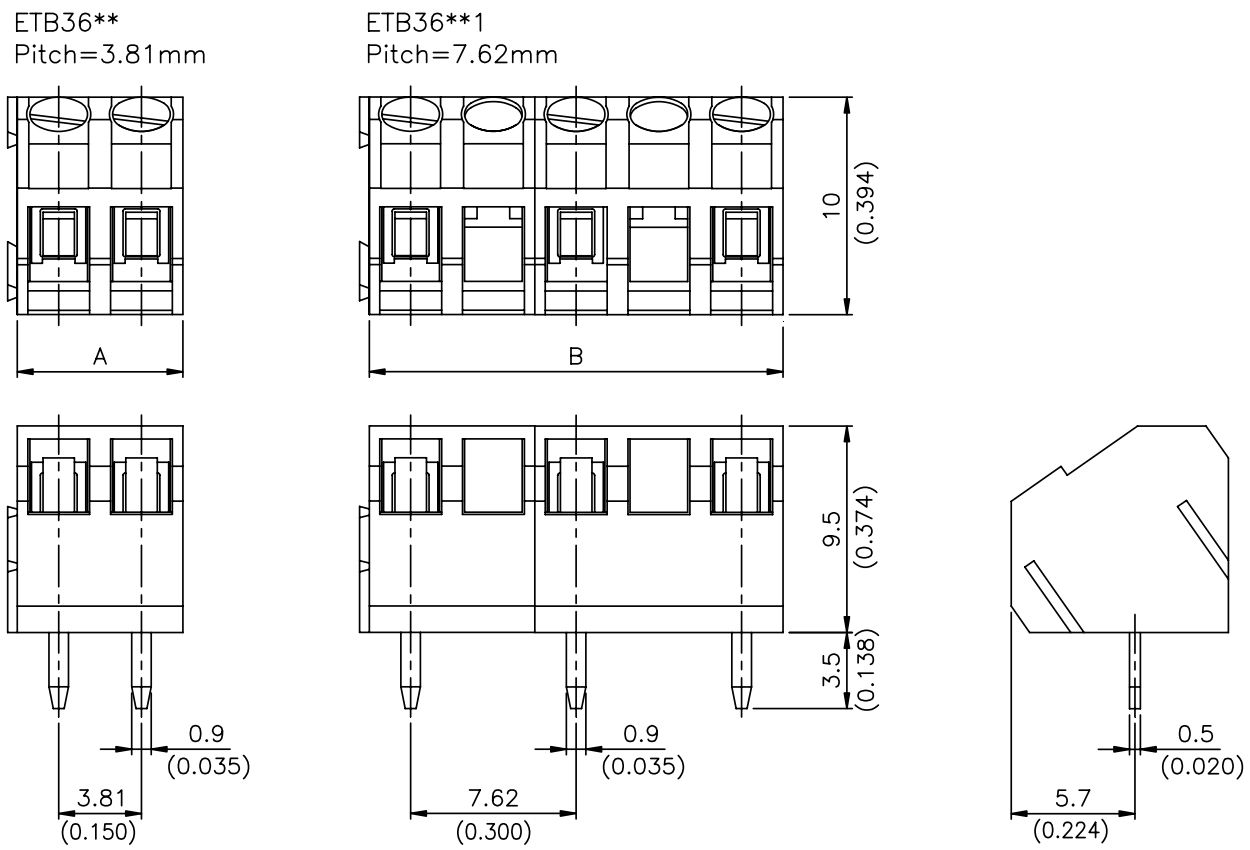

POLE / DIM.	2	3	4	5	6	7	8	9	10	11	12	13
A	7.62 (0.300)	11.43 (0.450)	15.24 (0.600)	19.05 (0.750)	22.86 (0.900)	26.67 (1.050)	30.48 (1.200)	34.29 (1.350)	38.10 (1.500)	41.91 (1.650)	45.72 (1.800)	49.53 (1.950)
B	11.43 (0.450)	19.05 (0.750)	26.67 (1.050)	34.29 (1.350)	41.91 (1.650)	49.53 (1.950)	57.15 (2.250)	64.77 (2.550)	72.39 (2.850)	80.01 (3.150)	87.63 (3.450)	
POLE / DIM.	14	15	16	17	18	19	20	21	22	23	24	
A	53.34 (2.100)	57.15 (2.250)	60.96 (2.400)	64.77 (2.550)	68.58 (2.700)	72.39 (2.850)	76.20 (3.000)	80.01 (3.150)	83.82 (3.300)	87.63 (3.450)	91.44 (3.600)	