


G1338 series

MECHATRONICS®



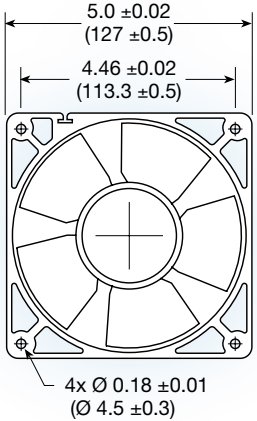

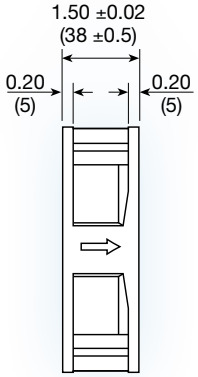

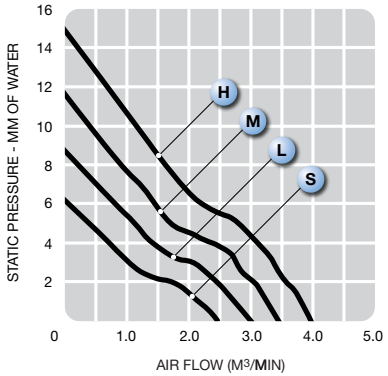

(127 x127 x 38 mm)

5 x 5 x 1.5 inches

Construction:	UL94V-0 PBT impeller & frame
Bearing option:	ball bearing
Connection:	AWG 24, UL1007 lead wires
Frame:	flanged
Protection:	thermal
Options:	tachometer output or locked rotor alarm signal

Model No.	Rated Voltage	Current mA			Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	12	24	48	RPM	M³/Min.	CFM	MM	INCH	dbA	g
G1338S	12/24/48	350	220	130	2,000	2.46	87	6.22	0.24	37	355
G1338L	12/24/48	550	330	180	2,400	3.00	106	8.77	0.35	42	355
G1338M	12/24/48	850	480	250	2,800	3.46	122	11.73	0.46	46	355
G1338H	12/24/48	1200	650	330	3,200	3.99	141	15.10	0.59	49	355