


# NTSA0WC303EE1B0

To be discontinued  
RoHS REACH

## Appearance & Shape

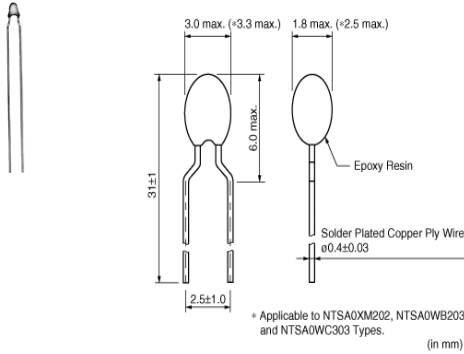

## Features

1. +/-1% of resistance and B-Constant tolerance is realized due to uniform thickness by the precise
2. This product provides faster response time due to its smaller size.
3. Taping type is available.
4. Original lead-wiring technique assures reliable connection. It can be formed and be

## Applications

- |             |   |
|-------------|---|
| Other Usage | <ol style="list-style-type: none"> <li>1. Rechargeable batteries</li> <li>2. Battery charging circuits</li> </ol> |
|-------------|---|


## Packaging Information

Packaging	Specifications	Minimum Order Quantity
B0	Bulk(Bag)	500

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2. This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# NTSA0WC303EE1B0



## Specifications

Resistance (25°C)	30kΩ
Resistance Value Tolerance (at 25°C)	±3%
B-Constant (25/50°C)	4100K
B-Constant (25/50°C) Tolerance	±1%
B-Constant (25/80°C) (Reference Value)	4128K
B-Constant (25/85°C) (Reference Value)	4130K
B-Constant (25/100°C) (Reference Value)	4147K
Permissible Operating Current (25°C)	0.26mA
Rated Electric Power (25°C)	21mW
Typical Dissipation Constant (25°C)	2.1mW/°C
Thermal Time Constant	7s
Operating Temperature Range	-40°C to 125°C
Lead Shape	Lead Wire type
Shape	Lead


### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# NTSA0WC303EE1B0

## Product Data

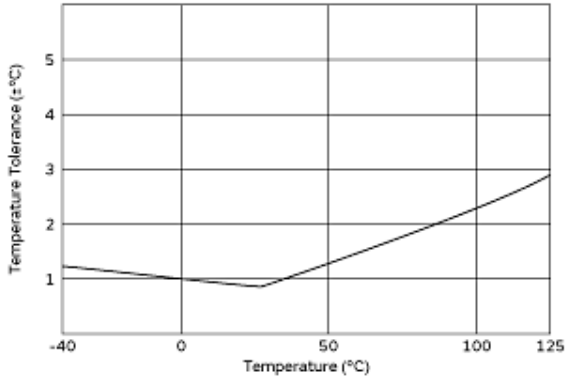

Temperature Tolerance-Temperature Characteristics

**Attention**

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.