


Single-Phase Bridge Rectifier, 35A MP3506S Thru MP3512S

FEATURES

- UL recognition file number E320098 
- High surge current capability
- Low thermal resistance
- Solder dip 260°C, 40s
- Compliant to RoHS



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for power supply, home appliances, office equipment, industrial automation applications.

MECHANICAL DATA

Case: GBPC / MP



Epoxy meets UL 94 V-O flammability rating

Terminals: Nickel or silver plated on wire leads, solderable per J-STD-002 and JESD22-B102. Suffix letter "S" added to indicate wire leads (e.g. MP3506S).

Polarity: As marked

Mounting Torque: 20 inches-lbs. max. (M5 screw)

Weight: 21g (0.74 ozs)

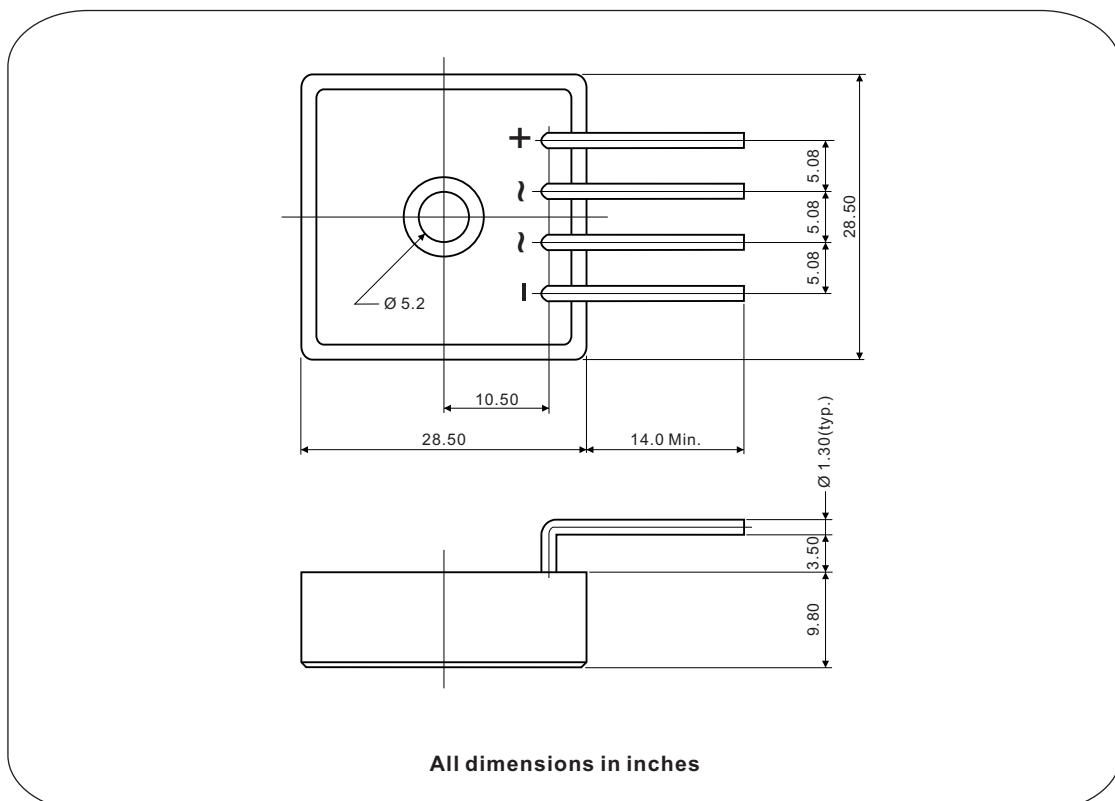

PRIMARY CHARACTERISTICS	
$I_{F(AV)}$	35A
V_{RRM}	600V to 1200V
I_{FSM}	400A
I_R	2 μ A
V_F	1.1V
$T_{Jmax.}$	150°C

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER	SYMBOL	MP35..S				UNIT
		06	08	10	12	
Maximum repetitive peak reverse voltage	V_{RRM}	600	800	1000	1200	V
Maximum RMS voltage	V_{RMS}	420	560	700	840	V
Maximum DC blocking voltage	V_{DC}	600	800	1000	1200	V
Maximum average forward rectified output current (Fig.1)	$I_{F(AV)}$	35				A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	400				A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I^2t	660				A ² s
RMS isolation voltage from case to leads	V_{ISO}	2500				V
Operating junction storage temperature range	T_J	-40 to 150				°C
Storage temperature range	T_{STG}	-25 to 125				°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	TEST CONDITIONS	SYMBOL	MP35..S				UNIT
			06	08	10	12	
Maximum instantaneous forward drop per diode	$I_F = 17.5\text{A}$	V_F	1.1				V
Maximum reverse DC current at rated DC blocking voltage per diode	$T_A = 25^\circ\text{C}$	I_R	2				μ A
	$T_A = 150^\circ\text{C}$		3000				
Typical junction capacitance per diode	4V, 1MHz	C_J	300				pF

THERMAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER	SYMBOL	MP35..S				UNIT
		06	08	10	12	
Typical thermal resistance	$R_{\theta JC}^{(1)}$	1.4				°C/W

Notes

- (1) With heatsink
- (2) Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with M5 screw

Fig.1 On-state current and voltage

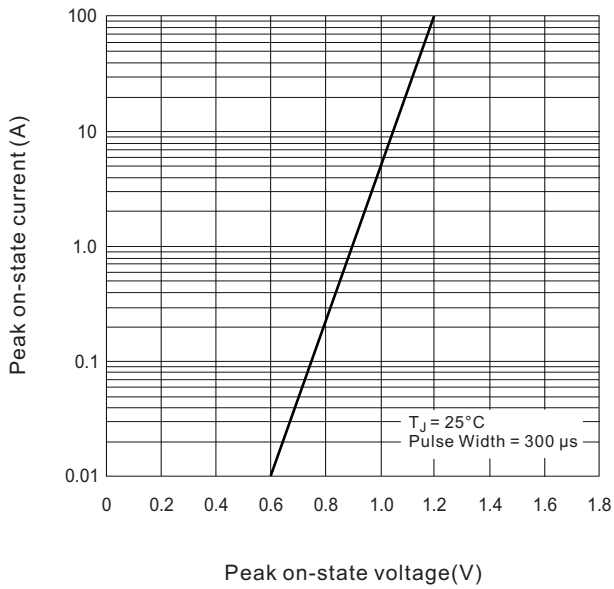


Fig.2 Case temperature vs on-state average current

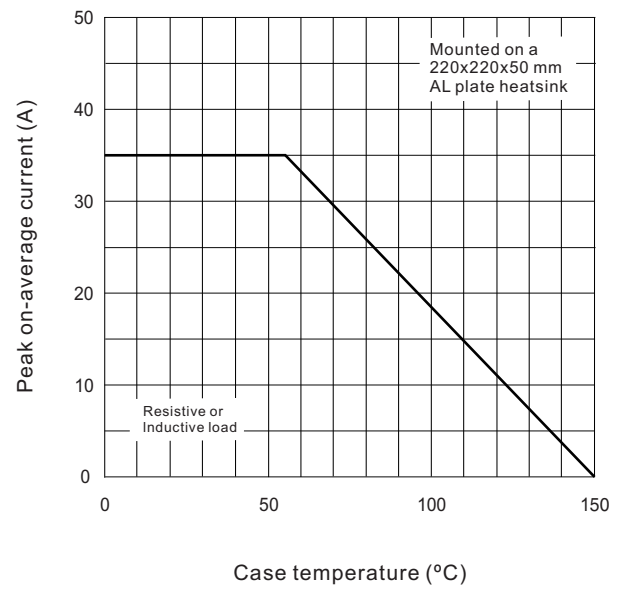


Fig.3 On-state surge current vs. cycles

