


SHEET 1 OF 1

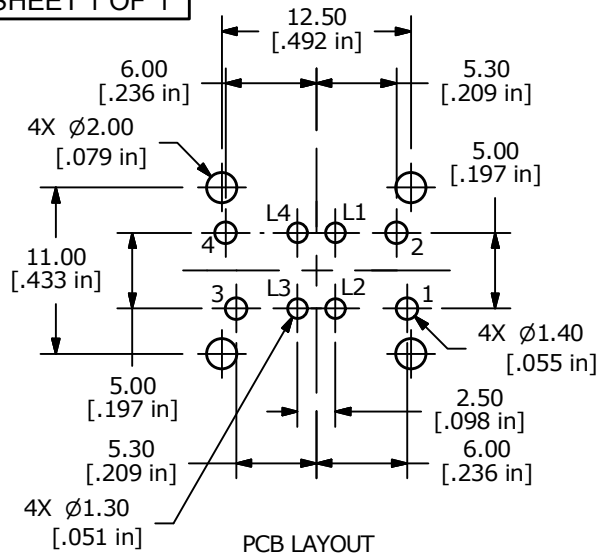


PCB LAYOUT

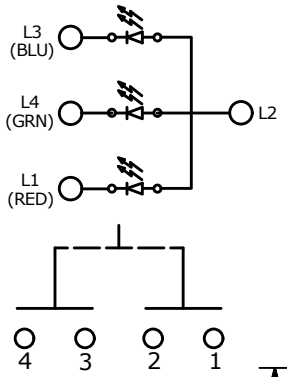



▲ CIRCUIT: DPST
(MOMENTARY)





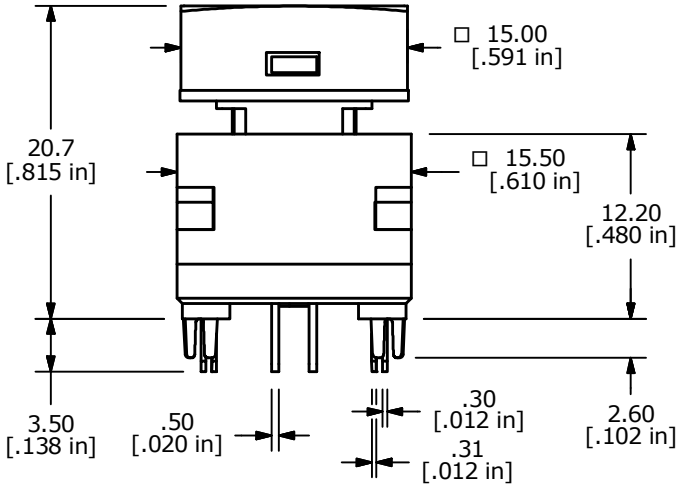

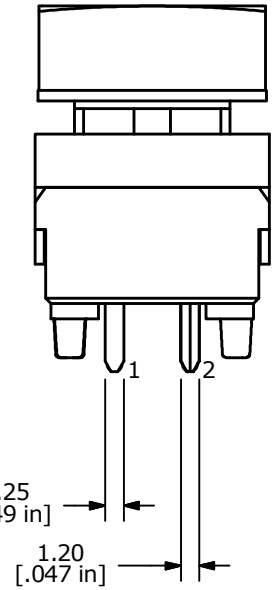

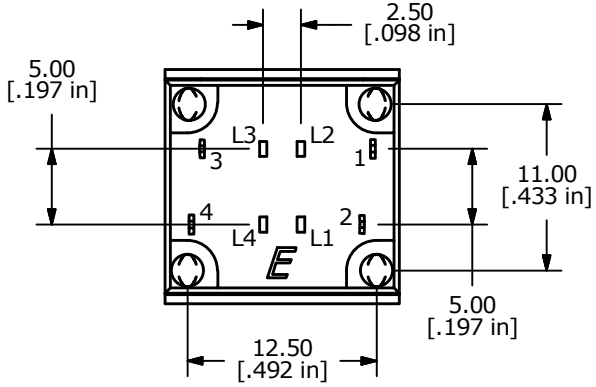

▲ LED SPECS	UNITS	RED	GREEN	BLUE
FORWARD CURRENT	mA	20	20	20
FORWARD VOLTAGE @ 20mA	VDC	1.7-2.2	1.8-2.4	2.7-3.7
LUMINOUS INTENSITY @ 20mA	mcd	230	410	585

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 12mA; DPST
5. CONTACT MATERIAL: GOLD
6. CONTACT RESISTANCE: 50 MILLI-OHM MAX.
7. INSULATION RESISTANCE: 500VDC, 100 MEGA-OHM MIN.
▲ 8. OPERATING FORCE: 200± 150GF
9. OPERATING LIFE: 200,000 CYCLES
10. OPERATING TEMP: -20°C TO +70°C
▲ 11. LED COLORS: RED, GREEN, BLUE
12. TRAVEL: 2.20mm±0.20
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
B	22357	SHOW "E" ON THE BOTTOM VIEW	6/16/16	MW
A	21140	INITIAL RELEASE	6/6/13	EBP

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE LP6OA2ASRGB

SCALE	DATE	DR	DWG	REV
2:1	6/6/2013	EBP	B220015	B