
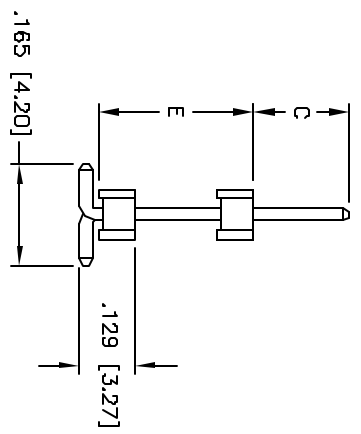
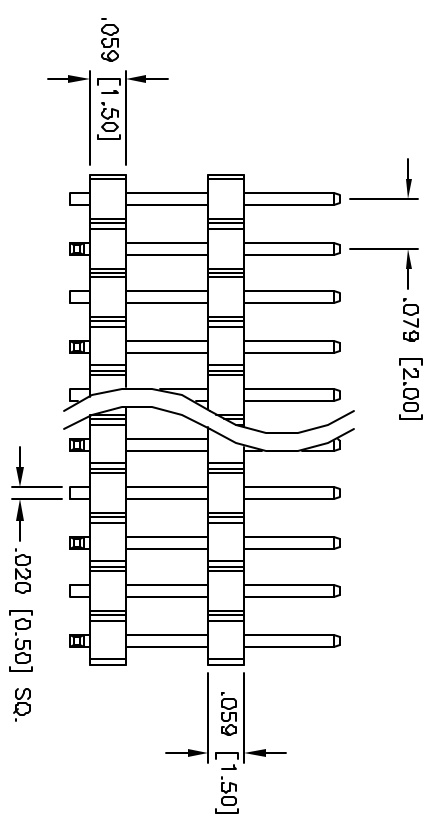
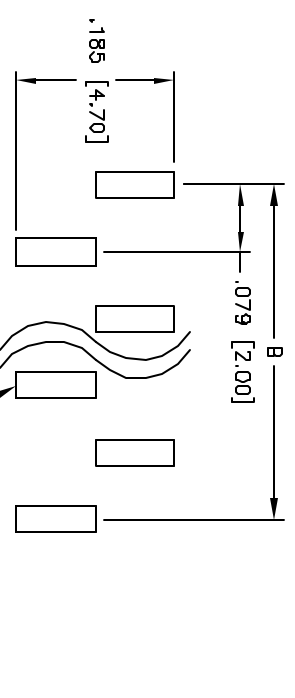


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/05	

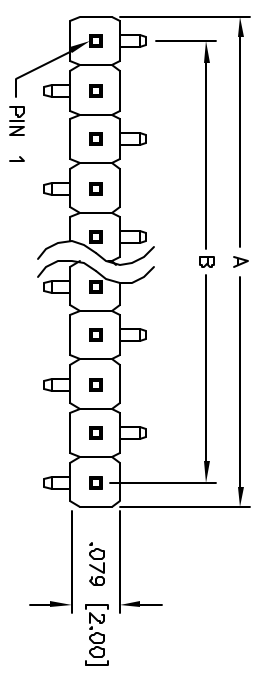

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 Mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds

Positions: 1 thru 40
 A = .079 [2.00] x No. of Positions
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE NICHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: ±.10 HOLE ±.10
 .XX ±.020 ØXXX ±.010
 .XXX ±.015 ØXXX

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.079 [2.00] SINGLE ROW PIN HEADER**
 DUAL INSULATOR, SURFACE MOUNT, TYPE A

APPROVALS	DATE	SIZE	PART NO.	SCALE	SHEET	OF
DRAWN	SS	4/1/05	D2PH-1-XX-U-C/SMT/E-A	MIB	1	1
CHECKED						
APPROVED						

