SHEET OF

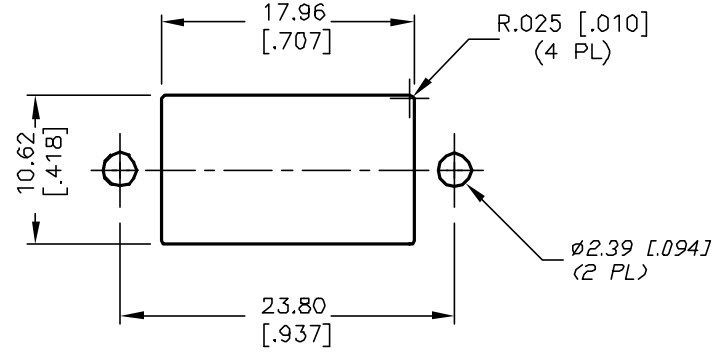

RECOMMENDED PANEL MOUNTING

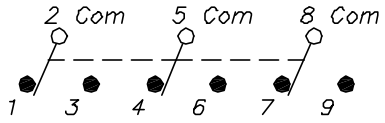

CIRCUIT: 3PDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3,5-6,8-9	OPEN	2-1,5-4,8-7

( )=MOMENTARY

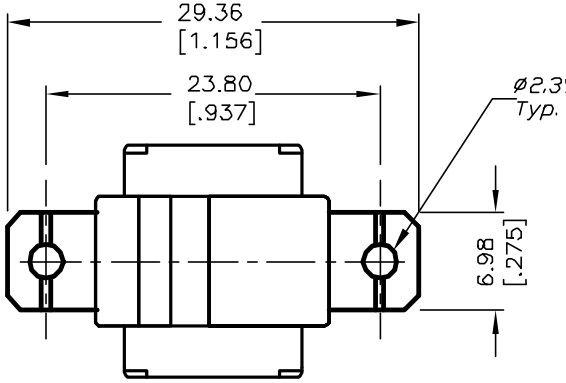

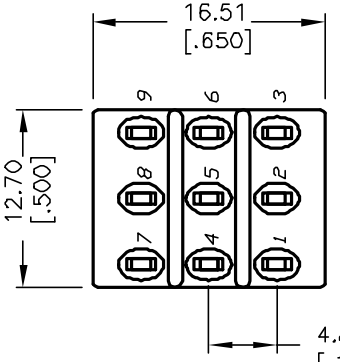

BOTTOM VIEW

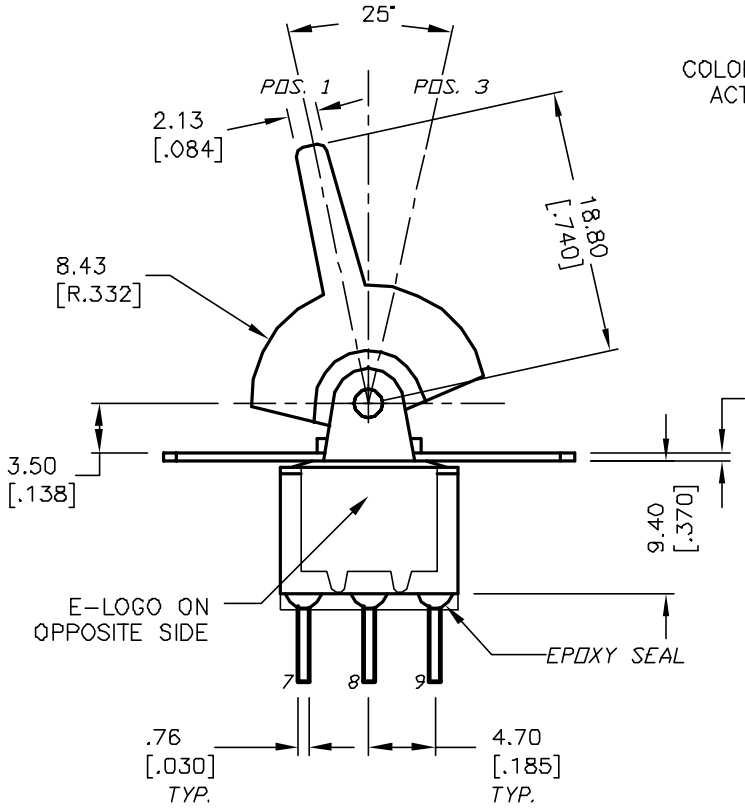

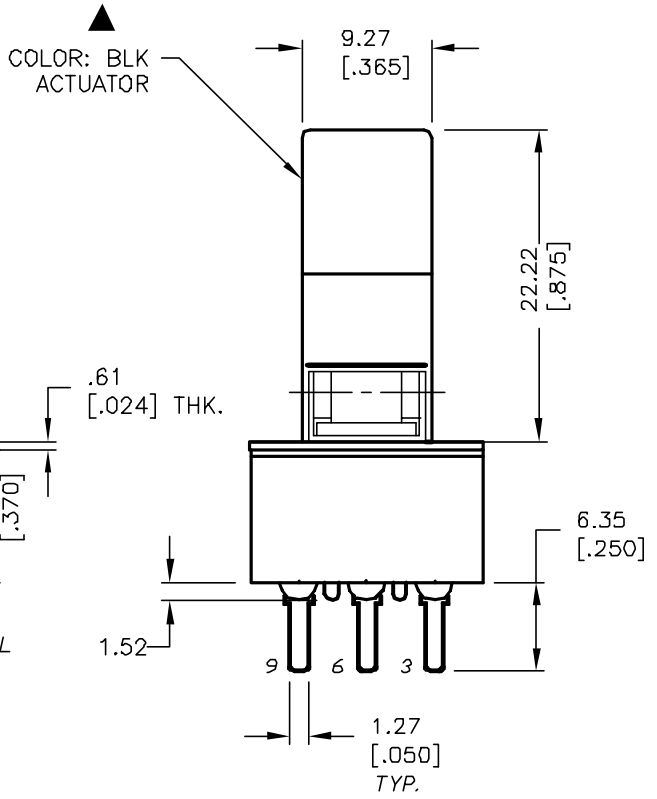

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A @120VAC or 28VDC:
   2A @250VAC
5. FIXED TERM/MOVING CONTACT:
   COPPER ALLOY W/SILVER PLATE.
6. ELECTRICAL LIFE:
   50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -30°C to +85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12067	RELEASED FOR PRODUCTION	4/15/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE				
300 3P2 R2 (BLK) M2 Q E				
SCALE	DATE	DR	DWG	REV
2:1	4/15/02	CJB	T333004	A