
Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065
TEL: (805) 522-9998 FAX: (805) 522-9989
E-mail: frontiersales@frontierusa.com
Web: http://www.frontierusa.com

1.5A FAST RECOVERY PLASTIC RECTIFIER
BYD34DP THRU BYD34MP

FEATURES
- FAST RECOVERY TIMES
- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND
- DIFFUSED JUNCTION
- LOW COST
- HIGH SURGE CURRENT CAPABILITY

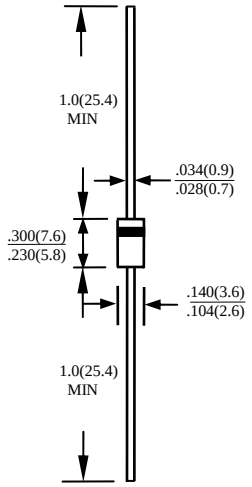

MECHANICAL DATA
- CASE: TRANSFER MOLDED, DO15, DIMENSIONS IN INCHES AND (MILLIMETERS)
- LEADS: SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: CATHODE INDICATED BY COLOR BAND
- WEIGHT: 0.4 GRAMS

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BYD34DP	BYD34GP	BYD34JP	BYD34KP	BYD34MP	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375”(9.5mm) LEAD LENGTH AT TA=55°C	I_O	2.0					A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	60					A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_J	40					PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	30					℃/W
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150					℃
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 150					℃


ELECTRICAL CHARACTERISTICS (A_T T_A =25°C UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BYD34DP	BYD34GP	BYD34JP	BYD34KP	BYD34MP	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	1.2					V
MAXIMUM REVERSE CURRENT AT 25℃	I_R	5					μA
MAXIMUM REVERSE CURRENT AT 100℃	I_R	50					μA
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T_{RR}	150		250	300		nS

NOTE: 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE 0F 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEAT SINK 35×35×1t(mm) COPPER PLATE AT LEAD LENGTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

RATINGS AND CHARACTERISTIC CURVE BYD34DP THRU BYD34MP

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

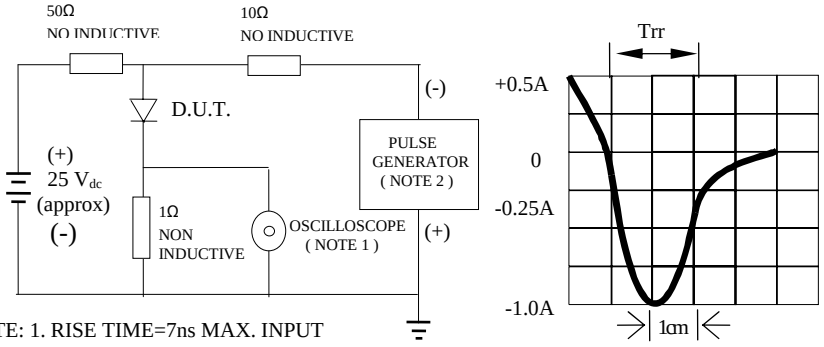

NOTE: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1 MOhms 22PF
2. RISE TIME =10ns MAX. SOURCE IMPEDANCE=50OHMS

SET TIME BASE
FOR 10/20 ns/cm

Fig. 2-MAXIMUM CURRENT DERATING CURVE

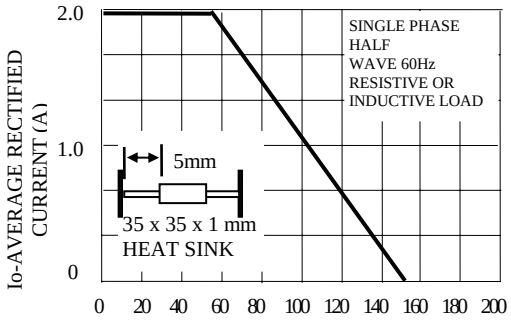


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

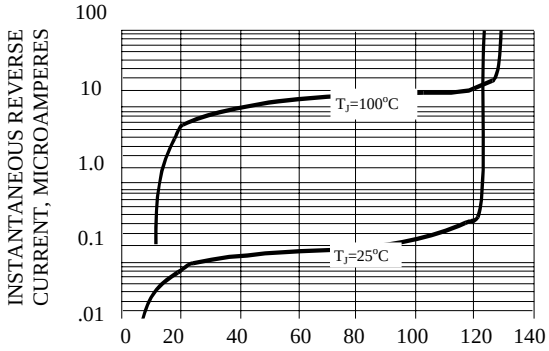


Fig. 4-MAXIMUM FORWARD SURGE NUMBER OF CYCLES

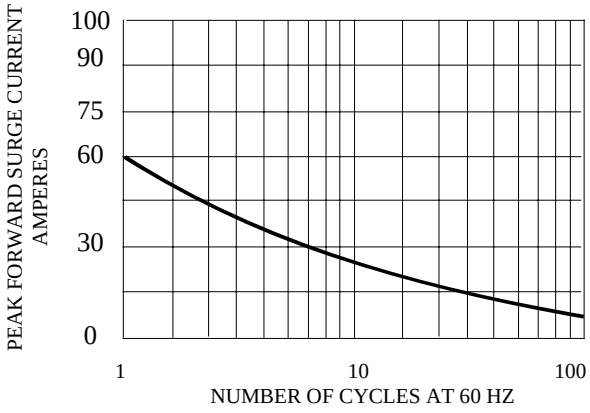


FIG. 5-TYPICAL JUNCTION CAPACITANCE

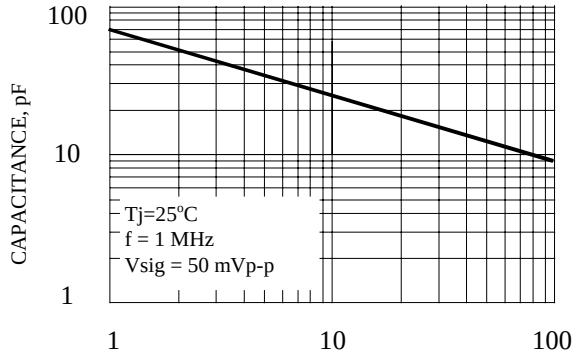


FIG. 6-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

