
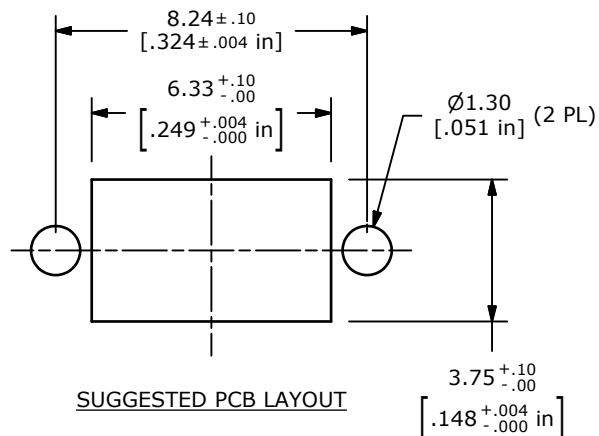

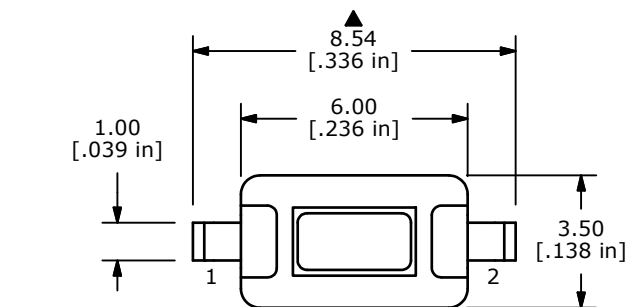



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERM. NOS. FOR REF. ONLY
3. GENERAL TOLERANCE: x.x =  $\pm 0.4$   
x.xx =  $\pm 0.25$
- ▲ 4. RATING: 50mA @ 12 VDC
5. TRAVEL: 0.25 mm +0.2 / -0.1
6. CONTACT RESISTANCE: 100m OHMS MAX.
7. LIFE CYCLES: 50,000 CYCLES MIN.
8. PACKAGE: BULK 1,000 PCS PER BAG
- ▲ 9. OPERATING FORCE: 130  $\pm$  50 gf
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

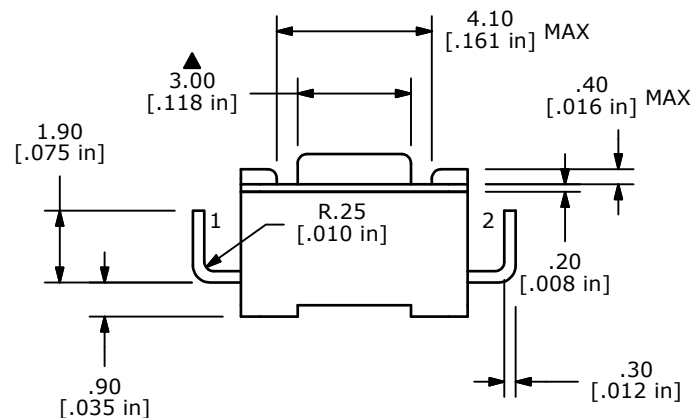

TITLE TL1107AF130EQ

|     |        |                     |         |     |
|-----|--------|---------------------|---------|-----|
| F   | 19955  | REVISED AND REDRAWN | 5/17/11 | BGL |
| REV | PCR NO | DESCRIPTION         | DATE    | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 5:1

DATE 5/17/2011

DR BGL

DWG P010316

REV F