

D10XB60H

PRV : 600 Volts
I_o : 10 Amperes


FEATURES :

- * Glass passivated junction chip
- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Ideal for printed circuit board
- * Very good heat dissipation
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : Reliable low cost construction utilizing molded plastic technique
- * Epoxy : UL94V-0 rate flame retardant
- * Terminals : Plated lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 4.28 grams

SILICON BRIDGE RECTIFIER

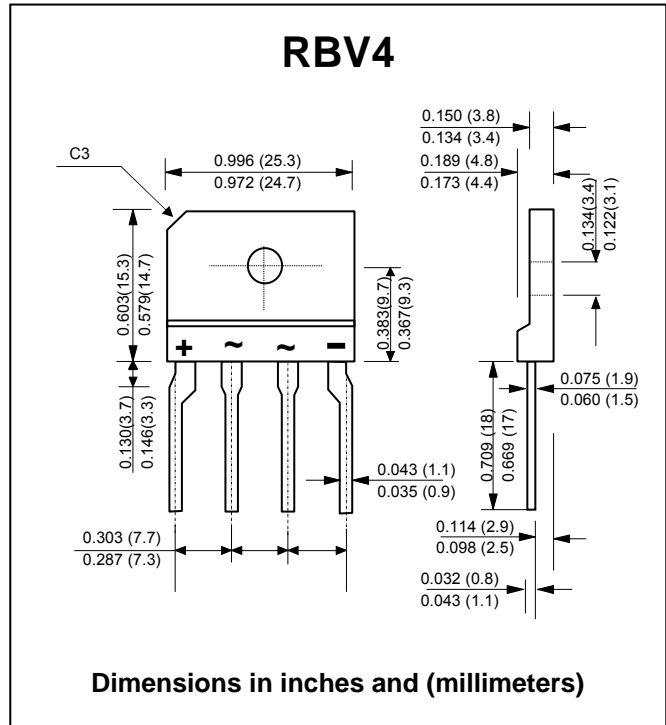

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNIT
Maximum Peak Reverse Voltage	V_{RM}	600	V
Maximum Average Forward Current (50Hz Sine wave, R-load)	I_o	10 2.9	A
Maximum Peak Forward Surge Current, $T_j = 25\text{ }^\circ\text{C}$ (50Hz sine wave, Non-repetitive 1 cycle peak value)	I_{FSM}	170	A
Current Squared Time at $1\text{ms} \leq t < 10\text{ms}$, $T_j = 25\text{ }^\circ\text{C}$	I^2t	110	A ² S
Maximum Forward Voltage per Diode at $I_F = 5.0\text{ A}$ (Pulse measurement, Rating of per diode)	V_F	1.05	V
Maximum DC Reverse Current, $V_R = V_{RM}$ (Pulse measurement, Rating of per diode)	I_R	10	μA
Maximum Thermal Resistance, Junction to case, With heatsink	$R_{\theta JC}$	1.9	$^\circ\text{C/W}$
Maximum Thermal Resistance, Junction to Ambient, Without heatsink	$R_{\theta JA}$	26	$^\circ\text{C/W}$
Maximum Thermal Resistance, Junction to Lead, Without heatsink	$R_{\theta JL}$	6	$^\circ\text{C/W}$
Operating Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 40 to + 150	$^\circ\text{C}$

RATING AND CHARACTERISTIC CURVES (D10XB60H)

FIG.1 - DERATING CURVE

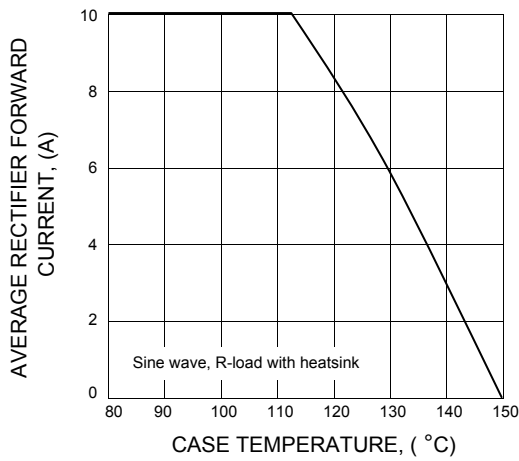


FIG.2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

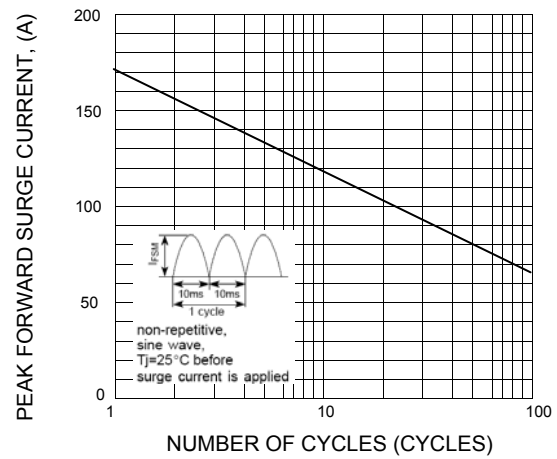


FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE

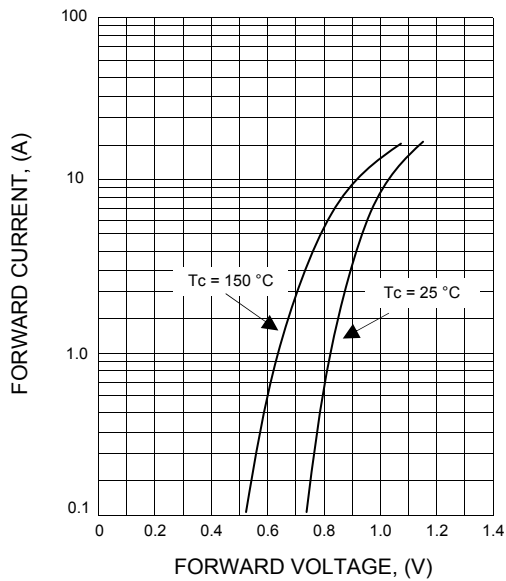


FIG.4 - POWER DISSIPATION

