
0.2A, 60V SILICON N-CHANNEL MOSFET



SOT-323


■ DESCRIPTION

The UTC **02N06Z** is a silicon N-channel MOSFET, it uses UTC's advanced technology to provide the customers with a minimum on state resistance, high switching speed and low gate charge.

■ FEATURES

* $R_{DS(ON)}$<2.4Ω @ V_{GS}=10V, I_D=200mA
  $R_{DS(ON)}$<4.0Ω @ V_{GS}=4V, I_D=200mA
* High switching speed
* Low gate charge
* High ESD

■ SYMBOL




■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
02N06ZL-AL3-R	02N06ZG-AL3-R	SOT-323	S	G	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

02N06ZL-AL3-R (1)Packing Type (2)Package Type (3)Lead Free	(1) R: Tape Reel (2) AL3: SOT-323 (3) L: Lead Free, G: Halogen Free

■ MARKING



Copyright © 2013 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	60	V
Gate-Source Voltage		V_{GSS}	±20	V
Drain Current	Continuous	I_D	200	mA
	Pulsed (Note 2)	I_{DM}	800	mA
Source Current	Continuous	I_S	200	mA
	Pulsed (Note 2)	I_{SP}	800	mA
Power Dissipation (Note 3)		P_D	200	mW
Channel Temperature		T_{CH}	150	°C
Storage Temperature Range		T_{STG}	-55~+150	°C


Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Pw≤10μs, Duty cycle≤1%.
3. Each terminal mounted on a recommended.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	I_D=10μA, V_{GS}=0V	60			V
Drain-Source Leakage Current		I_{DSS}	V_{DS}=60V, V_{GS}=0V			1	μA
Gate-Source Leakage Current	Forward	I_{GSS}	V_{GS}=+20V, V_{DS}=0V			+10	μA
	Reverse		V_{GS}=-20V, V_{DS}=0V			-10	μA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS}=10V, I_D=1mA	1		2.5	V
Static Drain-Source On-State Resistance (Note 2)		$R_{DS(ON)}$	V_{GS}=10V, I_D=200mA		1.7	2.4	Ω
			V_{GS}=4V, I_D=200mA		2.8	4.0	Ω
Forward Transfer Admittance (Note 2)		$\|Y_{FS}\|$	V_{DS}=10V, I_D=200mA	100			mS
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	V_{GS}=0V, V_{DS}=10V, f=1.0MHz		15		pF
Output Capacitance		C_{OSS}			8		pF
Reverse Transfer Capacitance		C_{RSS}			4		pF
SWITCHING PARAMETERS (Note 3)							
Total Gate Charge		Q_G	V_{GS}=10V, V_{DD}=30V, I_D=200mA		2.2	4.4	nC
Gate to Source Charge		Q_{GS}			0.6		nC
Gate to Drain Charge		Q_{GD}			0.3		nC
Turn-ON Delay Time		$t_{D(ON)}$	V_{DD}=30V, V_{GS}=10V, I_D=100mA, R_{GS}=10Ω, R_L=300Ω		6		ns
Rise Time		t_R			5		ns
Turn-OFF Delay Time		$t_{D(OFF)}$			12		ns
Fall-Time		t_F			95		ns

Notes: 1. Pw≤300μs, Duty cycle≤1%.
2. Pulsed


■ TEST CIRCUITS AND WAVEFORMS

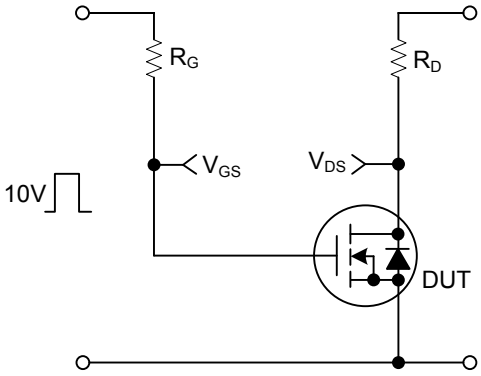


Resistive Switching Test Circuit

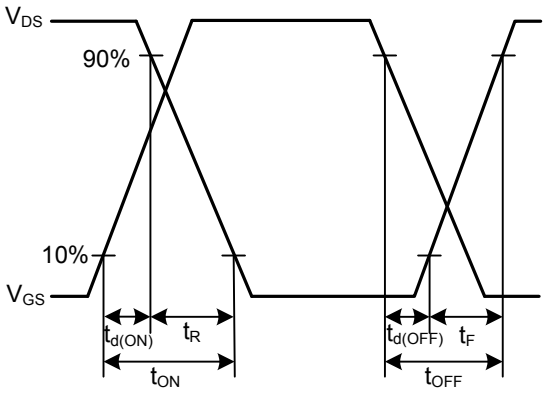

Resistive Switching Waveforms

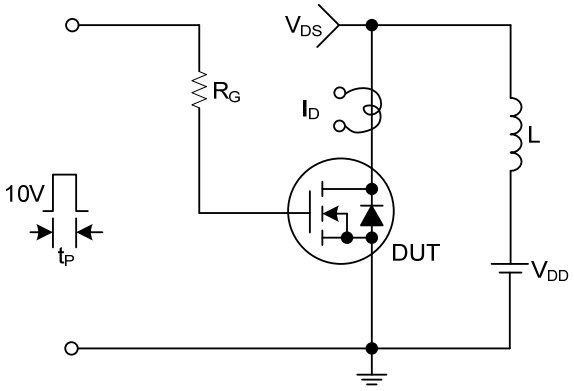

Unclamped Inductive Switching Test Circuit

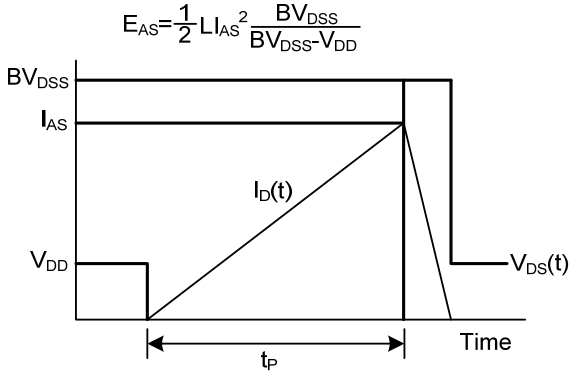

Unclamped Inductive Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.