
- **Independent Registers and Enables for A and B Buses**
- **Multiplexed Real-Time and Stored Data**
- **Flow-Through Architecture Optimizes PCB Layout**
- **Center-Pin V_{CC} and GND Configurations Minimize High-Speed Switching Noise**
- ***EPIC***™ **(Enhanced-Performance Implanted CMOS) 1-μm Process**
- **500-mA Typical Latch-Up Immunity at 125°C**

DW PACKAGE
(TOP VIEW)

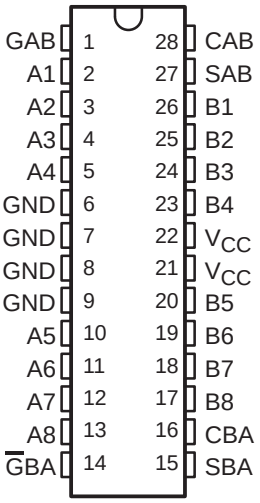

description

This device consists of bus transceiver circuits, D-type flip-flops, and control circuitry arranged for multiplexed transmission of data directly from the data bus or from the internal storage registers. Enable GAB and $\overline{G}$BA are provided to control the transceiver functions. SAB and SBA control pins are provided to select whether real-time or stored data is transferred. The circuitry used for select control eliminates the typical decoding glitch that occurs in a multiplexer during the transition between stored and real-time data. A low input level selects real-time data, and a high selects stored data. Figure 1 illustrates the four fundamental bus-management functions that can be performed with the octal bus transceivers and registers.

Data on the A or B data bus, or both, can be stored in the internal D flip-flops by low-to-high transitions at the appropriate clock pins (CAB or CBA), regardless of the select or enable control pins. When SAB and SBA are in the real-time transfer mode, it is also possible to store data without using the internal D-type flip-flops by simultaneously enabling GAB and $\overline{G}$BA. In this configuration, each output reinforces its input. Thus, when all other data sources to the two sets of bus lines are at high impedance, each set of bus lines remains at its last state.

The 74ACT11652 is characterized for operation from –40°C to 85°C.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC is a trademark of Texas Instruments Incorporated.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1996, Texas Instruments Incorporated

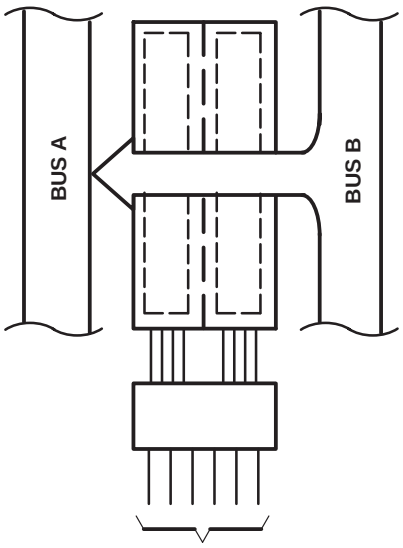


GAB	$\overline{G}$BA	CAB	CBA	SAB	SBA
L	L	X	X	X	L

REAL-TIME TRANSFER BUS B TO BUS A

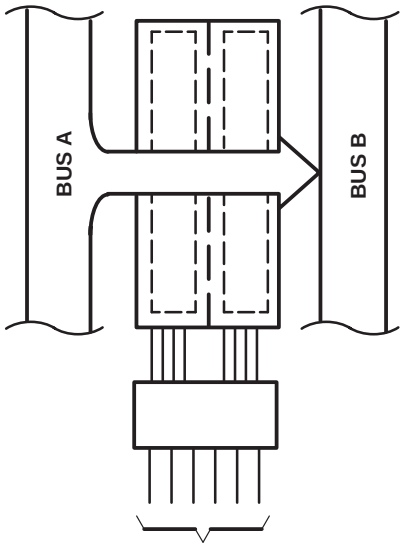


GAB	$\overline{G}$BA	CAB	CBA	SAB	SBA
H	H	X	X	L	X

REAL-TIME TRANSFER BUS A TO BUS B

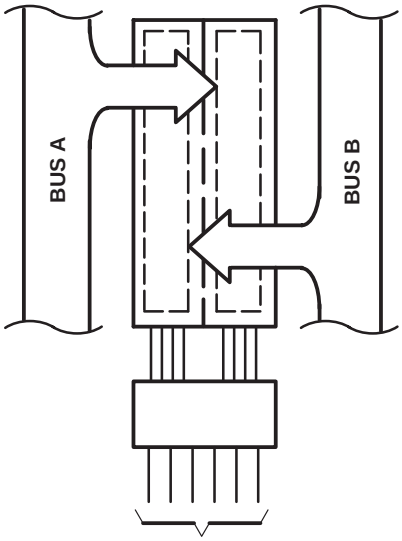

GAB	$\overline{G}$BA	CAB	CBA	SAB	SBA
X	H	↑	X	X	X
L	X	X	↑	X	X
L	H	↑	↑	X	X

STORAGE FROM A AND/OR B

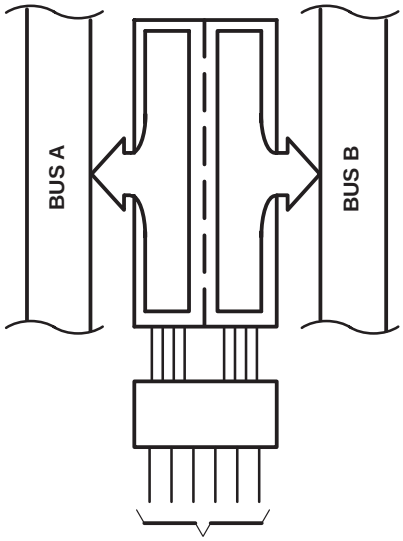

GAB	$\overline{G}$BA	CAB	CBA	SAB	SBA
L	L	H or L	H or L	X	H

TRANSFER STORED DATA TO A AND/OR B


Figure 1. Bus Transfer Diagram

FUNCTION TABLE

INPUTS						DATA I/O†		OPERATION OR FUNCTION
GAB	$\overline{GBA}$	CAB	CBA	SAB	SBA	A1–A8	B1–B8	
L	H	H or L	H or L	X	X	Input	Input	Isolation
L	H	↑	↑	X	X			Store A and B data
X	H	↑	H or L	X	X	Input	Unspecified†	Store A, hold B
H	H	↑	↑	X‡	X	Input	Output	Store A in both registers
L	X	H or L	↑	X	X	Unspecified†	Input	Hold A, store B
L	L	↑	↑	X	X‡	Output	Input	Store B in both registers
L	L	X	X	X	L	Output	Input	Real-time B data to A bus
L	L	X	H or L	X	H			Stored B data to A bus
H	H	X	X	L	X	Input	Output	Real-time A data to B bus
H	H	H or L	X	H	X			Stored A data to B bus
H	L	H or L	H or L	H	H	Output	Output	Stored A data to B bus and stored B data to A bus


† The data-output functions may be enabled or disabled by various signals at the GAB or $\overline{GBA}$ inputs. Data-input functions are always enabled, i.e., data at the bus terminals is stored on every low-to-high transition on the clock inputs.
‡ Select control = L: clocks can occur simultaneously. Select control = H: clocks must be staggered to load both registers.

logic symbol§

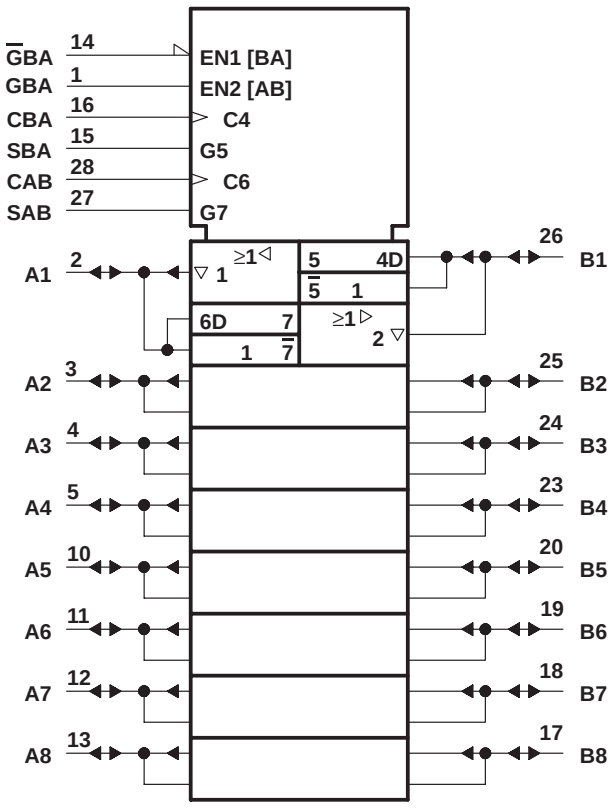

§ This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

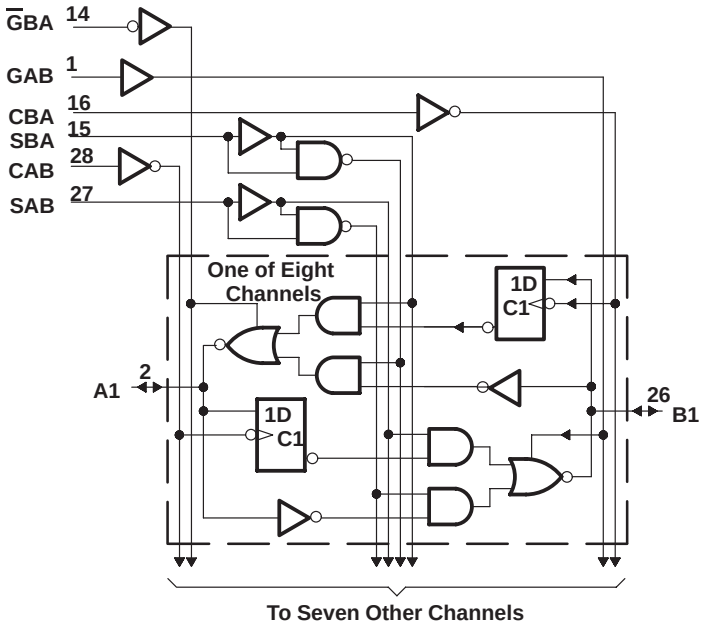

absolute maximum rating over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC} . . . . . –0.5 V to 7 V
Input voltage range, V_I (see Note 1) . . . . . –0.5 V to V_{CC} + 0.5 V
Output voltage range, V_O (see Note 1) . . . . . –0.5 V to V_{CC} + 0.5 V
Input clamp current, I_{IK} (V_I < 0 or V_I > V_{CC}) . . . . . ±20 mA
Output clamp current, I_{OK} (V_O < 0 or V_O > V_{CC}) . . . . . ±50 mA
Continuous output current, I_O (V_O = 0 to V_{CC}) . . . . . ±50 mA
Continuous current through V_{CC} or GND . . . . . ±200 mA
Maximum power dissipation at T_A = 55°C (in still air) (see Note 2) . . . . . 1.7 W
Storage temperature range, T_{stg} . . . . . –65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
2. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils.

recommended operating conditions (see Note 3)

		MIN	MAX	UNIT
V_{CC}	Supply voltage	4.5	5.5	V
V_{IH}	High-level input voltage	2		V
V_{IL}	Low-level input voltage		0.8	V
V_I	Input voltage	0	V_{CC}	V
V_O	Output voltage	0	V_{CC}	V
I_{OH}	High-level output current		–24	mA
I_{OL}	Low-level output current		24	mA
$\Delta t/\Delta V$	Input transition rise or fall rate	0	10	ns/V
T_A	Operating free-air temperature	–40	85	°C

NOTE 3: Unused inputs must be held high or low to prevent them from floating.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	V_{CC}	T_A = 25°C			MIN	MAX	UNIT
				MIN	TYP	MAX			
V_{OH}		I_{OH} = – 50 μA	4.5 V	4.4			4.4		V
			5.5 V	5.4			5.4		
		I_{OH} = – 24 mA	4.5 V	3.94			3.8		
			5.5 V	4.94			4.8		
		I_{OH} = – 75 mA†	5.5 V				3.85		
V_{OL}		I_{OL} = 50 μA	4.5 V			0.1		0.1	V
			5.5 V			0.1		0.1	
		I_{OL} = 24 mA	4.5 V			0.36		0.44	
			5.5 V			0.36		0.44	
		I_{OL} = 75 mA†	5.5 V					1.65	
I_{OZ}	A or B ports‡	$V_O = V_{CC}$ or GND	5.5 V			±0.5		±5	μA
I_I	GAB or $\overline{G}$BA	$V_I = V_{CC}$ or GND	5.5 V			±0.1		±1	μA
I_{CC}		$V_I = V_{CC}$ or GND, I_O = 0	5.5 V			8		80	μA
ΔI_{CC}§		One input at 3.4 V, Other inputs at GND or V_{CC}	5.5 V			0.9		1	mA
C_i	GAB or $\overline{G}$BA	$V_I = V_{CC}$ or GND	5 V		4.5				pF
C_o	A or B ports	$V_O = V_{CC}$ or GND	5 V		12				pF

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.
‡ For I/O ports, the parameter I_{OZ} includes the input leakage current.
§ This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC}.

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 2)

PARAMETER		T_A = 25°C		MIN	MAX	UNIT
		MIN	MAX			
f_{clock}	Clock frequency	0	105	0	105	MHz
t_w	Pulse duration, CAB or CBA high or low	4.8		4.8		ns
t_{su}	Setup time, A before CLK↑ or B before CBA↑	4		4		ns
t_h	Hold time, A after CAB↑ or B after CBA↑	2.5		2.5		ns

switching characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 2)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	T_A = 25°C			MIN	MAX	UNIT
			MIN	TYP	MAX			
f_{max}			105			105		MHz
t_{PLH}	A or B	B or A	3.8	7	9.9	3.8	11.1	ns
t_{PHL}			3.4	6.7	10.7	3.4	11.6	
t_{PLH}	CBA or CAB	A or B	5.4	8.4	11.8	5.4	13.1	ns
t_{PHL}			6.1	9.4	13.1	6.1	14.4	
t_{PLH}	SBA or SAB† with A or B high	A or B	2.8	6.2	10.1	2.8	11	ns
t_{PHL}			5.5	8.7	12.1	5.5	13.3	
t_{PLH}	SBA or SAB† with A or B low	A or B	4.9	7.8	11	4.9	12.2	ns
t_{PHL}			3.9	7.5	11.6	3.9	12.6	
t_{PZH}	$\overline{G}$BA	A	3.3	7.2	11.4	3.3	12.6	ns
t_{PZL}			4.1	7.8	12.6	4.1	13.8	
t_{PHZ}	$\overline{G}$BA	A	5.2	7.2	9.3	5.2	9.9	ns
t_{PLZ}			4.8	6.7	8.6	4.8	9.3	
t_{PZH}	GAB	B	5.1	9.1	13.4	5.1	15.2	ns
t_{PZL}			5.8	9.7	14.2	5.8	16.1	
t_{PHZ}	GAB	B	3.4	6.8	9.7	3.4	10.3	ns
t_{PLZ}			3.1	6	8.8	3.1	9.3	

† These parameters are measured with the internal output state of the storage register opposite that of the bus input.

operating characteristics, V_{CC} = 5 V, T_A = 25°C


PARAMETER			TEST CONDITIONS		TYP	UNIT
C_{pd}	Power dissipation capacitance per transceiver	Outputs enabled	C_L = 50 pF,	f = 1 MHz	59	pF
		Outputs disabled			14	

PARAMETER MEASUREMENT INFORMATION

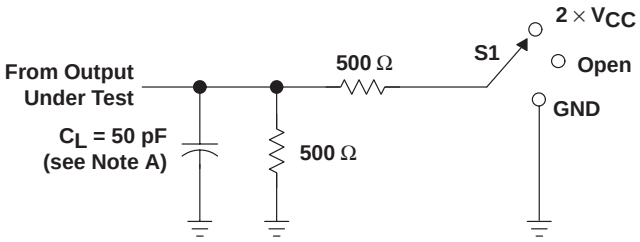


TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	2 × V_{CC}
t_{PHZ}/t_{PZH}	GND


LOAD CIRCUIT

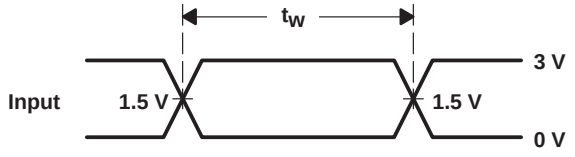


VOLTAGE WAVEFORMS

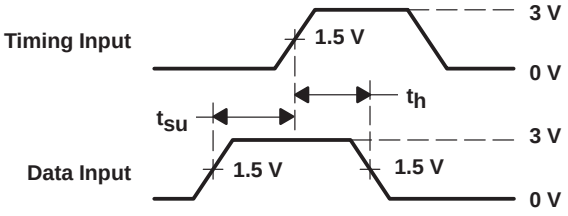

VOLTAGE WAVEFORMS

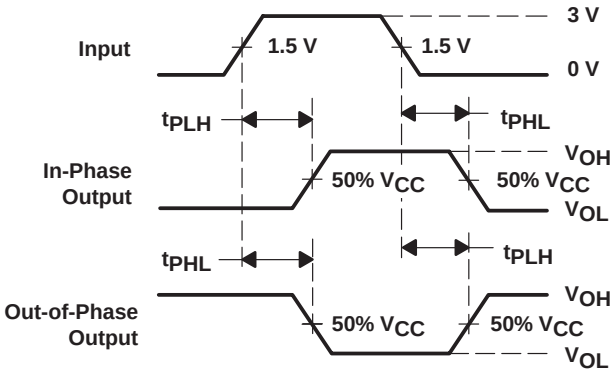

VOLTAGE WAVEFORMS

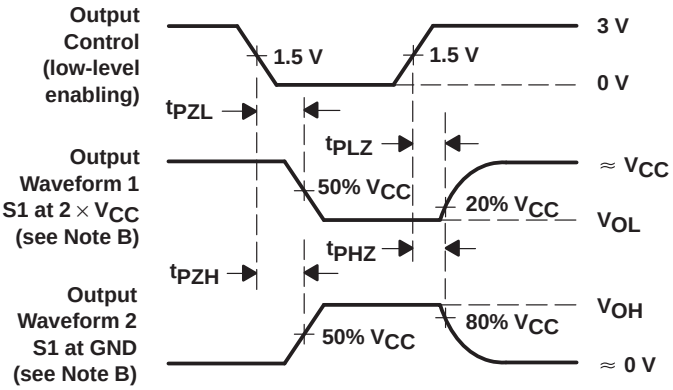

VOLTAGE WAVEFORMS

NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 1 MHz, Z_O = 50 Ω, t_r = 3 ns, t_f = 3 ns.
D. The outputs are measured one at a time with one input transition per measurement.

Figure 2. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated