
Multilayer Chip Baluns For AGSM/Tx & Rx

Conformity to RoHS Directive

HHM Series HHM1523B3


SHAPES AND DIMENSIONS

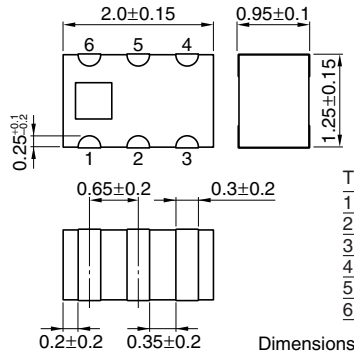


Terminal functions	
1	Unbalanced port
2	GND or DC feed+ RF GND
3	Balanced port
4	Balanced port
5	GND
6	N.C.

Dimensions in mm

CIRCUIT DIAGRAM

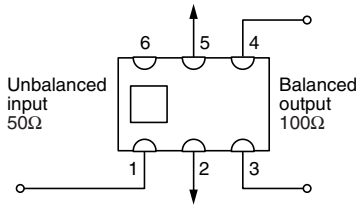

RECOMMENDED PC BOARD PATTERNS



Dimensions in mm

ELECTRICAL CHARACTERISTICS

Unbalanced impedance		50Ω
Balanced impedance		100Ω
Frequency range		824 to 894MHz
Unbalanced port return loss		10dB min.
Phase imbalance at balanced port		180±10deg.
Amplitude imbalance at balanced port		0±1.0dB
Insertion loss		1.2dB max.
Temperature range	Operating	–40 to +85°C
	Storage	–40 to +85°C
Packaging style and quantities		2000pieces/reel


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 100Ω


RETURN LOSS

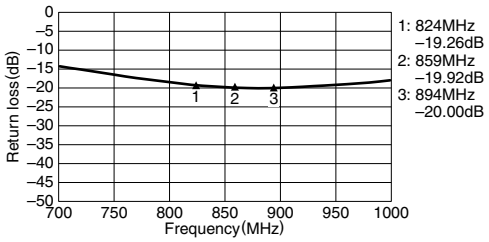


AMPLITUDE BALANCE

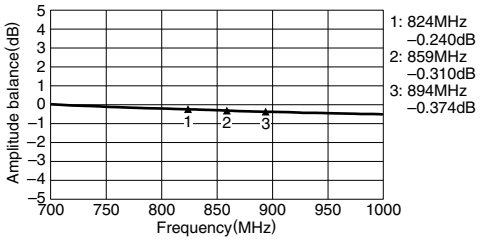

INSERTION LOSS

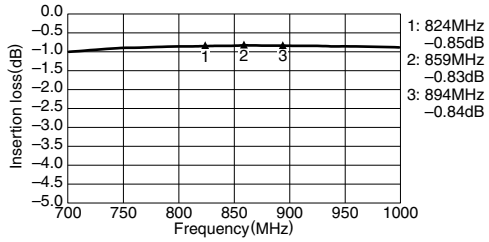

PHASE BALANCE

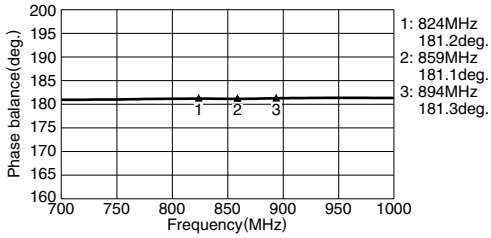

• All specifications are subject to change without notice.