GHz TECHNOLOGY
RF·MICROWAVE SILICON POWER TRANSISTORS


UMIL 100A

100 Watts, 28 Volts, Class AB
Defcom 225 - 400 MHz

GENERAL DESCRIPTION

The UMIL100A is a double input matched COMMON EMITTER broadband transistor specifically intended for use in the 225-400 MHz frequency band. It may be operated in Class AB or C. Gold metallization and silicon diffused resistors ensure ruggedness and high reliability.

CASE OUTLINE
55JU, Style 2

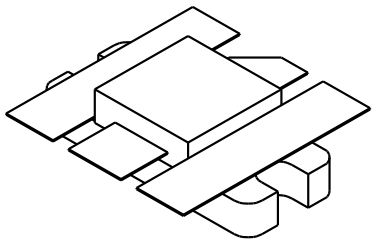

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25ºC 270 Watts

Maximum Voltage and Current

BVces	Collector to Emiter Voltage	65 Volts
BVebo	Emitter to Base Voltage	4.0 Volts
Ic	Collector Current	20 A

Maximum Temperatures

Storage Temperature	- 65 to +150ºC
Operating Junction Temperature	+150ºC

ELECTRICAL CHARACTERISTICS @ 25 ºC

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Output	F = 400 MHz	100			Watts
Pin	Power Input	Vcc = 28 Volts			19	Watts
Pg	Power Gain		7.2	8.5		dB
ηc	Efficiency			55		%
VSWR	Load Mismatch Tolerance				5:1	

BVebo	Emitter to Base Breakdown	Ie = 5 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 100 mA	60			Volts
BVceo	Collector to Emitter Breakdown	Ie = 50 mA	31			Volts
BVcbo	Collector to Base Breakdown	Ic =100 mA	60			Volts
Icbo	Collector to Base Current	Vc = 30 Volts			50	mA
Cob	Output Capacitance	Vcb = 28 V, F = 1 MHz		120		pF
h_{FE}	DC - Current Gain	Vce = 5 V, Ic = 1 A	10			
θjc	Thermal Resistance				0.7	ºC/W

Issue August 1996


GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120

GHz TECHNOLOGY
RF·MICROWAVE SILICON POWER TRANSISTORS


UMIL100A

POWER GAIN VS FREQUENCY

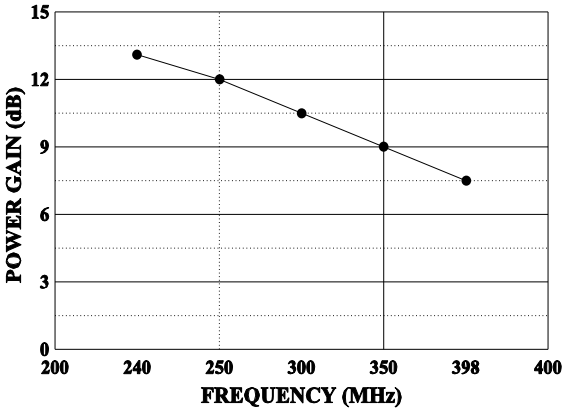


POWER OUTPUT vs POWER INPUT

Vcc= 28V f=400MHz

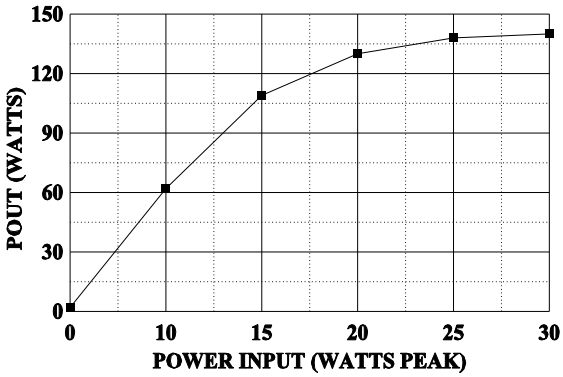

DC SAFE OPERATING AREA

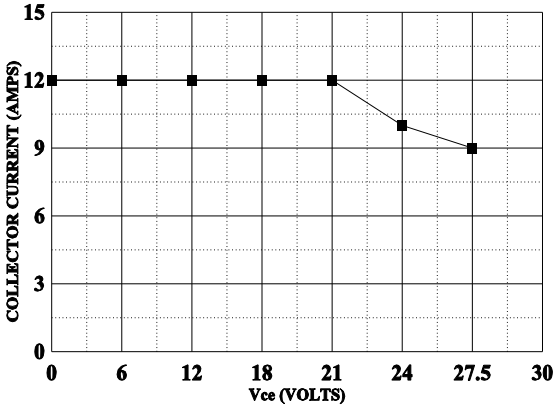

August 1996