Passive module - FLKM-KS40/AO16/YCS - 2314260

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

16-channel analog module with a screw connection and two 40-pos. system connections. Suitable for the Yokogawa AA1543 card.

Product Features

- For AAI 543 analog module

Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	275.6 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Width	108 mm
Height	126 mm
Depth	68 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	24 V DC ±10 %
Max. current carrying capacity per branch	100 mA
Number of positions	40
Status display	No

Passive module - FLKM-KS40/AO16/YCS - 2314260

Technical data

General

Test voltage	500 V (50 Hz, 1 min.)
Mounting position	any
Assembly instructions	In rows with zero spacing
Standards/regulations	DIN EN 50178
Standards/specifications	DIN EN 50178
Pollution degree	2
Surge voltage category	III

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm²
Conductor cross section solid max.	4 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	2.5 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Connection data for connection 2

Connection name	Control system level
Number of connections	2
Connection method	Yokogawa KS-compatible
Number of positions	40

Supported controller

Controller	YOKOGAWA CENTUM CS3000R3
- suitable I/O card	AAI543
Controller	YOKOGAWA STARDOM
- suitable I/O card	NFAI543

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313

Passive module - FLKM-KS40/AO16/YCS - 2314260

Classifications

eCl@ss

eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Dimensioned drawing

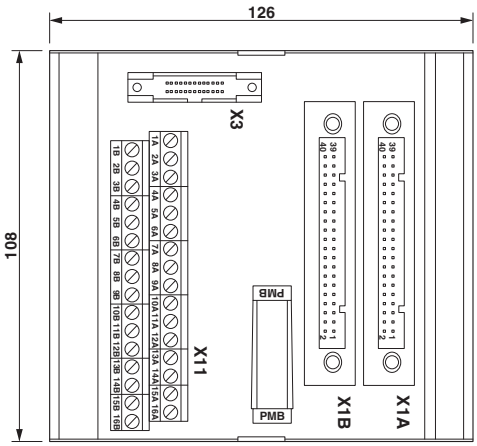

Passive module - FLKM-KS40/AO16/YCS - 2314260

Circuit diagram

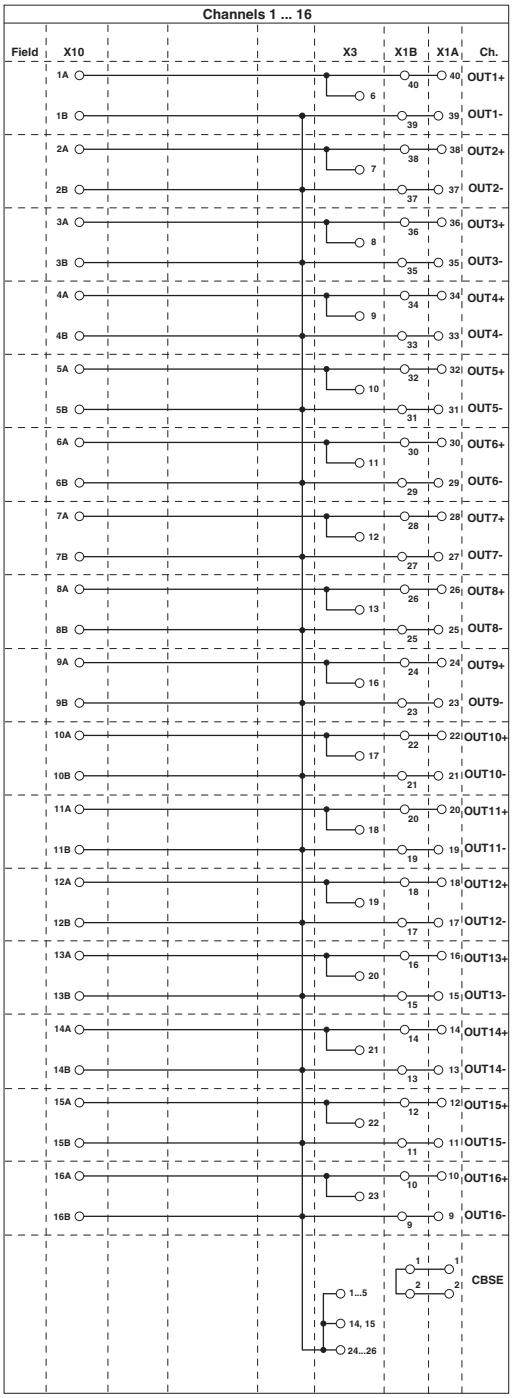

Phoenix Contact 2014 © - all rights reserved
http://www.phoenixcontact.com