
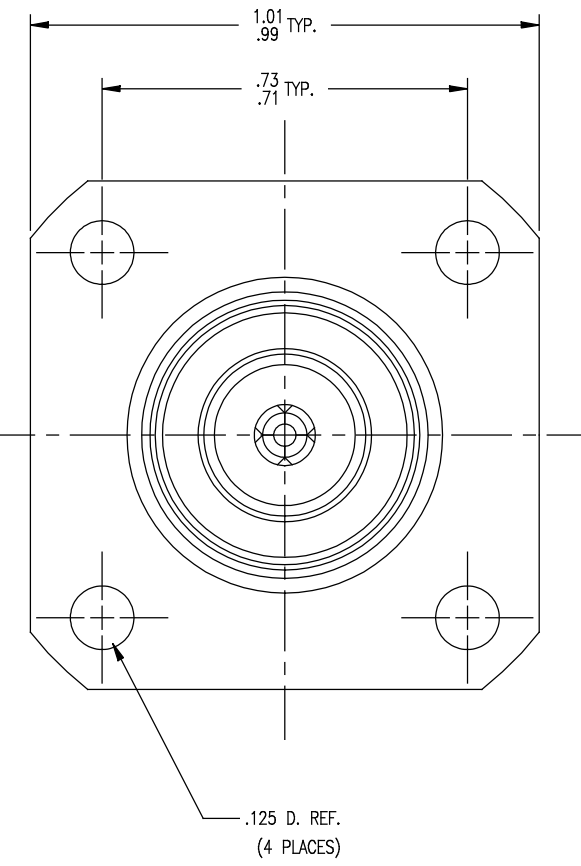


GSD

KN-19-118

REVISIONS

ISSUE	CHANGES
0	ER 36814 CCT 02/09/96
1	CN 37799 E TML 03/09/99

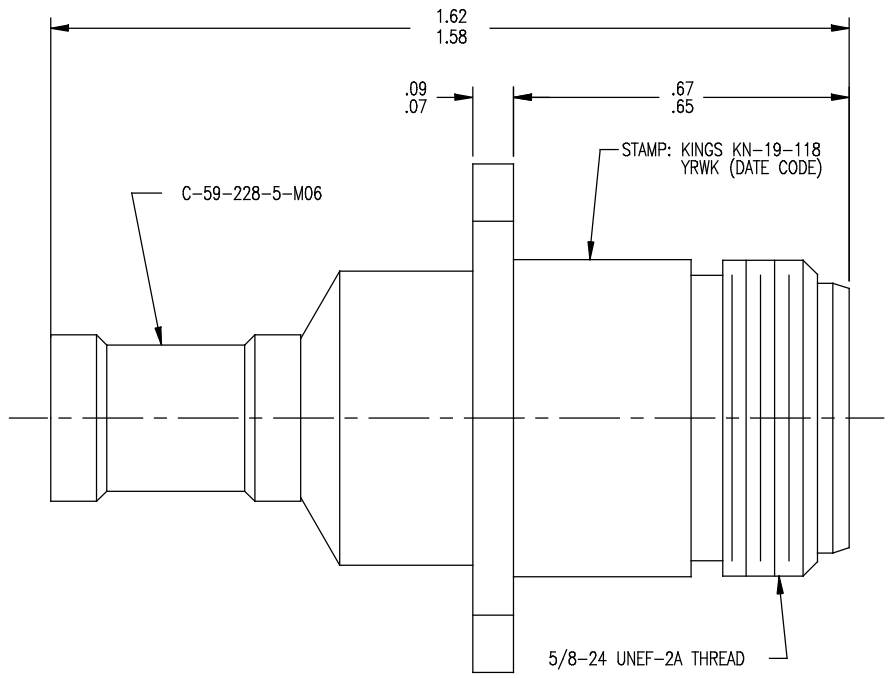

NOTES:

- FOR USE WITH RG-59/B, 62/B & 210/U CABLES.
- FOR CABLING INSTRUCTIONS SEE CP-5402.
- FOR CRIMPING USE DIE KTH-2062.
- INTERFACE PER MIL-STD-348, FIG. 304-2.
- FOR USE WITH .22 MAX PANEL.
- CENTER CONTACT (1-534-101MA9) SUPPLIED UNASSEMBLED.
- MARK PACKAGE: KINGS KN-19-118 YRWK (DATE CODE)
- MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz

GNB3074

SCALE 4:1

APPROX SURFACE AREA

WAS: E-19235

USED ON

REF: BOEING

JACK, PANEL, N

DRAWN CCT DATE 02/09/96

DESIGN CCT DATE 02/09/96

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

GSD

KN-19-118