

AVO240 Series

240 Watts

Data Sheet


Total Power: 240 Watts
Input Voltage: 41 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Output voltage 12V
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Pre-bias start-up capability
- Open-frame structure

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

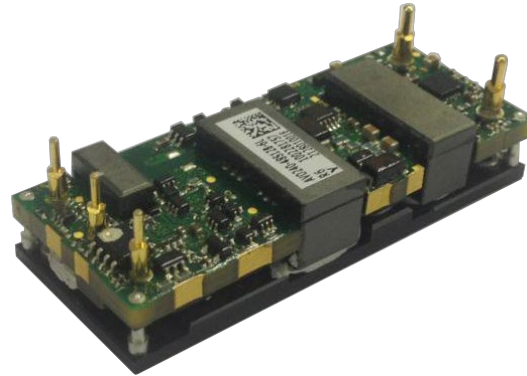

Electrical Specifications

Input	
Input range	41 - 75 Vdc
Efficiency ²	94% @ 12 Vo
Output	
Voltage tolerance	11.6 - 12.2 V
Line regulation	± 0.3%
Load regulation	± 0.5%
Noise/ripple	70 mV
Overvoltage protection	Auto-restart
Overtemperature protection	
Switching frequency	150 kHz
Temperature co-efficient	± 0.02/°C
Isolation	
I/O isolation	1500 Vdc min.

Environmental Specifications

Operating ambient temperature	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS Compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVO240-48S12-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12B-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12P-6L	41 - 75 Vin	12 V @ 20 A	240 W
AVO240-48S12PB-6L	41 - 75 Vin	12 V @ 20 A	240 W

Standard version is negative enable

"-6" = 3.8 mm pin length


"-4" = 4.8 mm pin length

"-P" = Positive enable

"-B" = baseplate

Mechanical Drawings

AVO240-48S12-6L

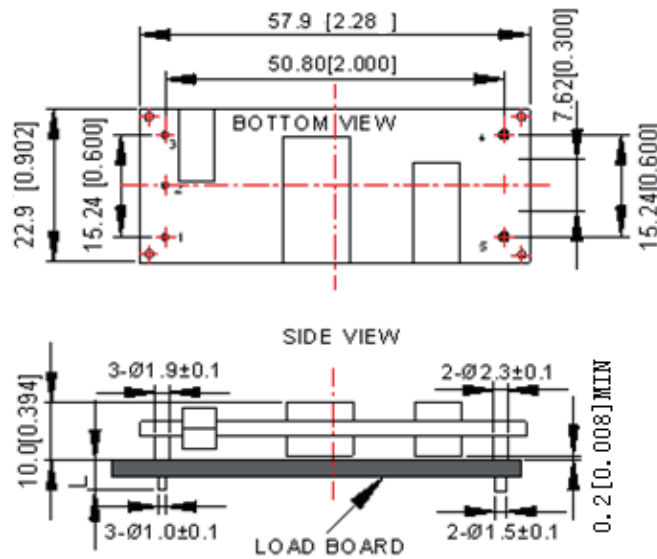


UNIT: mm[inch] BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Mechanical Drawings

AVO240-48S12B-6L

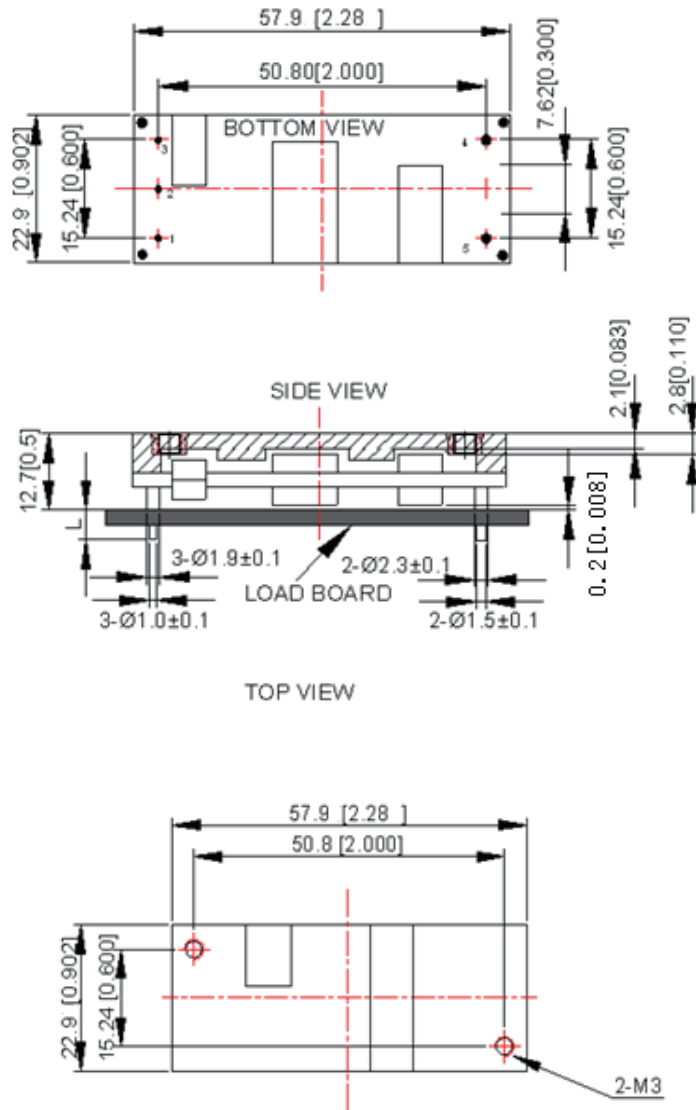

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin length option

Device code suffix	L
-4	4.8 mm ±0.2 mm
-6	3.8 mm ±0.2 mm
-8	2.8 mm ±0.2 mm
None	5.8 mm ±0.2 mm

Pin Designations

Pin No.	Name	Function
1	V_{in+}	Positive input voltage
2	Remote ON/OFF	Remote control
3	V_{in-}	Negative input voltage
4	V_{o-}	Negative output voltage
5	V_{o+}	Positive output voltage

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com