

Standard Diodes, 60 A/80 A (ADD-A-PAK Generation 5 Power Modules)



ADD-A-PAK

PRODUCT SUMMARY	
$I_{F(AV)}$	60 A/80 A
Type	Modules - Diode, High Voltage


MECHANICAL DESCRIPTION

The Generation 5 of ADD-A-PAK module combine the excellent thermal performance obtained by the usage of direct bonded copper substrate with superior mechanical ruggedness, thanks to the insertion of a solid copper baseplate at the bottom side of the device. The Cu baseplate allow an easier mounting on the majority of heatsink with increased tolerance of surface roughness and improve thermal spread.

The Generation 5 of AAP module is manufactured without hard mold, eliminating any possible direct stress on the leads.

The electrical terminals are secured against axial pull-out: they are fixed to the module housing via a click-stop feature already tested and proved as reliable on other Vishay HPP modules.

FEATURES

- High voltage
- Industrial standard package
- Thick copper baseplate
- UL E78996 approved 
- 3500 V_{RMS} isolating voltage
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level



RoHS
COMPLIANT

BENEFITS

- Up to 1600 V
- Full compatible TO-240AA
- High surge capability
- Easy mounting on heatsink
- Al_2O_3 DBC insulator
- Heatsink grounded

ELECTRICAL DESCRIPTION

These modules are intended for general purpose high voltage applications such as high voltage regulated power supplies, lighting circuits, temperature and motor speed control circuits, UPS and battery charger.

MAJOR RATINGS AND CHARACTERISTICS				
SYMBOL	CHARACTERISTICS	VSK.56	VSK.71	UNITS
$I_{F(AV)}$	100 °C	60	80	A
$I_{F(RMS)}$		94	126	
I_{FSM}	50 Hz	1600	1790	
	60 Hz	1680	1870	
I^2t	50 Hz	12.89	15.90	kA ² s
	60 Hz	11.76	14.53	
$I^2\sqrt{t}$		128.9	159	kA ² √s
V_{RRM}	Range	400 to 1600		V
T_J		- 40 to 150		°C
T_{Stg}				

VSK.56..PbF, VSK.71..PbF Series



Vishay Semiconductors

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V _{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V _{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I _{RRM} MAXIMUM AT 150 °C mA
VSK.56 VSK.71	04	400	500	10
	06	600	700	
	08	800	900	
	10	1000	1100	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

FORWARD CONDUCTION						
PARAMETER	SYMBOL	TEST CONDITIONS		VSK.56	VSK.71	UNITS
Maximum average forward current at case temperature	I _{F(AV)}	180° conduction, half sine wave		60	80	A
				100	100	°C
Maximum RMS forward current	I _{F(RMS)}	DC at 92 °C case temperature		94	126	A
Maximum peak, one-cycle forward, non-repetitive surge current	I _{FSM}	t = 10 ms	No voltage reappplied	1600	1790	
		t = 8.3 ms		1680	1870	
		t = 10 ms	100 % V _{RRM} reappplied	1350	1500	
		t = 8.3 ms		1420	1570	
Maximum I ² t for fusing	I ² t	t = 10 ms	No voltage reappplied	12.89	15.90	kA ² s
		t = 8.3 ms		11.76	14.53	
		t = 10 ms	100 % V _{RRM} reappplied	9.12	11.25	
		t = 8.3 ms		8.32	10.23	
Maximum I ² √t for fusing	I ² √t	t = 0.1 ms to 10 ms, no voltage reappplied		128.9	159.0	kA ² √s
Low level value of threshold voltage	V _{F(TO)1}	(16.7 % × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J maximum		0.96	0.83	V
High level value of threshold voltage	V _{F(TO)2}	(I > π × I _{F(AV)}), T _J = T _J maximum		1.03	0.92	
Low level value of forward slope resistance	r _{f1}	(16.7 % × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J maximum		2.81	2.68	mΩ
High level value of forward slope resistance	r _{f2}	(I > π × I _{F(AV)}), T _J = T _J maximum		2.48	2.40	
Maximum forward voltage drop	V _{FM}	I _{FM} = π × I _{F(AV)} , T _J = 25 °C, t _p = 400 μs square wave		1.51	1.50	V

BLOCKING						
PARAMETER	SYMBOL	TEST CONDITIONS		VSK.56	VSK.71	UNITS
Maximum peak reverse leakage current	I _{RRM}	T _J = 150 °C		10		mA
RMS insulation voltage	V _{INS}	50 Hz, circuit to base, all terminals shorted		3500 (1 s)		V



VSK.56..PbF, VSK.71..PbF Series

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

Vishay Semiconductors

THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES		UNITS
			VSK.56	VSK.71	
Junction and storage temperature range	T_J, T_{Stg}		- 40 to 150		°C
Maximum thermal resistance, junction to case per junction	R_{thJC}	DC operation	0.5	0.4	K/W
Typical thermal resistance, case to heatsink	R_{thCS}	Mounting surface flat, smooth and greased	0.1		
Mounting torque $\pm 10\%$ to heatsink busbar		A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.	5	4	Nm
Approximate weight			110		g
			4		oz.
Case style		JEDEC	ADD-A-PAK (TO-240AA)		

ΔR CONDUCTION PER JUNCTION											
DEVICES	SINE HALF WAVE CONDUCTION					RECTANGULAR WAVE CONDUCTION					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
VSK.56	0.11	0.13	0.16	0.22	0.32	0.09	0.14	0.17	0.23	0.32	°C/W
VSK.71	0.06	0.08	0.11	0.14	0.21	0.06	0.09	0.11	0.15	0.21	

Note

- Table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

VSK.56..PbF, VSK.71..PbF Series



Vishay Semiconductors

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

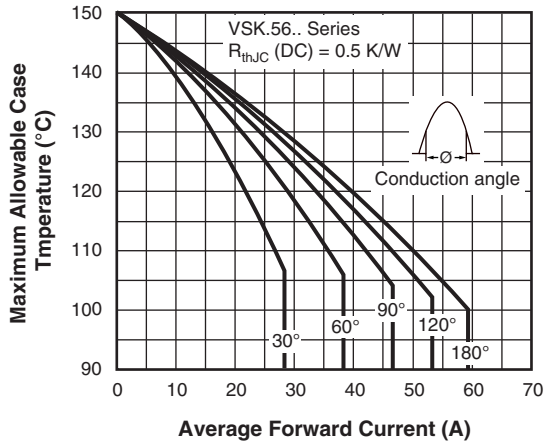


Fig. 1 - Current Ratings Characteristics

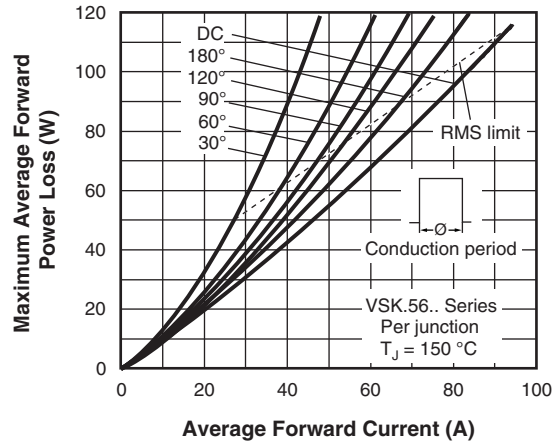


Fig. 4 - Forward Power Loss Characteristics

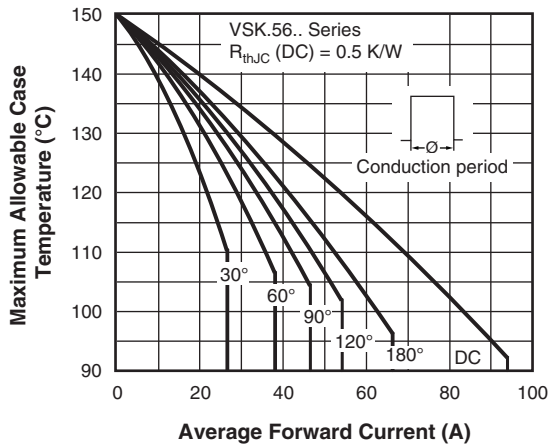


Fig. 2 - Current Ratings Characteristics

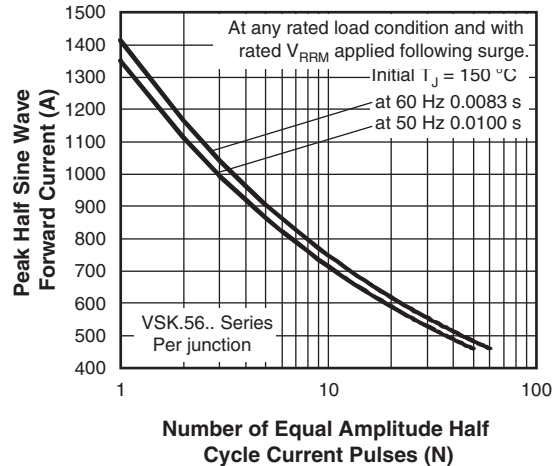


Fig. 5 - Maximum Non-Repetitive Surge Current

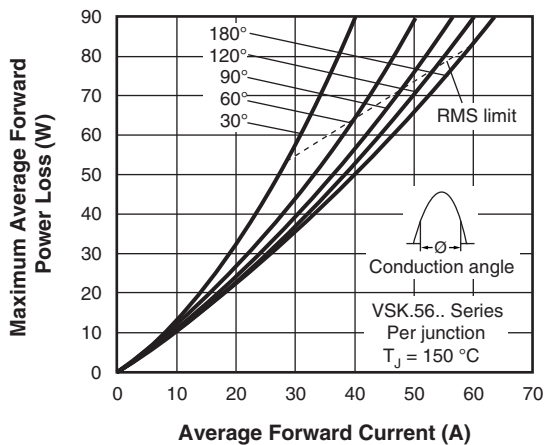


Fig. 3 - Forward Power Loss Characteristics

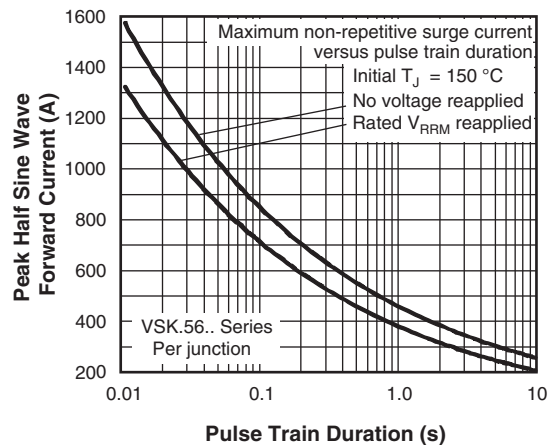


Fig. 6 - Maximum Non-Repetitive Surge Current



VSK.56..PbF, VSK.71..PbF Series

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

Vishay Semiconductors

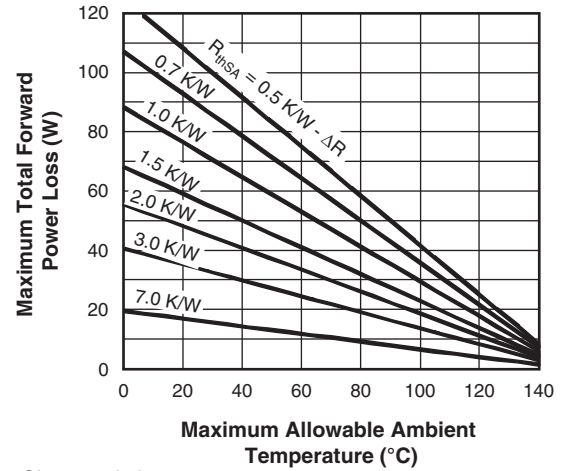
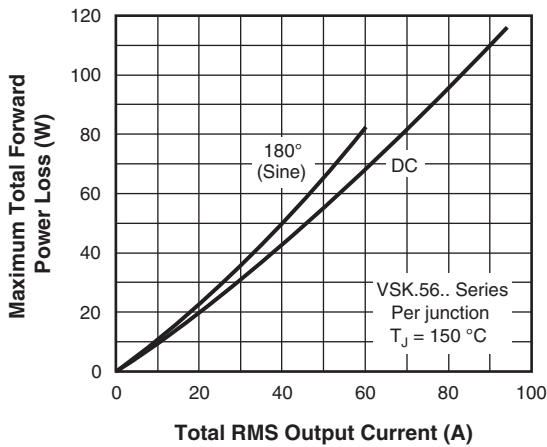


Fig. 7 - Forward Power Loss Characteristics

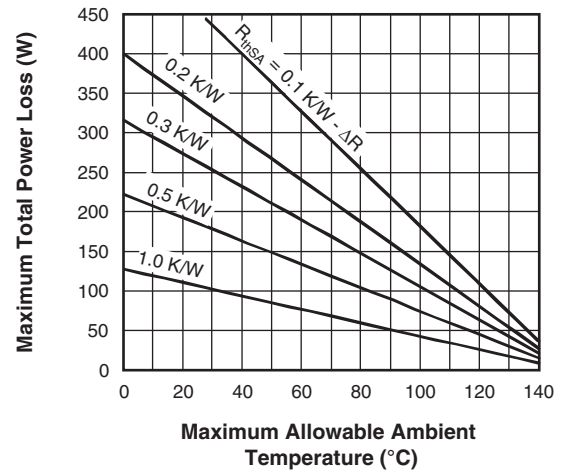
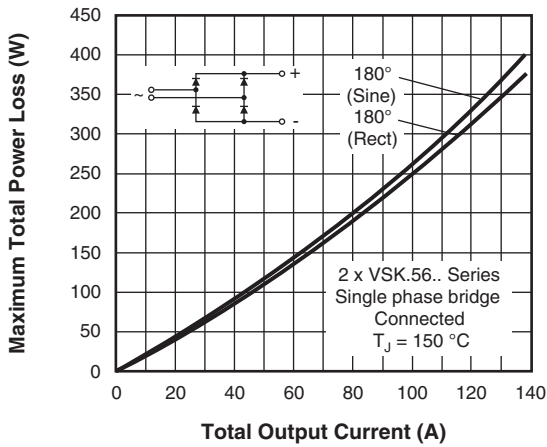


Fig. 8 - Forward Power Loss Characteristics


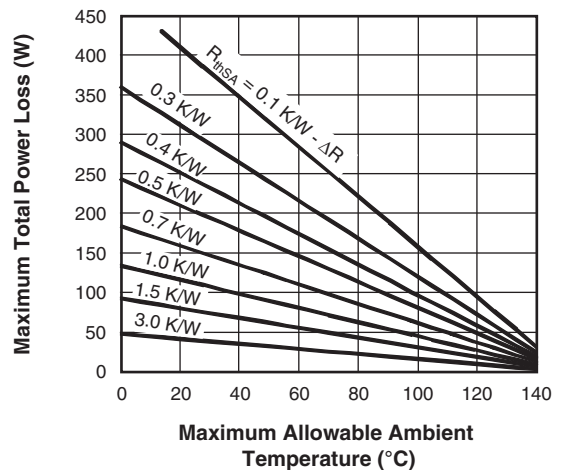


Fig. 9 - Forward Power Loss Characteristics

VSK.56..PbF, VSK.71..PbF Series

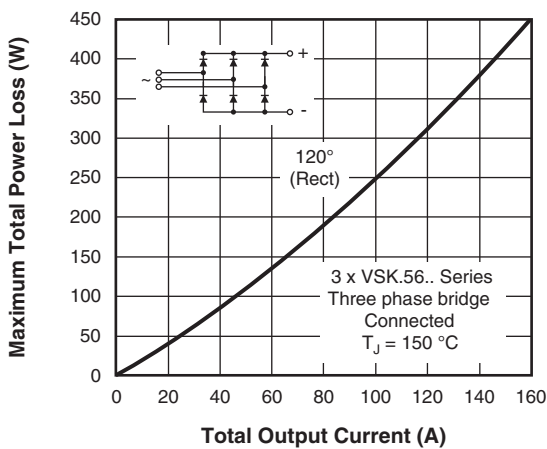

Vishay Semiconductors

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

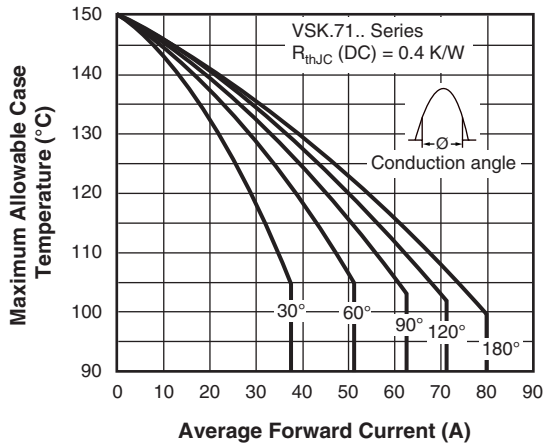


Fig. 10 - Current Ratings Characteristics

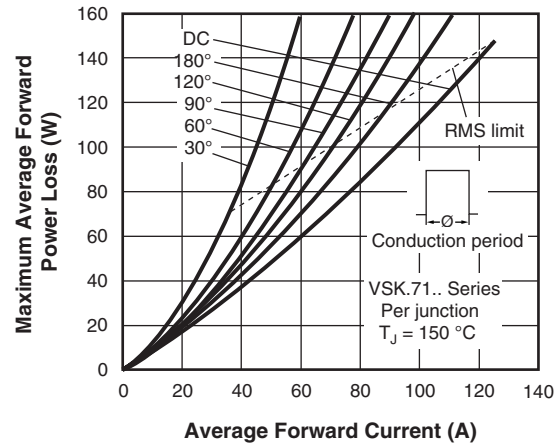


Fig. 13 - Forward Power Loss Characteristics

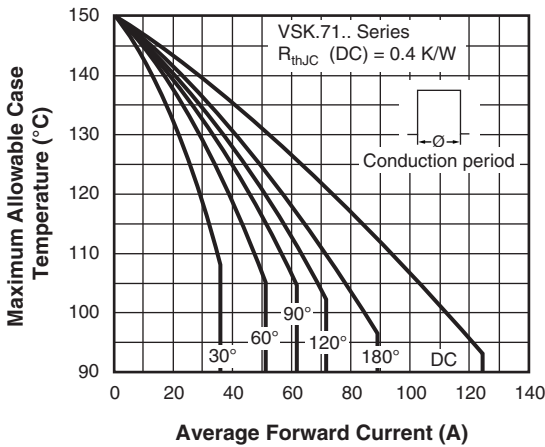


Fig. 11 - Current Ratings Characteristics

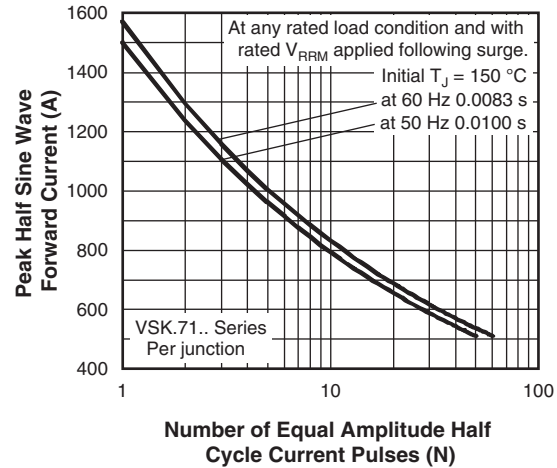


Fig. 14 - Maximum Non-Repetitive Surge Current

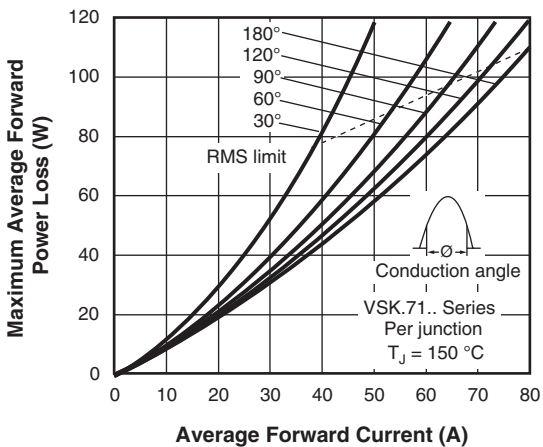


Fig. 12 - Forward Power Loss Characteristics

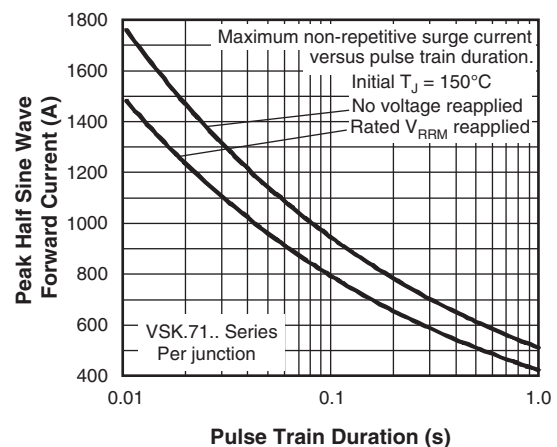


Fig. 15 - Maximum Non-Repetitive Surge Current



VSK.56..PbF, VSK.71..PbF Series

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

Vishay Semiconductors

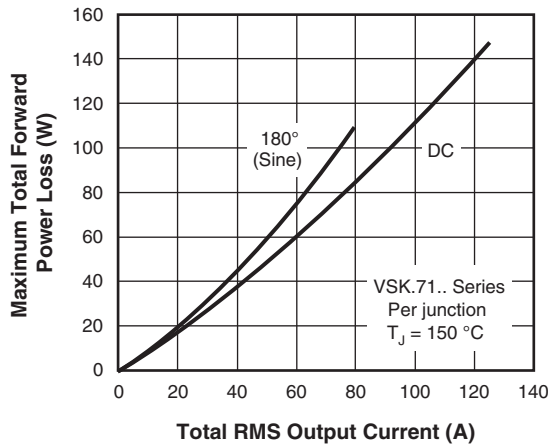


Fig. 16 - Forward Power Loss Characteristics

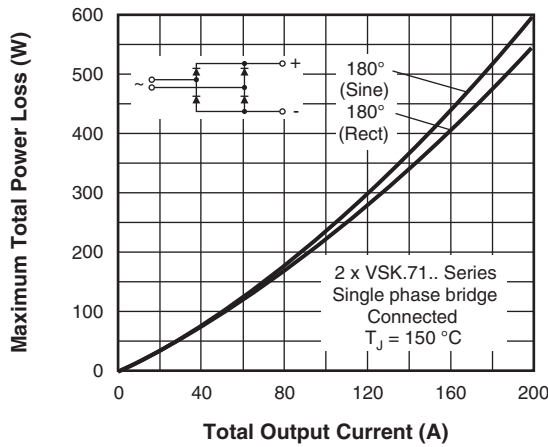
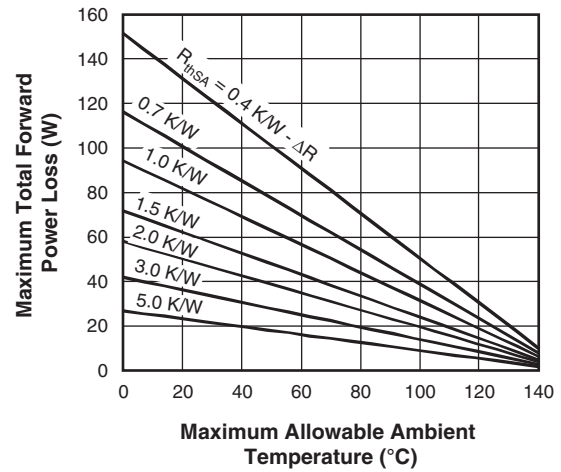


Fig. 17 - Forward Power Loss Characteristics



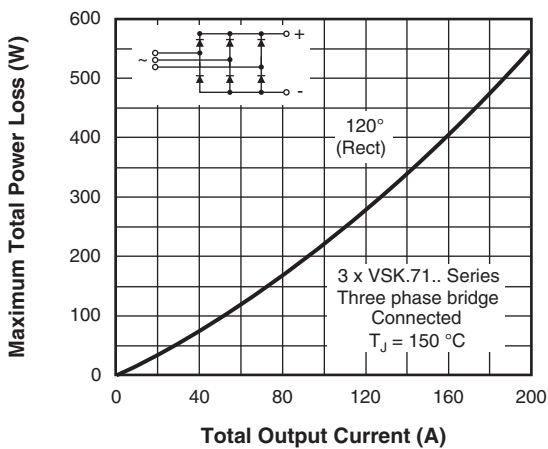


Fig. 18 - Forward Power Loss Characteristics

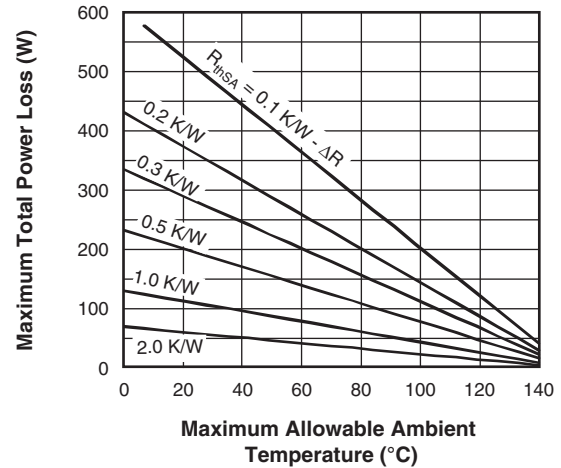

VSK.56..PbF, VSK.71..PbF Series

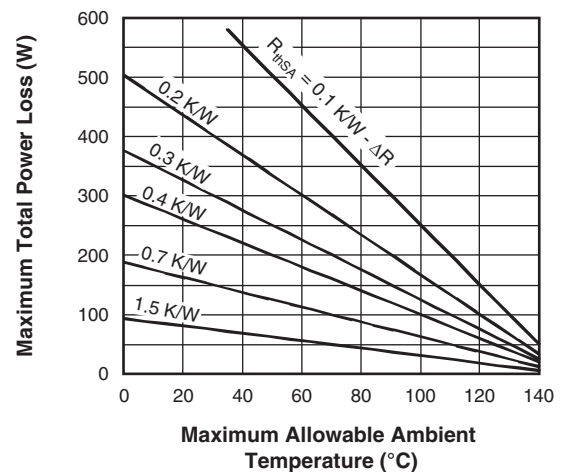

Vishay Semiconductors

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)

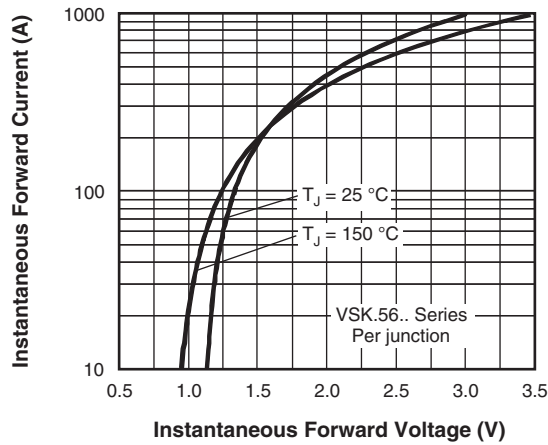


Fig. 19 - Forward Voltage Drop Characteristics

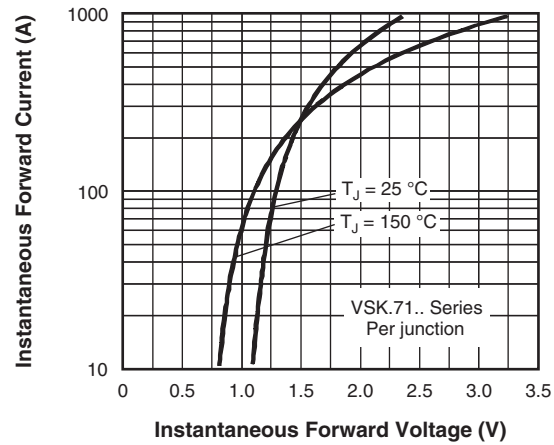


Fig. 20 - Forward Voltage Drop Characteristics

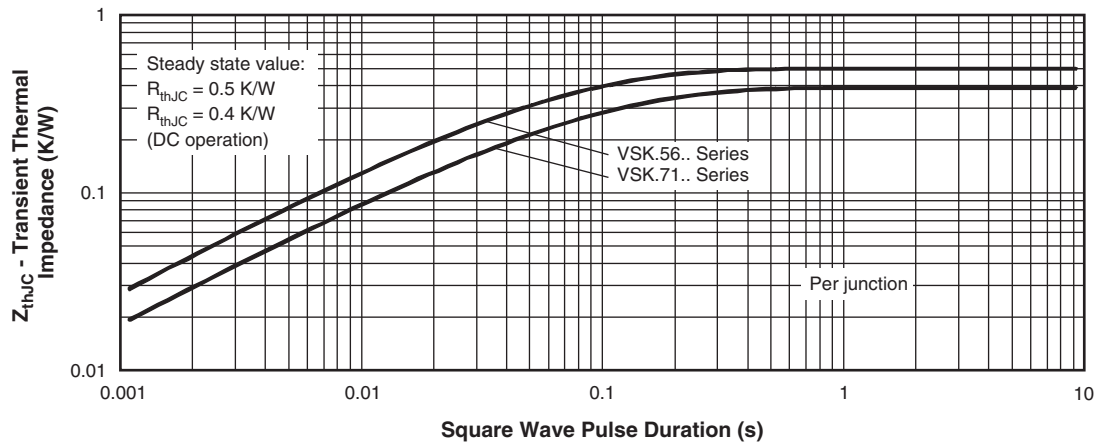


Fig. 21 - Thermal Impedance Z_{thJC} Characteristics

ORDERING INFORMATION TABLE

Device code	VSK	D	71	/	16	P
	①	②	③		④	⑤

- ① - Module type
- ② - Circuit configuration (see Circuit Configuration table)
- ③ - Current code
- ④ - Voltage code (see Voltage Ratings table)
- ⑤ - P = Lead (Pb)-free

Note

- To order the optional hardware go to www.vishay.com/doc?95172



VSK.56..PbF, VSK.71..PbF Series

Standard Diodes, 60 A/80 A
(ADD-A-PAK Generation 5 Power Modules)


Vishay Semiconductors

CIRCUIT CONFIGURATION		
CIRCUIT DESCRIPTION	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Two diodes doubler circuit	D	<p>VSKD...</p>
Two diodes common cathodes	C	<p>VSKC...</p>
Two diodes common anodes	J	<p>VSKJ...</p>
Single diode	E	<p>VSKE...</p>

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95015

ADD-A-PAK Diode

DIMENSIONS in millimeters (inches)

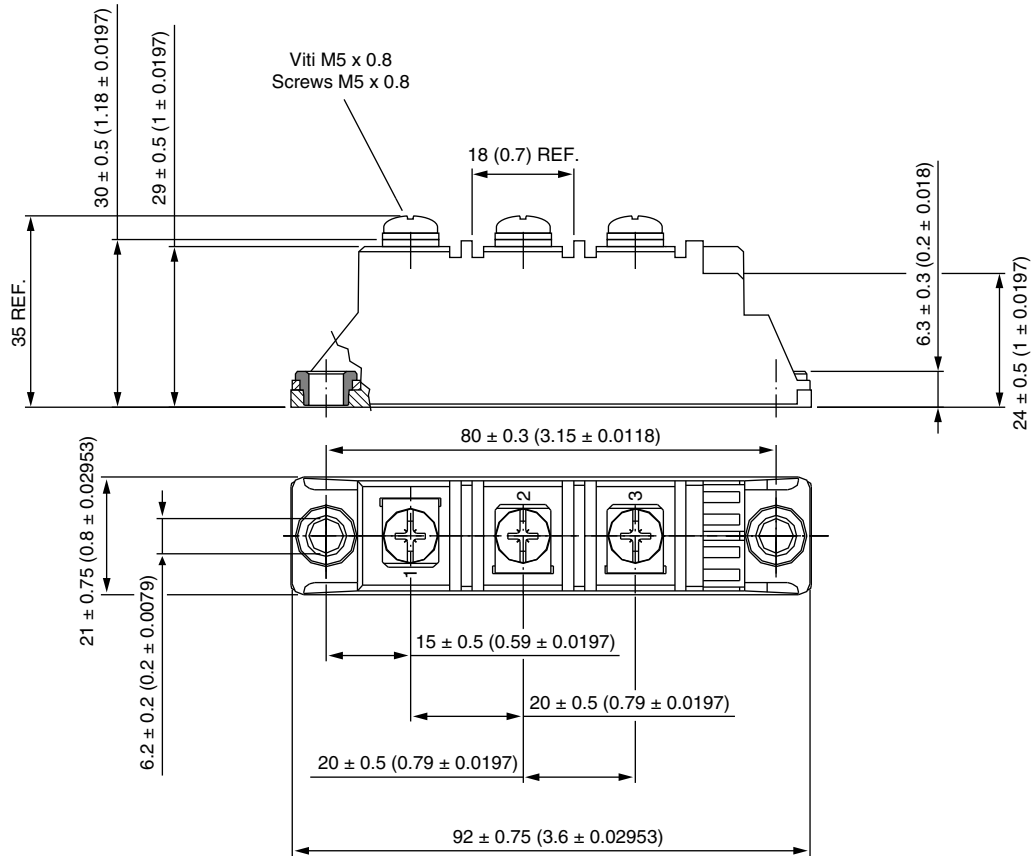



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.