
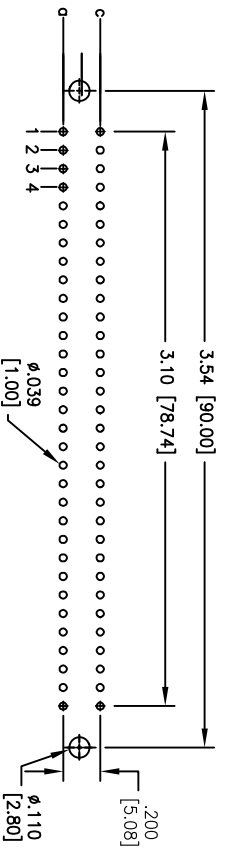

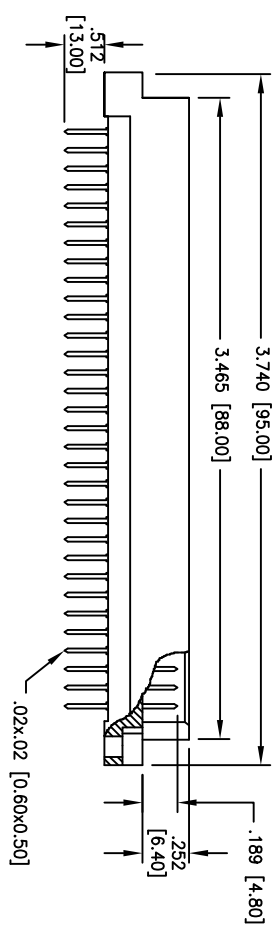


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/17/10	

6 5 4 3 2 1

APPROVED: _____
 DATE: _____ TITLE: _____

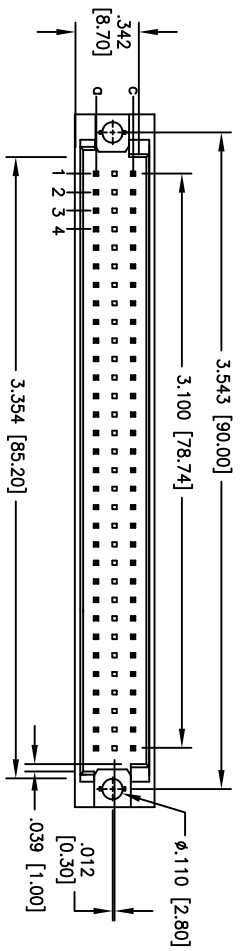

RECOMMENDED PCB LAYOUT

"X"	PLATING
C1	30 u" Gold
C2	15 u" Gold
C3	Gold Flash

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Contacts: Copper Alloy
 Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails.
 (See chart for thickness)
 Electrical: Current rating: 2 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +125°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 sec.

A

A

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 96P MALE STRAIGHT PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.XX ± .10	ØXX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	12/17/10
CHECKED AW	12/17/10
APPROVED	

SIZE	PART NO.	REV.
X	DIN-64-MS-L32-A2CX	-
REF:	S00038T	
SCALE:	NTS	
SHEET	1 OF 1	



6 5 4 3 2 1