
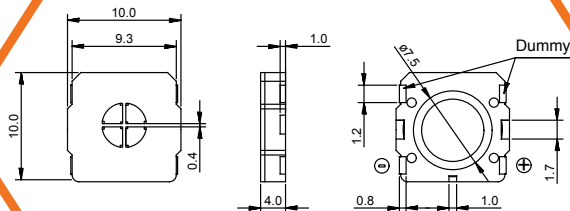


SoniCrest SPEAKER SOUND GENERATORS


HSS1010A



Dimensions

Unit : mm

Tolerance : $\pm 0.3\text{mm}$

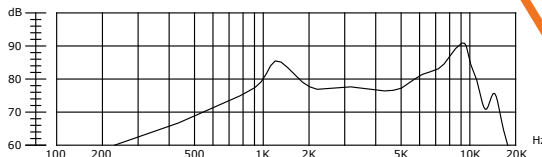

Frequency Response

Normalization to 1W Input Power
and 0.1m Measuring Distance

Specification (all data taken at 25°C unless otherwise specified)

Coil Impedance (Ω)	Rated Power (W)	Maximum Input Power (W)	Resonance Frequency (Hz)	*Frequency Range (Hz)	*Average Sound Pressure Level (dB)	Operating Temperature ($^{\circ}\text{C}$)	Storage Temperature ($^{\circ}\text{C}$)
$8 \pm 15\%$	1.0	1.2	$1200 \pm 20\%$	1200 ~ 20000	86 ± 3	-30 ~ +85	-40 ~ +105

HSS1010A-8

The specification are only for 8 Ω version. Specification for other impedance is available upon request.

*Value normalized to 1W input power and 0.1m measuring distance.