



NEW!

Air Core Inductors

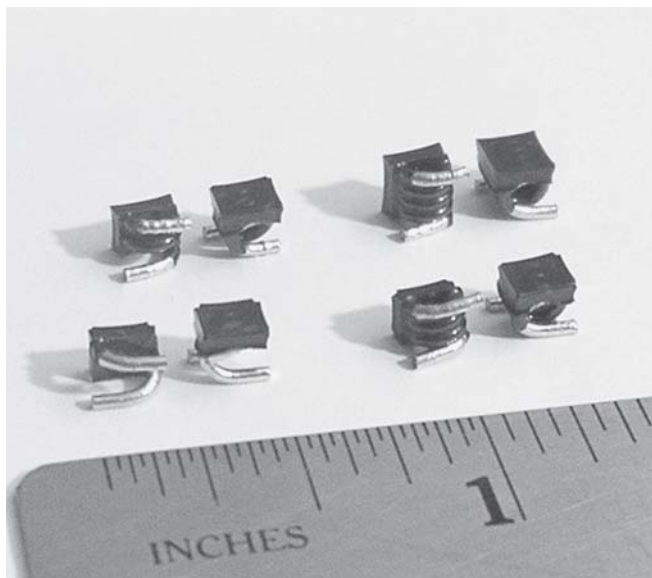

These parts have the lowest DCR and highest current ratings of our air-core inductors.

Request free evaluation samples by contacting Coilcraft or visiting www.coilcraft.com.

Part number ¹	Inductance ² ±5% (nH)	Q ² typ	SRF typ ³ (GHz)	DCR max ⁴ (mOhm)	I _{rms} ⁵ (A)	Wt (mg)
GA3092-AL_	3.7	120	17.5	2.0	7.0	150
GA3093-AL_	6.6	107	5.8	2.0	7.0	220
GA3094-AL_	12.0	105	2.4	2.0	7.0	280
GA3095-AL_	17.5	115	2.2	2.0	7.0	390

1. When ordering, please specify **packaging** code:

GA3095-AL **C**

- Packaging:** **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).
B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
D = 13" machine-ready reel. EIA-481 embossed plastic tape (1000 parts per full reel). Factory order only, not stocked.

2. L and Q measured at 150 MHz, 0.1 V_{rms}, 0 A using an Agilent/HP 4291A impedance analyzer with an Agilent/HP 16193A test fixture.
 3. SRF measured using an Agilent/HP 8722ES network analyzer and a Coilcraft SMD-D test fixture.
 4. DCR measured using a micro-ohmmeter.
 5. Current that causes a 15°C temperature rise from 25°C ambient.
 6. Electrical specifications at 25°C.
 Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Terminations RoHS compliant tin-silver over copper

Ambient temperature -40°C to +125°C with I_{rms} current, +125°C to +140°C with derated current

Storage temperature Component: -40°C to +140°C.
 Packaging: -40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +5 to +70 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Mean Time Between Failures (MTBF) 1 billion hours

Packaging 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.35 mm thick, 12 mm pocket spacing, 4.9 mm pocket depth

PCB washing Only pure water or alcohol recommended

Coilcraft®

Specifications subject to change without notice.
 Please check our website for latest information.

Document 625-1 Revised 03/06/09


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469
 E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!

Air Core Inductors


L vs Frequency

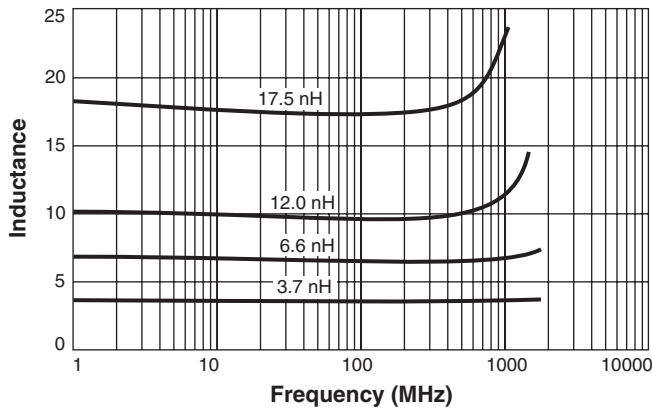

Q vs Frequency

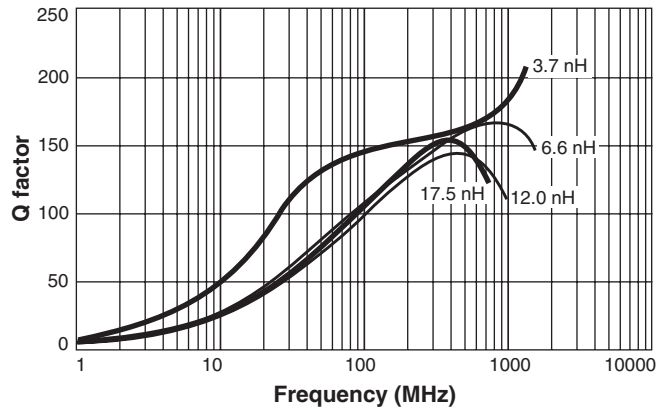

Irms Derating

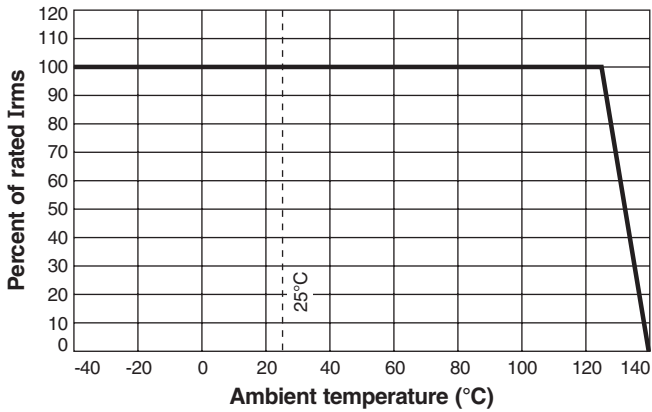


GA3092-AL














GA3093-AL



GA3094-AL



GA3095-AL



Dimensions are in inches/mm

Recommended Land Patterns

Soldered lead length

Coilcraft[®]

Specifications subject to change without notice. Please check our website for latest information.

Document 625-2 Revised 03/06/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com