

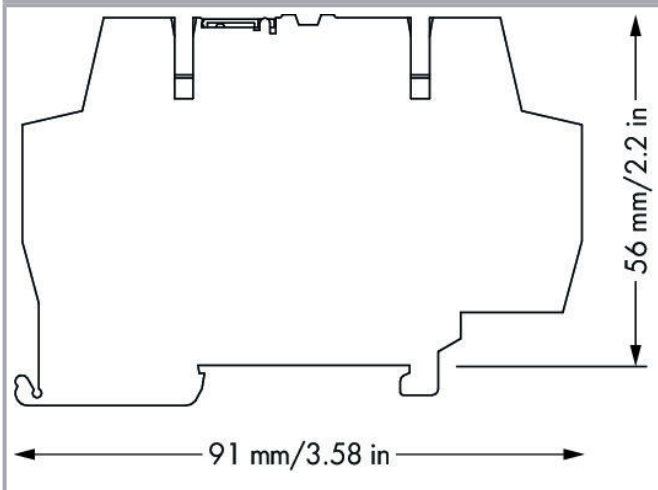


**Data sheet | Item number: 859-734**

Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 24 ... 260 VAC; Limiting continuous current: 0.5 A; 2-wire connection; zero-cross switching; Red status indicator; Module width: 6 mm; light gray

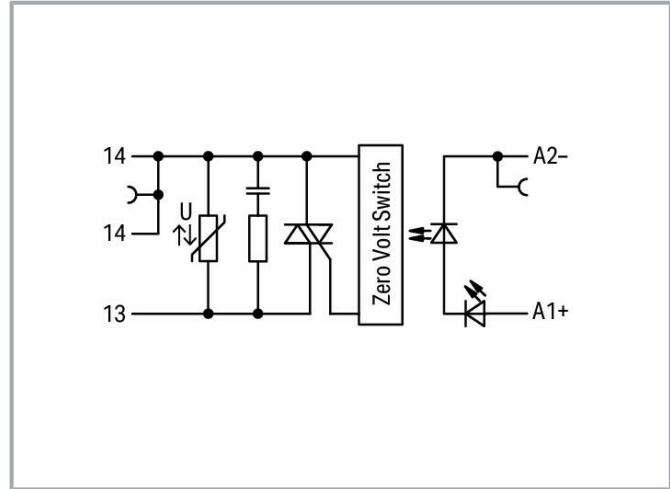

[www.wago.com/859-734](http://www.wago.com/859-734)

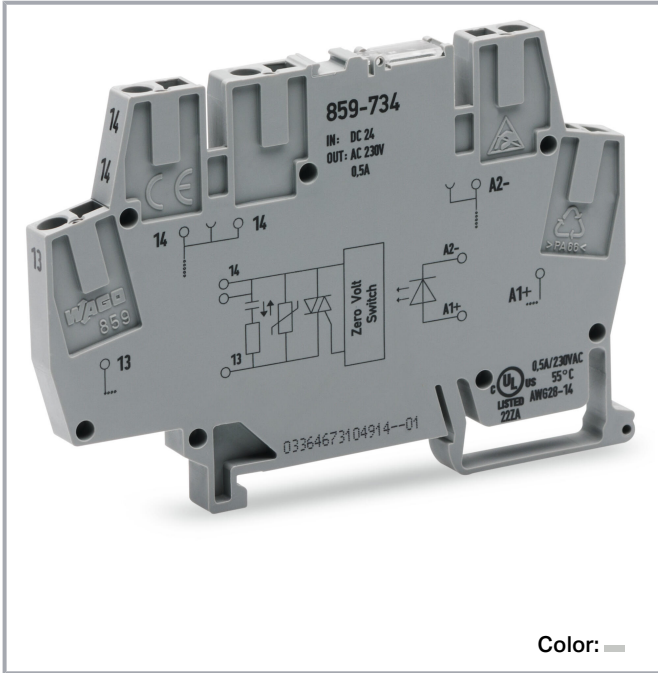

**Data  
Notes**

Note

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Optocouplers and solid state relays are designed for use in signal processing networks, which are not supplied by the low-voltage power supply networks.

## Technical data

### Control circuit

Nominal input voltage $U_N$	DC 24 V
Input voltage range (low level)	DC 0 ... 5 V
Input voltage range (high level)	DC 19 ... 28.8 V
Nominal input current at $U_N$	6 mA

### Load circuit

Circuit type	2-wire connection Zero-voltage switching
Limiting continuous current	0.5 A
Peak output current	30 A
Output voltage range	AC 24 ... 260 V (50 ... 60 Hz)
Voltage drop at output (max.)	$\leq$ AC 1.2 V
Leakage current at rated voltage	$\leq$ 1 mA
Switching current (min.)	10 mA
Turn-on time	$\leq$ 10 ms
Turn-off time	$\leq$ 10 ms
Switching frequency	50 Hz / 60 Hz

### Signaling

Status indicator	Red LED
------------------	---------

### Safety and protection

Rated voltage	300 V
Circuit type	Mains circuits
Overvoltage category	III
Pollution degree	2
Dielectric strength, control/load circuit (AC, 1 min)	3.51 kVrms

Subject to changes. Please also observe the further product documentation!



Insulation type (control/load circuit)	Reinforced insulation (safe isolation)
Insulation type (between adjacent devices of the the same type)	Reinforced insulation (safe isolation)

### Connection data

Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inch

### Physical data

Width	6 mm / 0.236 inch
Height	91 mm / 3.583 inch
Depth from upper edge of DIN-rail	56 mm / 2.205 inch

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Color	light gray
Fire load	0.313 MJ
Weight	20.2 g

### Environmental requirements

Surrounding air temperature (operation at U <sub>N</sub> )	-25 ... 55 °C
Surrounding air temperature (storage)	-40 ... 70 °C
Processing temperature	-25 ... +50 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

### Standards and specifications

Standards/Specifications	EN 61010-2-201 EN 61000-6-2 EN 61000-6-3 UL 508
--------------------------	--

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)


Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Commercial data

Product Group	6 (Interface Electronics)
PU (SPU)	1 Stück
Packaging type	box
Country of origin	DE
GTIN	4055144130027
Customs tariff number	85365005000







## Approvals / Certificates

### UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL UL International Netherlands B.V. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

## Optional accessories

### Ferrule

Ferrule		
	<b>Item no.: 216-223</b> Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; red	<a href="http://www.wago.com/216-223">www.wago.com/216-223</a>
	<b>Item no.: 216-222</b> Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray	<a href="http://www.wago.com/216-222">www.wago.com/216-222</a>
	<b>Item no.: 216-221</b> Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; white	<a href="http://www.wago.com/216-221">www.wago.com/216-221</a>
	<b>Item no.: 216-224</b> Ferrule; Sleeve for 1.5 mm <sup>2</sup> / AWG 16; insulated; electro-tin plated; black	<a href="http://www.wago.com/216-224">www.wago.com/216-224</a>
	<b>Item no.: 216-321</b> Ferrule; Sleeve for 0.25 mm <sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow	<a href="http://www.wago.com/216-321">www.wago.com/216-321</a>
	<b>Item no.: 216-322</b> Ferrule; Sleeve for 0.34 mm <sup>2</sup> / 22 AWG; insulated; electro-tin plated; green	<a href="http://www.wago.com/216-322">www.wago.com/216-322</a>

### Jumpers

Jumper		
	<b>Item no.: 859-408</b> Jumper; for jumper slot; 8-way; insulated; light gray	<a href="http://www.wago.com/859-408">www.wago.com/859-408</a>

Subject to changes. Please also observe the further product documentation!



**Item no.: 859-404/000-005**  
Jumper; for jumper slot; 4-way; insulated; red

[www.wago.com/859-404/000-005](http://www.wago.com/859-404/000-005)



**Item no.: 859-404/000-006**  
Jumper; for jumper slot; 4-way; insulated; blue

[www.wago.com/859-404/000-006](http://www.wago.com/859-404/000-006)



**Item no.: 859-405/000-005**  
Jumper; for jumper slot; 5-way; insulated; red

[www.wago.com/859-405/000-005](http://www.wago.com/859-405/000-005)



**Item no.: 859-405/000-029**  
Jumper; for jumper slot; 5-way; insulated; yellow

[www.wago.com/859-405/000-029](http://www.wago.com/859-405/000-029)



**Item no.: 859-405**  
Jumper; for jumper slot; 5-way; insulated; light gray

[www.wago.com/859-405](http://www.wago.com/859-405)



**Item no.: 859-404/000-029**  
Jumper; for jumper slot; 4-way; insulated; yellow

[www.wago.com/859-404/000-029](http://www.wago.com/859-404/000-029)



**Item no.: 859-406**  
Jumper; for jumper slot; 6-way; insulated; light gray

[www.wago.com/859-406](http://www.wago.com/859-406)



**Item no.: 859-405/000-006**  
Jumper; for jumper slot; 5-way; insulated; blue

[www.wago.com/859-405/000-006](http://www.wago.com/859-405/000-006)



**Item no.: 859-406/000-005**  
Jumper; for jumper slot; 6-way; insulated; red

[www.wago.com/859-406/000-005](http://www.wago.com/859-406/000-005)



**Item no.: 859-409/000-029**  
Jumper; for jumper slot; 9-way; insulated; yellow

[www.wago.com/859-409/000-029](http://www.wago.com/859-409/000-029)



**Item no.: 859-410/000-005**  
Jumper; for jumper slot; 10-way; insulated; red

[www.wago.com/859-410/000-005](http://www.wago.com/859-410/000-005)



**Item no.: 859-410/000-029**  
Jumper; for jumper slot; 10-way; insulated; yellow















[www.wago.com/859-410/000-029](http://www.wago.com/859-410/000-029)
















**Item no.: 859-410**  
Jumper; for jumper slot; 10-way; insulated; light gray

[www.wago.com/859-410](http://www.wago.com/859-410)

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 859-410/000-006</b> Jumper; for jumper slot; 10-way; insulated; blue	<a href="http://www.wago.com/859-410/000-006">www.wago.com/859-410/000-006</a>
	<b>Item no.: 859-403/000-005</b> Jumper; for jumper slot; 3-way; insulated; red	<a href="http://www.wago.com/859-403/000-005">www.wago.com/859-403/000-005</a>
	<b>Item no.: 859-402/000-029</b> Jumper; for jumper slot; 2-way; insulated; yellow	<a href="http://www.wago.com/859-402/000-029">www.wago.com/859-402/000-029</a>
	<b>Item no.: 859-403/000-029</b> Jumper; for jumper slot; 3-way; insulated; yellow	<a href="http://www.wago.com/859-403/000-029">www.wago.com/859-403/000-029</a>
	<b>Item no.: 859-403/000-006</b> Jumper; for jumper slot; 3-way; insulated; blue	<a href="http://www.wago.com/859-403/000-006">www.wago.com/859-403/000-006</a>
	<b>Item no.: 859-408/000-005</b> Jumper; for jumper slot; 8-way; insulated; red	<a href="http://www.wago.com/859-408/000-005">www.wago.com/859-408/000-005</a>
	<b>Item no.: 859-408/000-029</b> Jumper; for jumper slot; 8-way; insulated; yellow	<a href="http://www.wago.com/859-408/000-029">www.wago.com/859-408/000-029</a>
	<b>Item no.: 859-409</b> Jumper; for jumper slot; 9-way; insulated; light gray	<a href="http://www.wago.com/859-409">www.wago.com/859-409</a>
	<b>Item no.: 859-408/000-006</b> Jumper; for jumper slot; 8-way; insulated; blue	<a href="http://www.wago.com/859-408/000-006">www.wago.com/859-408/000-006</a>
	<b>Item no.: 859-403</b> Jumper; for jumper slot; 3-way; insulated; light gray	<a href="http://www.wago.com/859-403">www.wago.com/859-403</a>
	<b>Item no.: 859-409/000-005</b> Jumper; for jumper slot; 9-way; insulated; red	<a href="http://www.wago.com/859-409/000-005">www.wago.com/859-409/000-005</a>
	<b>Item no.: 859-404</b> Jumper; for jumper slot; 4-way; insulated; light gray	<a href="http://www.wago.com/859-404">www.wago.com/859-404</a>
	<b>Item no.: 859-409/000-006</b> Jumper; for jumper slot; 9-way; insulated; blue	<a href="http://www.wago.com/859-409/000-006">www.wago.com/859-409/000-006</a>
	<b>Item no.: 859-402/000-006</b> Jumper; for jumper slot; 2-way; insulated; blue	<a href="http://www.wago.com/859-402/000-006">www.wago.com/859-402/000-006</a>

Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 859-402</b> Jumper; for jumper slot; 2-way; insulated; light gray	<a href="http://www.wago.com/859-402">www.wago.com/859-402</a>
	<b>Item no.: 859-402/000-005</b> Jumper; for jumper slot; 2-way; insulated; red	<a href="http://www.wago.com/859-402/000-005">www.wago.com/859-402/000-005</a>
	<b>Item no.: 859-406/000-006</b> Jumper; for jumper slot; 6-way; insulated; blue	<a href="http://www.wago.com/859-406/000-006">www.wago.com/859-406/000-006</a>
	<b>Item no.: 859-406/000-029</b> Jumper; for jumper slot; 6-way; insulated; signal yellow	<a href="http://www.wago.com/859-406/000-029">www.wago.com/859-406/000-029</a>
	<b>Item no.: 859-407/000-006</b> Jumper; for jumper slot; 7-way; insulated; blue	<a href="http://www.wago.com/859-407/000-006">www.wago.com/859-407/000-006</a>
	<b>Item no.: 859-407/000-005</b> Jumper; for jumper slot; 7-way; insulated; red	<a href="http://www.wago.com/859-407/000-005">www.wago.com/859-407/000-005</a>
	<b>Item no.: 859-407/000-029</b> Jumper; for jumper slot; 7-way; insulated; yellow	<a href="http://www.wago.com/859-407/000-029">www.wago.com/859-407/000-029</a>
	<b>Item no.: 859-407</b> Jumper; for jumper slot; 7-way; insulated; light gray	<a href="http://www.wago.com/859-407">www.wago.com/859-407</a>
<b>End plate</b>		
End plate		
	<b>Item no.: 859-525</b> End and intermediate plate; 1 mm thick; gray	<a href="http://www.wago.com/859-525">www.wago.com/859-525</a>
<b>Marking accessories</b>		
Marking device		
	<b>Item no.: 210-110</b> Fiber-tip pen	<a href="http://www.wago.com/210-110">www.wago.com/210-110</a>
Marker		
	<b>Item no.: 2009-145</b> Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>
	<b>Item no.: 248-501</b> Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white	<a href="http://www.wago.com/248-501">www.wago.com/248-501</a>
	<b>Item no.: 248-504</b> Mini-WSB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	<a href="http://www.wago.com/248-504">www.wago.com/248-504</a>

Subject to changes. Please also observe the further product documentation!



**Item no.: 248-503**

Mini-WSB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-503](http://www.wago.com/248-503)



**Item no.: 248-506**

Mini-WSB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-506](http://www.wago.com/248-506)



**Item no.: 248-502**

Mini-WSB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/248-502](http://www.wago.com/248-502)

## Testing and measuring

### Testing accessories



**Item no.: 859-500**

Test pin; 1 mm Ø; with solder connection for test wire

[www.wago.com/859-500](http://www.wago.com/859-500)

## Tool

### Operating tool



**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

## Downloads

### Documentation

#### Bid Text

859-734 X81 - Datei	2019. 2. 19.	xml 3.9 kB	Download
------------------------	--------------	---------------	----------

859-734 docx - Datei	2019. 2. 20.	docx 15.8 kB	Download
-------------------------	--------------	-----------------	----------

#### Instruction Leaflet

Relay modules, Optocoupler modules	V 1.2.0 2019. 8. 30.	pdf 2.2 MB	Download
------------------------------------	-------------------------	---------------	----------

#### Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 859-734		URL	Download
----------------------	--	-----	----------

Subject to changes. Please also observe the further product documentation!



## CAE data

<a href="#">EPLAN Data Portal 859-734</a>	<a href="#">URL</a>	<a href="#">Download</a>
<a href="#">WSCAD Universe 859-734</a>	<a href="#">URL</a>	<a href="#">Download</a>
<a href="#">ZUKEN Portal 859-734</a>	<a href="#">URL</a>	<a href="#">Download</a>


## Environmental Product Compliance

### Compliance Search

<a href="#">Environmental Product Compliance 859-734</a>	<a href="#">URL</a>	<a href="#">Download</a>
Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 24 ... 260 VAC; Limiting continuous current: 0.5 A; 2-wire connection; zero-cross switching; Red status indicator; Module width: 6 mm; light gray		

## Installation Notes


### Conductor termination

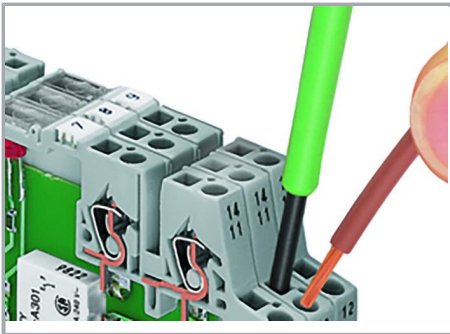

Conductor termination

### Commoning

Subject to changes. Please also observe the further product documentation!

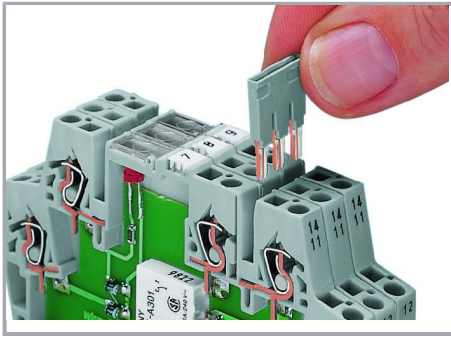

Easy commoning using adjacent jumpers

### Marking



Marking via Mini-WSB Quick Marking System

Subject to changes. Please also observe the further product documentation!