
PNP Silicon High-Voltage Transistors

- Suitable for video output stages in TV sets and switching power supplies
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BFN24, BFN26 (NPN)

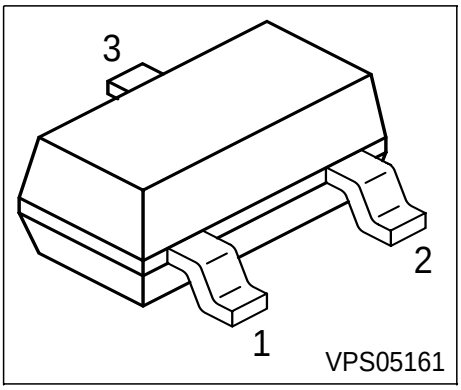

Type	Marking	Pin Configuration			Package
BFN25	FKs	1 = B	2 = E	3 = C	SOT23
BFN27	FLs	1 = B	2 = E	3 = C	SOT23

Maximum Ratings

Parameter	Symbol	BFN25	BFN27	Unit
Collector-emitter voltage	V_{CEO}	250	300	V
Collector-base voltage	V_{CBO}	250	300	
Emitter-base voltage	V_{EBO}	5	5	
DC collector current	I_C	200		mA
Peak collector current	I_{CM}	500		
Base current	I_B	100		
Peak base current	I_{BM}	200		
Total power dissipation, T_S = 74 °C	P_{tot}	360		mW
Junction temperature	T_j	150		°C
Storage temperature	T_{stg}	-65 ... 150		

Thermal Resistance

Junction - soldering point[1)]	R_{thJS}	≤210	K/W

[1]For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at T_A = 25°C, unless otherwise specified.


Parameter		Symbol	Values			Unit
			min.	typ.	max.	
DC Characteristics						
Collector-emitter breakdown voltage		$V_{(BR)CEO}$				V
I_C = 1 mA, I_B = 0	BFN25		250	-	-	
	BFN27		300	-	-	
Collector-base breakdown voltage		$V_{(BR)CBO}$				
I_C = 100 µA, I_E = 0	BFN25		250	-	-	
	BFN27		300	-	-	
Emitter-base breakdown voltage		$V_{(BR)EBO}$	5	-	-	
I_E = 100 µA, I_C = 0						
Collector cutoff current		I_{CBO}				nA
V_{CB} = 200 V, I_E = 0	BFN25		-	-	100	
V_{CB} = 250 V, I_E = 0	BFN27		-	-	100	
Collector cutoff current		I_{CBO}				µA
V_{CB} = 200 V, I_E = 0 , T_A = 150 °C	BFN25		-	-	20	
V_{CB} = 250 V, I_E = 0 , T_A = 150 °C	BFN27		-	-	20	
Emitter cutoff current		I_{EBO}	-	-	100	nA
V_{EB} = 3 V, I_C = 0						
DC current gain 1)		h_{FE}				-
I_C = 1 mA, V_{CE} = 10 V			25	-	-	
I_C = 10 mA, V_{CE} = 10 V			40	-	-	
I_C = 30 mA, V_{CE} = 10 V	BFN25		40	-	-	
	BFN27		30	-	-	
Collector-emitter saturation voltage1)		V_{CEsat}				V
I_C = 20 mA, I_B = 2 mA	BFN25		-	-	0.4	
	BFN27		-	-	0.5	
Base-emitter saturation voltage 1)		V_{BEsat}	-	-	0.9	
I_C = 20 mA, I_B = 2 mA						

1) Pulse test: t < 300µs; D < 2%

Electrical Characteristics at T_A = 25°C, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Transition frequency I_C = 20 mA, V_{CE} = 10 V, f = 20 MHz	f_T	-	100	-	MHz
Collector-base capacitance V_{CB} = 30 V, f = 1 MHz	C_{cb}	-	2.5	-	pF

Total power dissipation $P_{tot} = f(T_S)$

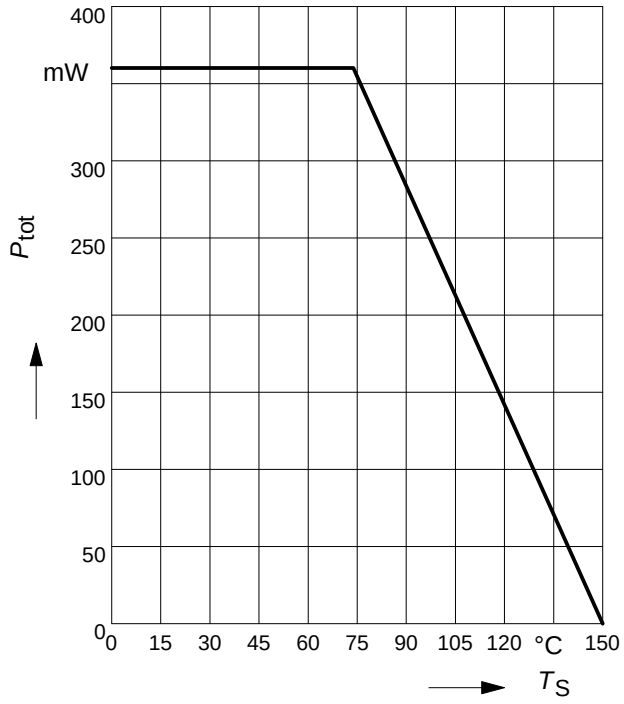


Transition frequency $f_T = f(I_C)$

V_{CE} = 10V

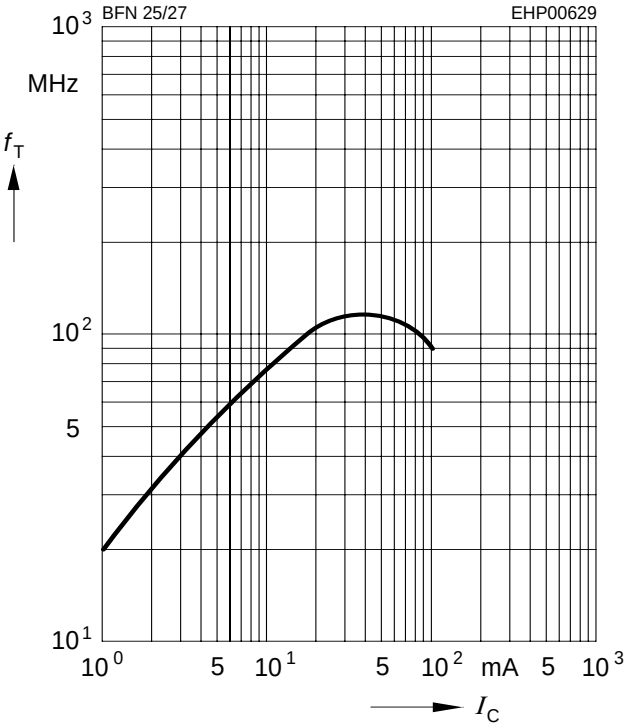


Permissible pulse load

$P_{totmax} / P_{totDC} = f(t_p)$

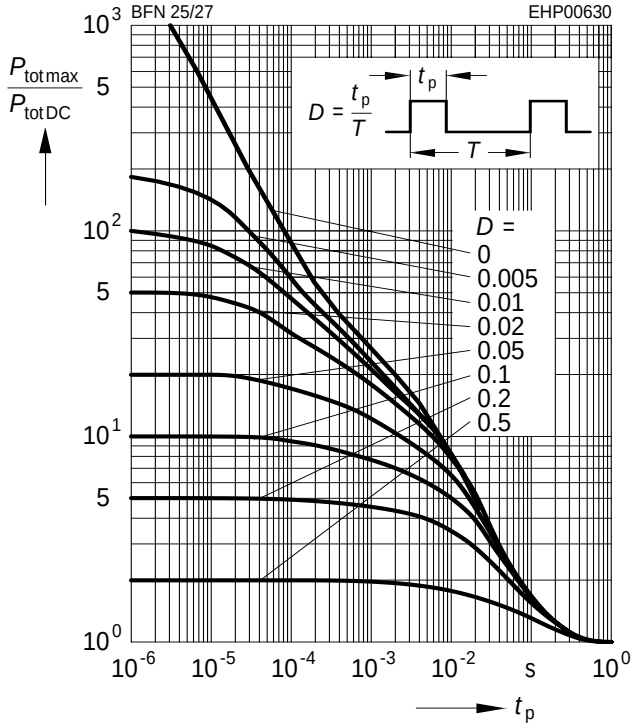


Operating range $I_C = f(V_{CEO})$

T_A = 25°C, D = 0

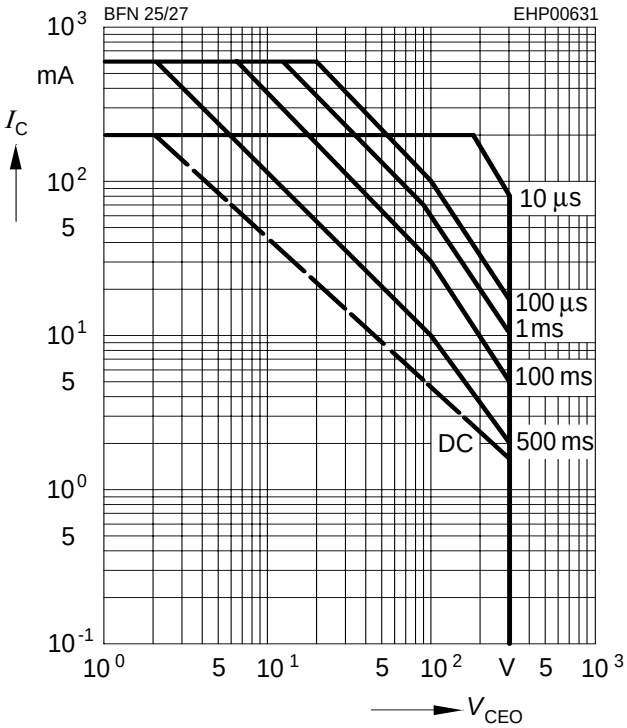


Collector current $I_C = f(V_{BE})$

V_{CE} = 10 V

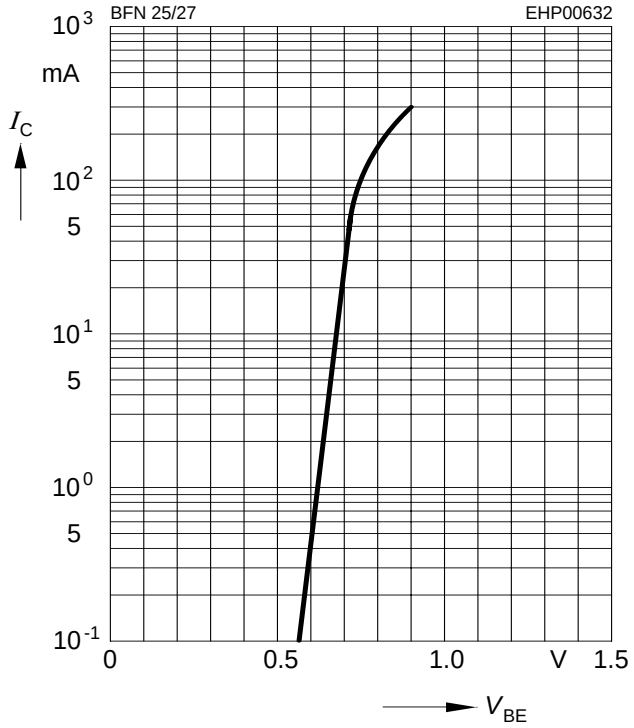

Collector cutoff current $I_{CBO} = f(T_A)$

V_{CB} = 200V

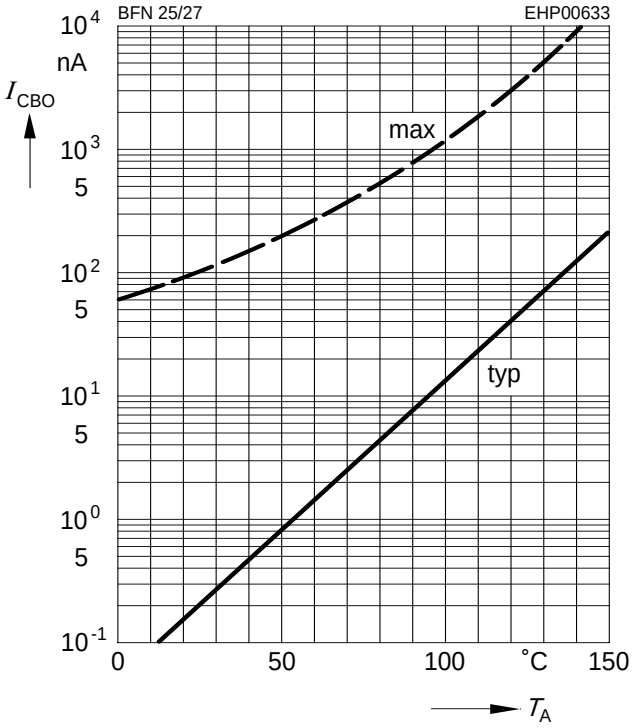

DC current gain $h_{FE} = f(I_C)$

V_{CE} = 10V

