


FEATURES

- Repetitive Peak Off-state Voltage : $V_{DRM}=600V$.
- R.M.S On-State Current : $I_{T(RMS)}=3A$.
- High Commutation (dv/dt)
- Isolation Voltage : $V_{ISOL}=1500V$ AC
(UL Recognized : E166398)

APPLICATIONS

- Switching Mode Power Supply
- Speed Control of Small Motors
- Solid State Relay
- Light Dimmer
- Washing Machine
- Temperature Control of Heater

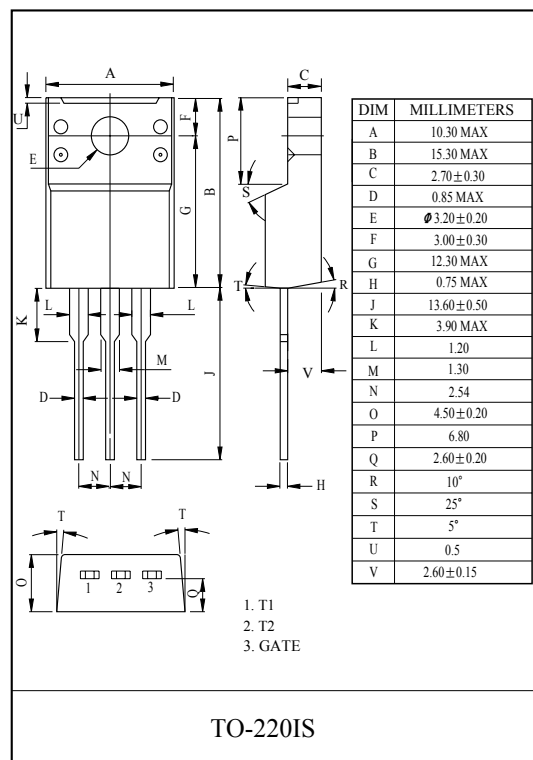

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Non-Repetitive Peak Off-state Voltage	V_{DSM}	700	V
Repetitive Peak Off-state Voltage	V_{DRM}	600	V
R.M.S On-state Current (Full Sine Waveform Tc=105°C)	$I_{T(RMS)}$	3	A
Peak One Cycle Surge On-state Current (Non-Repetitive)	I_{TSM}	30 (50Hz 1 Cycle) 33 (60Hz 1 Cycle)	A
I^2t Limit Value (1mS ≤ t ≤ 10mS)	I^2t	4.5	A ² S
Peak Gate Power Dissipation	P_{GM}	3	W
Average Gate Power Dissipation	$P_{G(AV)}$	0.3	W
Peak Gate Voltage	V_{GM}	10	V
Peak Gate Current	I_{GM}	1	A
Junction Temperature	T_j	-40 ~ 125	°C
Storage Temperature Range	T_{stg}	-40 ~ 125	°C
Isolation Voltage (Ac, t=1min.)	V_{ISOL}	1500	V


T3A6CI

ELECTRICAL CHARACTERISTICS (Ta=25℃)


CHARACTERISTIC		SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Repetitive Peak Off-state Current		I _{DRM}	V _{DRM} =Rated		-	-	20	μA
Gate Trigger Voltage	I	V _{GT}	V _D =12V, R _L =20 Ω	T ₂ (+), Gate(+)	-	-	1.5	V
	II			T ₂ (+), Gate(-)	-	-	1.5	
	III			T ₂ (-), Gate(-)	-	-	1.5	
	IV			T ₂ (-), Gate(+)	-	-	2.0	
Gate Trigger Current	I	I _{GT}		T ₂ (+), Gate(+)	-	-	5	mA
	II			T ₂ (+), Gate(-)	-	-	5	
	III			T ₂ (-), Gate(-)	-	-	5	
	IV			T ₂ (-), Gate(+)	-	-	10	
Peak On-State Voltage		V _{TM}	I _{TM} =4.5A		-	-	1.5	V
Gate Non-Trigger Voltage		V _{GD}	V _D =Rated, T _c =125℃		0.2	-	-	V
Holding Current		I _H	V _D =12V, I _{TM} =1A		-	-	30	mA
Critical Rate of Rise of Off-state Voltage		d _v /d _t	T _j =125℃, V _{DRM} =Rated Exponential Rise		-	100	-	V/μS
Critical Rate of Rise of Off-state Voltage at commutation		(d _v /d _t)C	T _j =125℃, (di/dt)C=-2A/mS, V _D =2/3V _{DRM}		10	-	-	V/μS
Thermal Resistance		R _{th(j-c)}	Junction to Case, AC		-	-	4.2	℃/W

T3A6CI


GATE TRIGGER CHARACTERISTIC

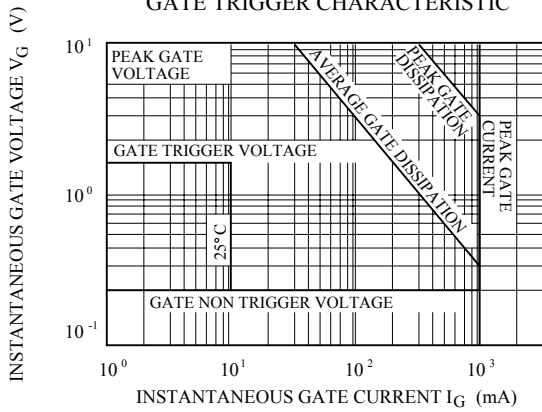


$i_T - v_T$

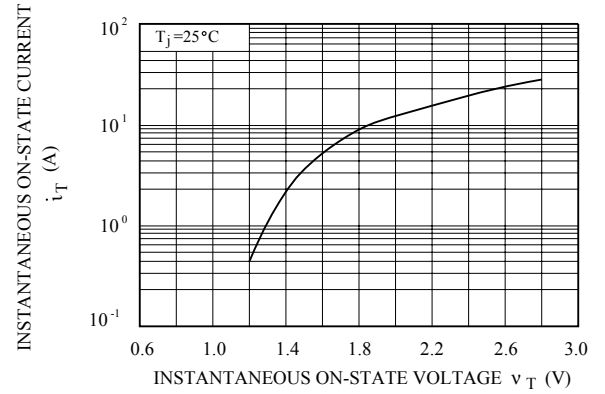


SURGE ON-STATE CURRENT(60Hz)

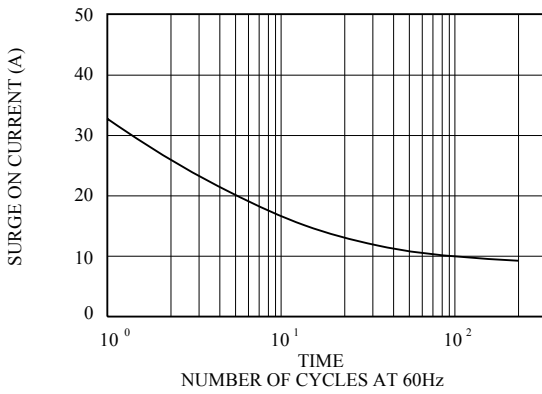


$T_a \text{ MAX} - I_{T(RMS)}$

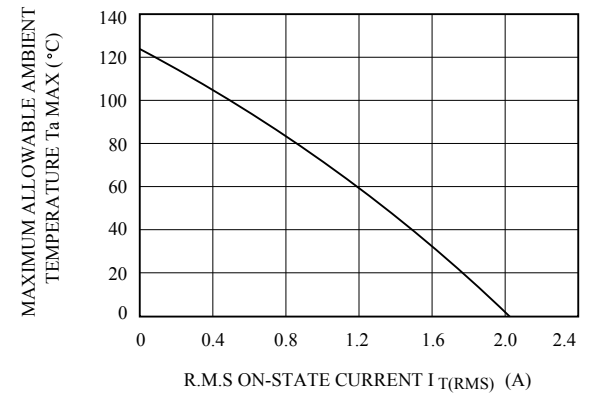

$T_c \text{ MAX} - I_{T(RMS)}$

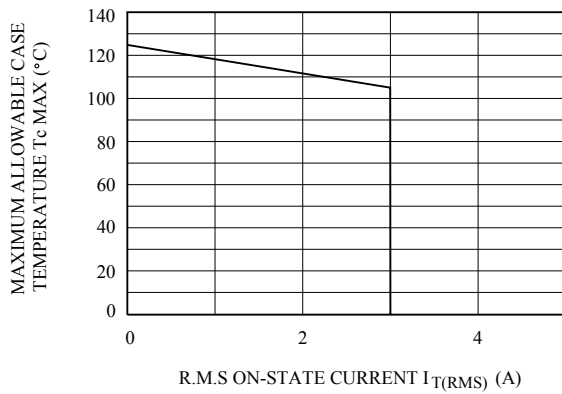

$P_{T(AV)} - I_{T(RMS)}$

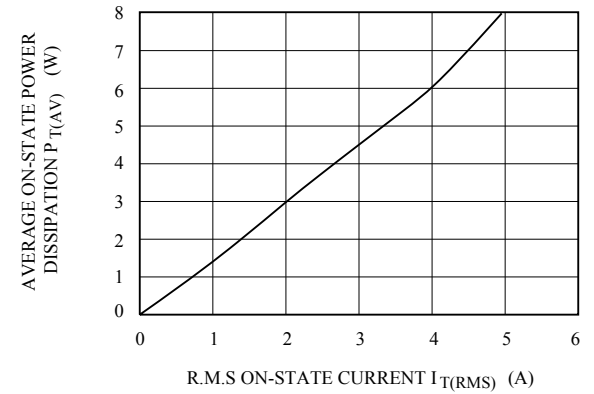

TRANSIENT THERMAL IMPEDANCE (JUNCTION TO CASE)

