GW4K30GH60

Ultra-Fast 60GHz Wireless 4K UHD Transmitter and Receiver Kit



- Wirelessly send 4K UHD video from one HDMI source to one HDMI TV/Projector
- Extends signals up to 60 Ft. in-room
- Uncompressed audio and video at near-zero latency - ideal for gaming and streaming
- Resolutions up to 3840 x 2160 @30Hz
- Minimal interference with existing Wi-Fi devices via 60GHz wireless frequency

4K Ultra HD Without Wires


The Ultra-Fast 60GHz Wireless 4K UHD Video Extender (GW4K30GH60) is an ultra-high-performance wireless AV solution that enables you to transmit 4K Ultra High Definition video and audio from an HDMI source over distances up to 60 feet with near-zero latency.

- Wirelessly send 4K UHD video from one HDMI source to one HDMI TV/Projector
- Extends signals up to 60 Ft. in-room
- Uncompressed audio and video at near-zero latency - ideal for gaming and streaming
- Resolutions up to 3840 x 2160 @30Hz
- Minimal interference with existing Wi-Fi devices via 60GHz wireless frequency
- Supports LPCM stereo audio format
- Plug-n-Play - Transmitter and receiver come pre-paired from factory
- Dedicated closed wireless system - Requires no Wi-Fi network
- Advanced wireless technology speeds to 18 Gbps
- LED status lights for source/display connections and wireless link
- Supports dual power option via USB or included AC adapter
- Compact mountable design for easy placement
- HDCP 2.2 compliant
- Supports 4K UHD







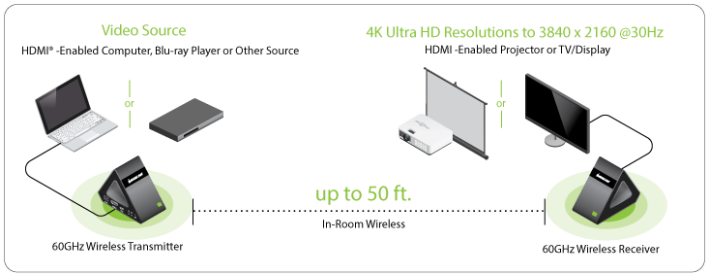

Requirements

- Video source with HDMI output
- Video display with HDMI input
- AC power outlets or power USB port

Package Contents

- 1 x GW4K30GH60 Transmitter
- 1 x GW4K30GH60 Receiver
- 2 x 3 Foot 2.0 HDMI Cables
- 2 x 5VDC/2A Switching Power Supply
- 1 x Quick Start Guide
- 1 x Warranty Card

Specifications

Function	GW4K30GH60
Connectors	
Video Input	HDCP 2.2 Support
Video Output	HDCP 2.2 Support
Power	5V/1A
Video Resolution	3840 x 2160 @ 30Hz
Video Streaming	Uncompressed
Audio	
Audio Output	LPCM Stereo
Frequency Band	60 GHz
Antenna Type	Printed Circuit Board
Environment	
Operation Temperature	32~122ºF (0~50ºC)
Storage Temperature	14~158ºF (-10~70ºC)
Humidity	10 - 90%
Power Adapter	Input: 100~240 VAC/0.3A, Output: 5VDC/2A
Housing	
Case	Aluminum
Warranty	1-Year
Power Consumption	3W

Dimensions	GW4K30GH60
Unit Dimensions	
Height	3"
Depth	4"
Length	1.125"
Unit Package Dimensions	
Height	5.25"
Depth	8"
Length	6"
Master Carton	
Width	17"
Height	14.5"
Depth	6.75"
Master Carton Qty.	6
Weight	
Master Carton Wt.	13.60 lb
Unit Pack Wt.	2.10 lb
Unit Wt.	0.50 lb (x2)