

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [34773-9140](#)  
**Status:** **Active**  
**Overview:** [Stac64™ Single, Multi-Pocket and Hybrid Header System](#)  
**Description:** [Stac64™ Hybrid Receptacle Connector, 14 Circuits, Right-Angle, Polarization A, Black; Tube](#)

**Documents:**

[3D Model](#) [Product Specification PS-34969-100 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)


**General**

Product Family	PCB Headers
Series	<a href="#">34773</a>
Application	Power, Wire-to-Board
Comments	Current is dependent on connector size, ambient temperature, blade size and related factors. 2.80mm – 30.0A; 0.64mm - 6.0A. Polarization A
Overview	<a href="#">Stac64™ Single, Multi-Pocket and Hybrid Header System</a>
Product Name	Stac64™
UPC	884982910553

**Physical**

Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Circuits Detail	19 x 0.64 and 4 x 2.8
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	10.313/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm, 5.25mm
Pitch - Termination Interface	2.54mm, 5.25mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	N/A

**Electrical**

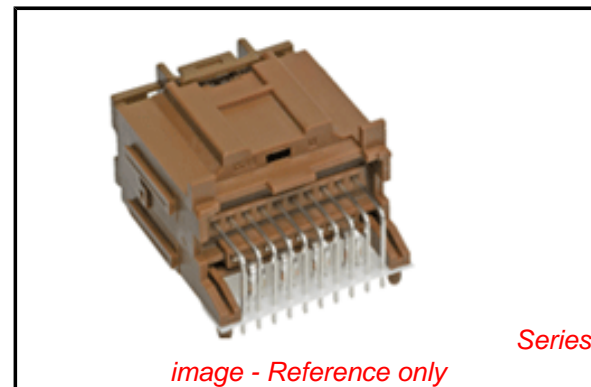

*image - Reference only*

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

**Contains SVHC: No**

**Low-Halogen Status**

**Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[34773Series](#)

**Mates With**

[34969 Stac64™ Hybrid Receptacle Connector](#)

**Use With**

[CTX64 Female Terminal 34803](#)

Current - Maximum per Contact 30A, 6A  
Voltage - Maximum 500V

**Material Info**

**Reference - Drawing Numbers**

Product Specification PS-34969-100  
Sales Drawing SD-34708-200, SD-34708-300, SD-34708-400,  
SD-34773-010

This document was generated on 09/11/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**