TF709..Y

Fast Switching Thyristor

Replaces March 1998 version, DS4277-2.2

DS4277-3.0 January 2000

APPLICATIONS


- High Power Inverters And Choppers
- UPS
- Railway Traction
- Induction Heating
- AC Motor Drives
- Cycloconverters

KEY PARAMETERS

V_{DRM}	1400V
$I_{T(RMS)}$	900A
I_{TSM}	12000A
dV/dt	300V/µs
dI/dt	500A/µs
t_q	25µs

FEATURES

- Double Side Cooling
- High Surge Capability
- High Voltage

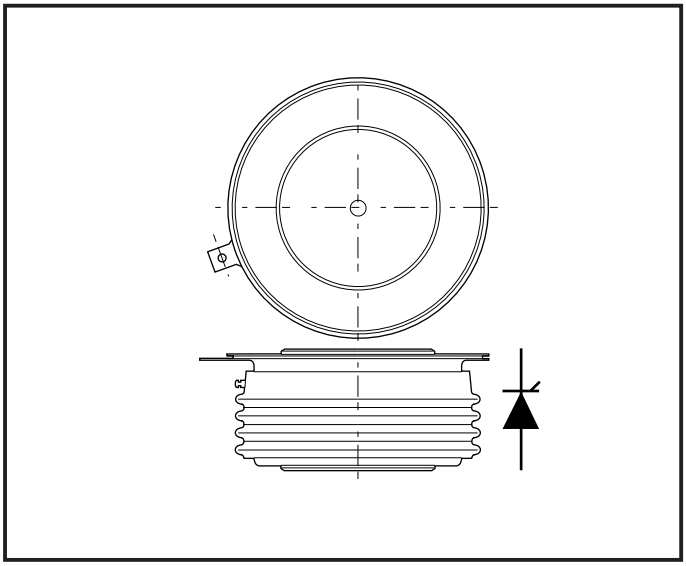

Outline type code: MU171.
See Package Details for further information.

VOLTAGE RATINGS

Type Number	Repetitive Peak Voltages V_{DRM} V_{RRM}	Conditions
TF709 14Y TF709 12Y TF709 10Y TF709 08Y TF709 06Y	1400 1200 1000 800 600	$V_{RSM} = V_{RRM} + 100V$ $I_{DRM} = I_{RRM} = 40mA$ at V_{RRM} or V_{DRM} & T_{vj}

Lower voltage grades available.

CURRENT RATINGS

Symbol	Parameter	Conditions	Max.	Units
$I_{T(AV)}$	Mean on-state current	Half sinewave, 50Hz, T_{case} = 80°C	573	A
$I_{T(RMS)}$	RMS value	Half sinewave, 50Hz, T_{case} = 80°C	900	A


SURGE RATINGS

Symbol	Parameter	Conditions	Max.	Units
I_{TSM}	Surge (non-repetitive) on-state current	10ms half sine; V_R = 0% V_{RRM}, T_j = 125˚C	12.0	kA
I^2t	I^2t for fusing	10ms half sine; V_R = 0% V_{RRM}, T_j = 125˚C	720 x 10^3	A^2s

THERMAL AND MECHANICAL DATA

Symbol	Parameter	Conditions		Min.	Max.	Units
$R_{th(j-c)}$	Thermal resistance - junction to case	Double side cooled	dc	-	0.04	ºC/W
		Single side cooled	Anode dc	-	0.072	ºC/W
			Cathode dc	-	0.096	ºC/W
$R_{th(c-h)}$	Thermal resistance - case to heatsink	Clamping force 10.0kN with mounting compound	Double side	-	0.01	ºC/W
			Single side	-	0.02	ºC/W
T_{vj}	Virtual junction temperature	On-state (conducting)		-	125	ºC
		Reverse (blocking)		-	125	ºC
T_{stg}	Storage temperature range			-40	150	ºC
-	Clamping force			14.25	15.75	kN

MEASUREMENT OF RECOVERED CHARGE - Q_{RA1}

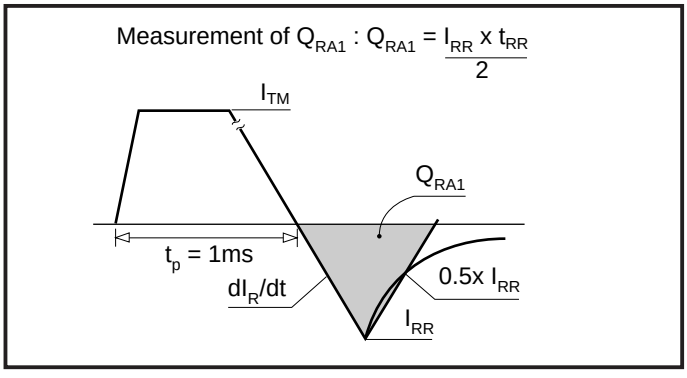

DYNAMIC CHARACTERISTICS

Symbol	Parameter	Conditions		Min.	Max.	Units
V_{TM}	Maximum on-state voltage	At 2000A peak, T_{case} = 25°C		-	2.05	V
I_{RRM}/I_{DRM}	Peak reverse and off-state current	At V_{RRM}/V_{DRM}, T_{case} = 125°C		-	40	mA
dV/dt	Maximum linear rate of rise of off-state voltage	Linear to 60% V_{DRM} T_j = 125°C, Gate open circuit		-	300	V/µs
dI/dt	Rate of rise of on-state current	Gate source 20V, 20Ω $t_r \leq 0.5\mu s$, T_j = 125˚C	Repetitive 50Hz	-	500	A/µs
			Non-repetitive	-	800	A/µs
$V_{T(TO)}$	Threshold voltage	At T_{vj} = 125°C		-	1.25	V
r_T	On-state slope resistance	At T_{vj} = 125°C		-	0.4	mΩ
t_{gd}	Delay time	T_j = 25˚C, I_T = 50A, V_D = 300V, I_G = 1A, dI/dt = 50A/µs, dI_G/dt = 1A/µs		-	1.5*	µs
$t_{(ON)TOT}$	Total turn-on time			-	3.5*	µs
I_H	Holding current	T_j = 25°C, I_{TM} = 1A, V_D = 12V		100*	-	mA
I_L	Latching current	T_j = 25°C, I_G = 0.5A, V_D = 12V		300*	-	mA
t_q	Turn-off time	T_j = 125˚C, I_T = 250A, V_R = 50V, dV/dt = 20V/µs (Linear to 60% V_{DRM}), dI_R/dt = 50A/µs, Gate open circuit	t_q code: Y	-	25	µs

**Typical value.*

GATE TRIGGER CHARACTERISTICS AND RATINGS

Symbol	Parameter	Conditions	Typ.	Max.	Units
V_{GT}	Gate trigger voltage	V_{DRM} = 12V, T_{case} = 25°C, R_L = 6Ω	-	3.0	V
I_{GT}	Gate trigger current	V_{DRM} = 12V, T_{case} = 25°C, R_L = 6Ω	-	200	mA
V_{GD}	Gate non-trigger voltage	At V_{DRM} T_{case} = 125°C, R_L = 1kΩ	-	0.2	V
V_{RGM}	Peak reverse gate voltage		-	5.0	V
I_{FGM}	Peak forward gate current	Anode positive with respect to cathode	-	10	A
P_{GM}	Peak gate power		-	50	W
$P_{G(AV)}$	Mean gate power		-	3	W

CURVES

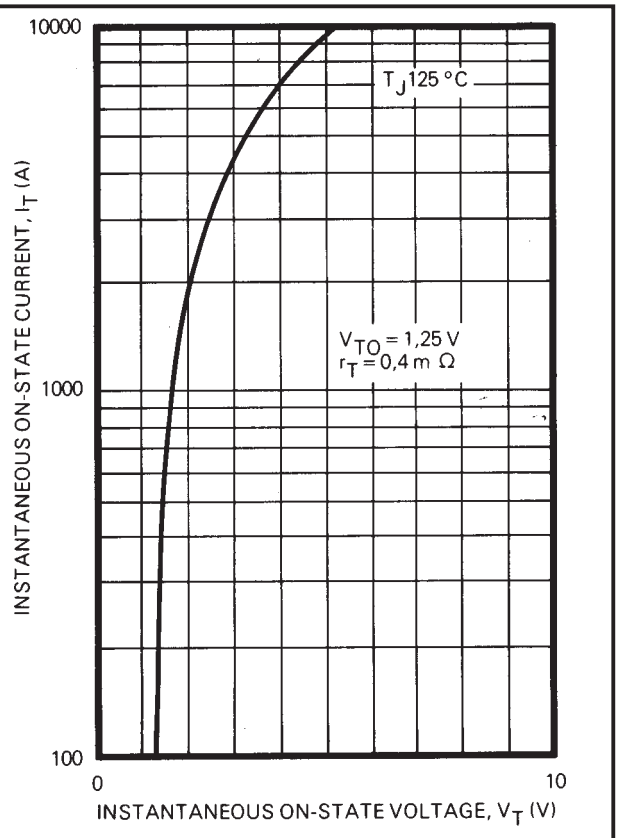


FIG.1 MAXIMUM (LIMIT) ON-STATE CHARACTERISTICS

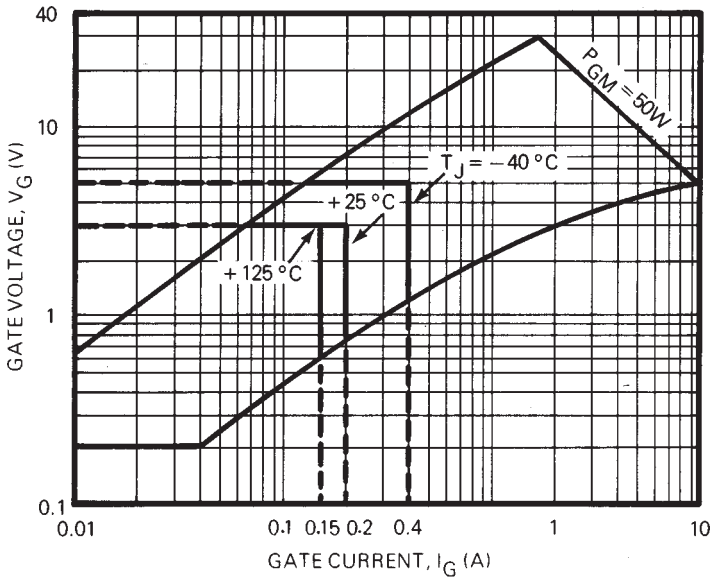


FIG.2 GATE CHARACTERISTICS

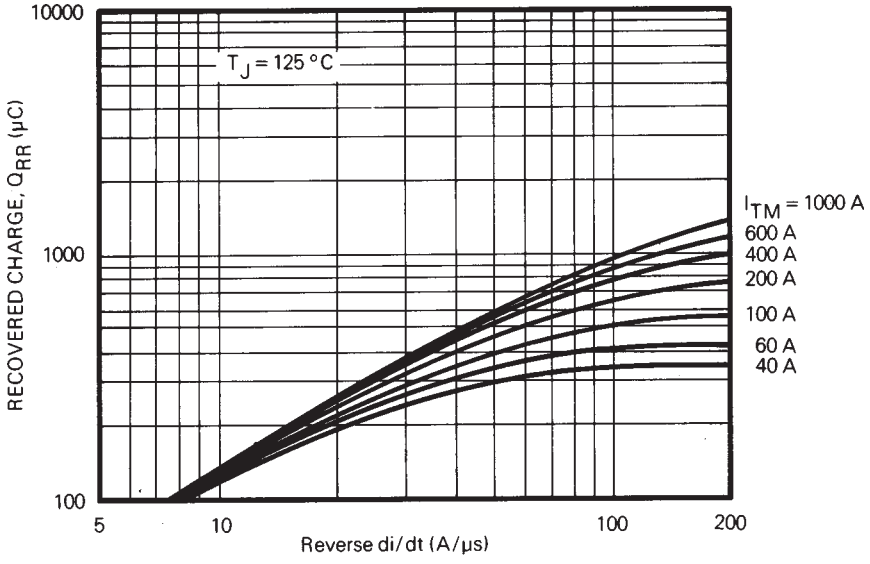


FIG.3 TYPICAL RECOVERED CHARGE (TRAPEZOIDAL CURRENT WAVEFORM)

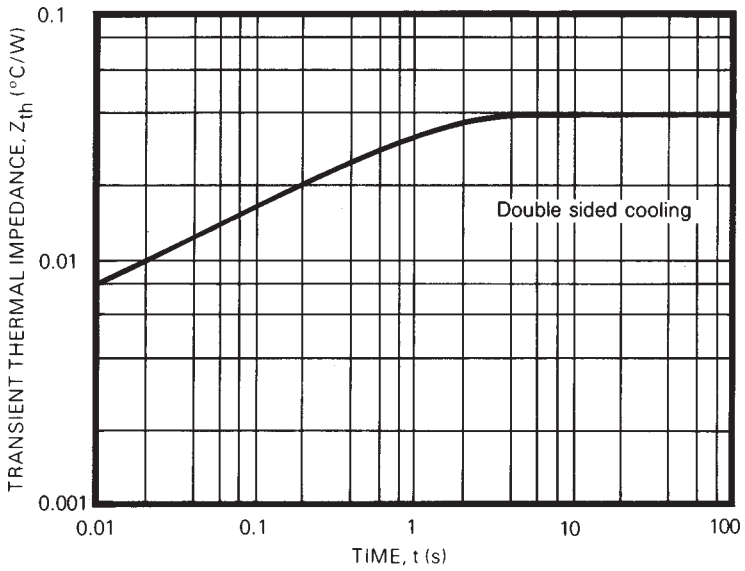


FIG.4 TRANSIENT THERMAL IMPEDANCE - JUNCTION TO CASE

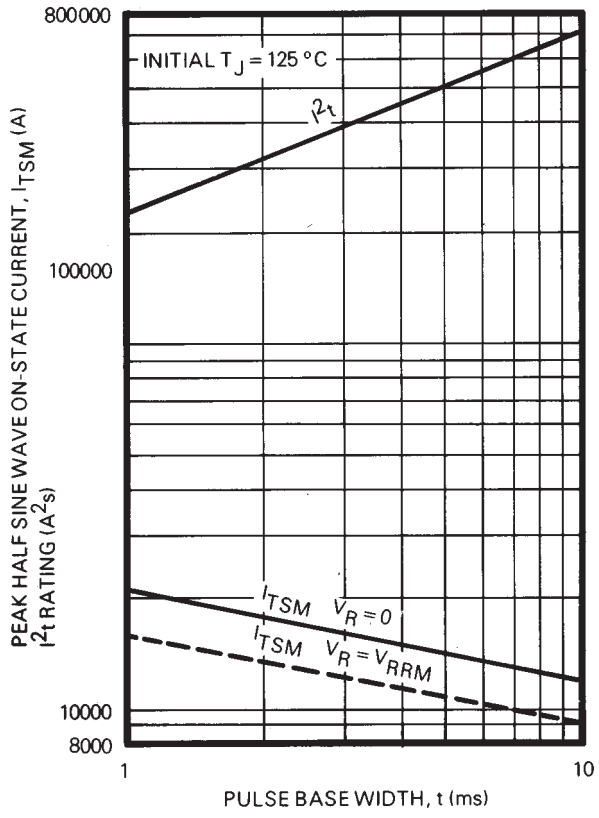


FIG.5 NON-REPETITIVE SUB-CYCLE SURGE ON-STATE CURRENT AND I2t RATING

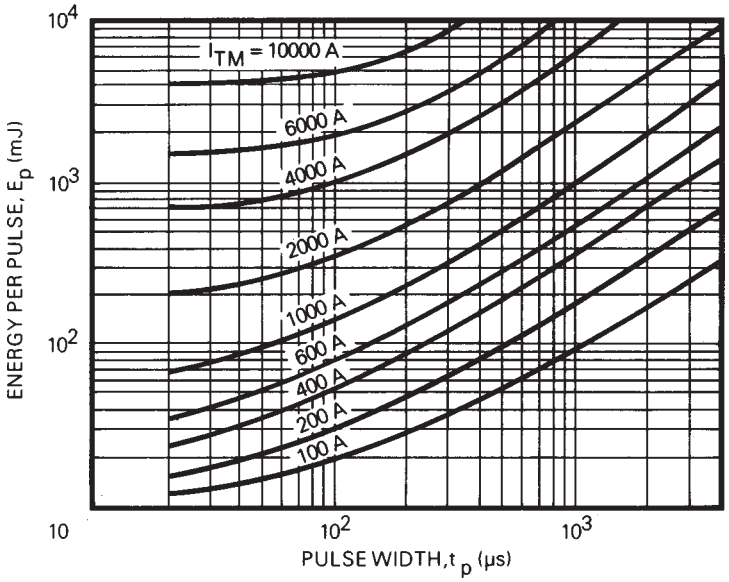



FIG.6 ENERGY PER PULSE FOR SINUSOIDAL PULSES

NOTES:
1. $V_D \leq 600V$.
2. $V_R \leq 10V$.
3. R.C Snubber, C = 0.22µF, R = 4.7Ω



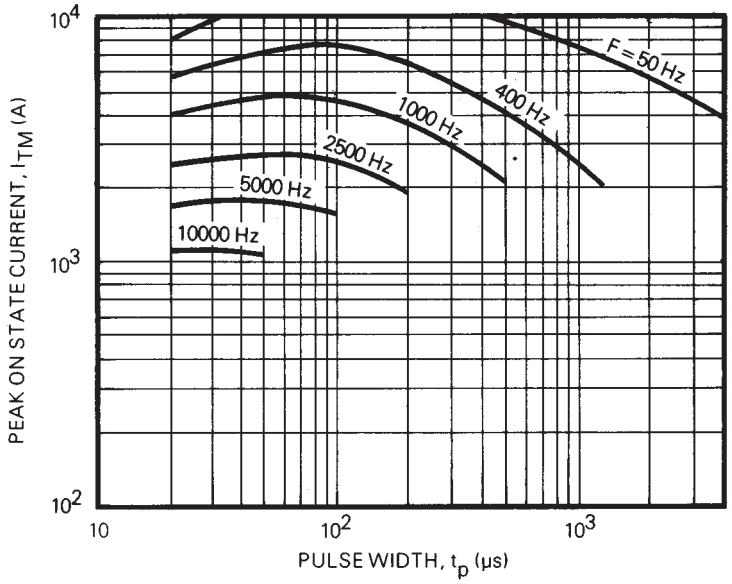



FIG.7 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 65˚C

NOTES:
1. $V_D \leq 600V$.
2. $V_R \leq 10V$.
3. R.C Snubber, C = 0.22µF, R = 4.7Ω



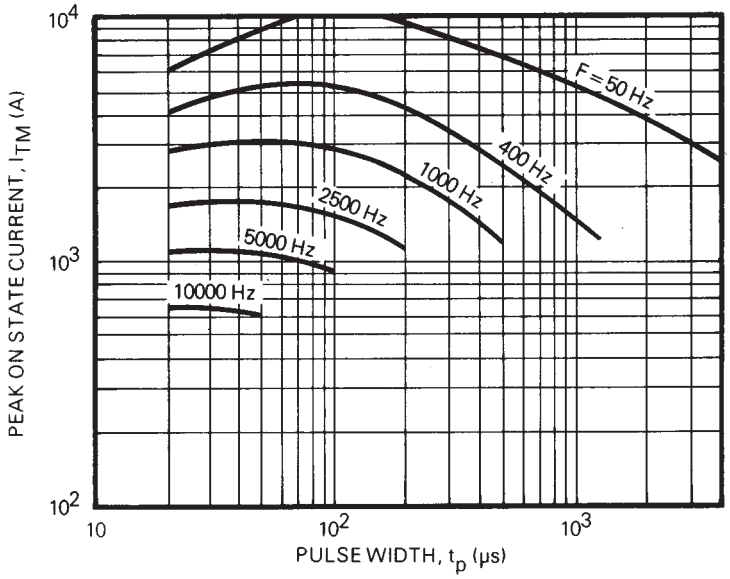



FIG.8 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 90˚C

NOTES:
1. $V_D \leq 600V$.
2. $V_R \leq 10V$.
3. R.C Snubber, C = 0.22µF, R = 4.7Ω



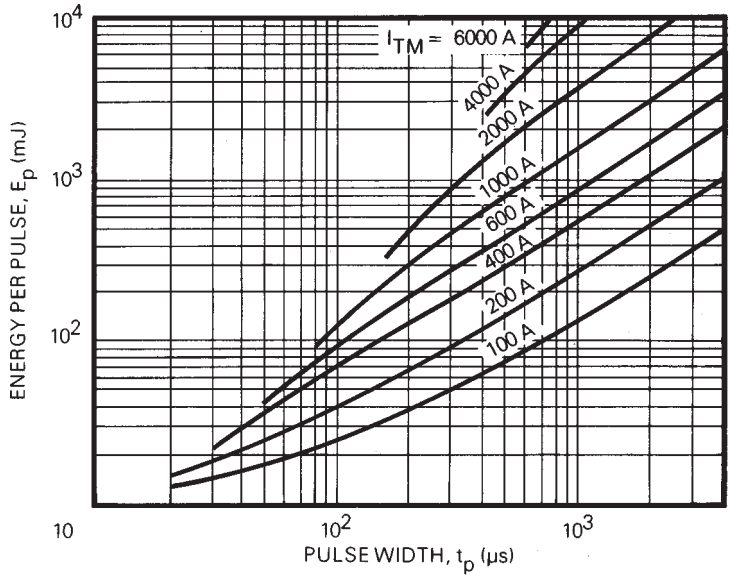



FIG.9 ENERGY PER PULSE FOR TRAPEZOIDAL PULSES

NOTES:
1. dI/dt = 25A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



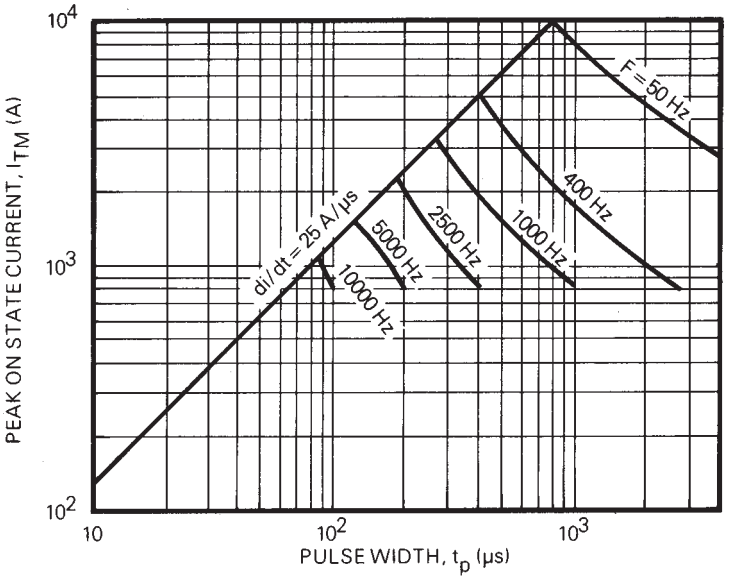



FIG.10 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 65˚C

NOTES:
1. dI/dt = 25A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



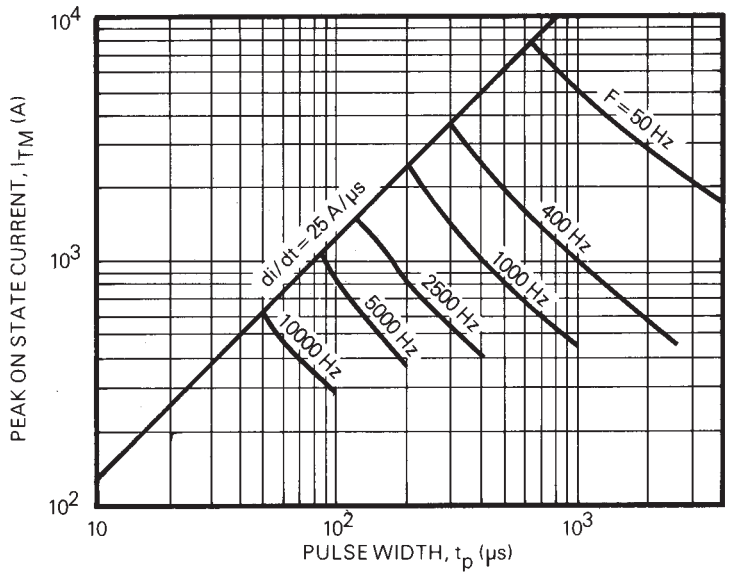



FIG.11 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 90˚C

NOTES:
1. dI/dt = 25A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



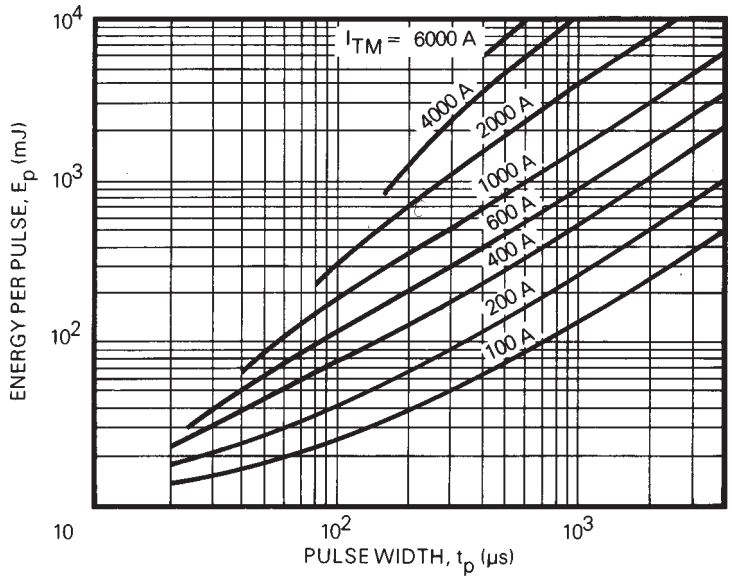



FIG.12 ENERGY PER PER FOR TRAPEZOIDAL PULSES

NOTES:
1. dI/dt = 50A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



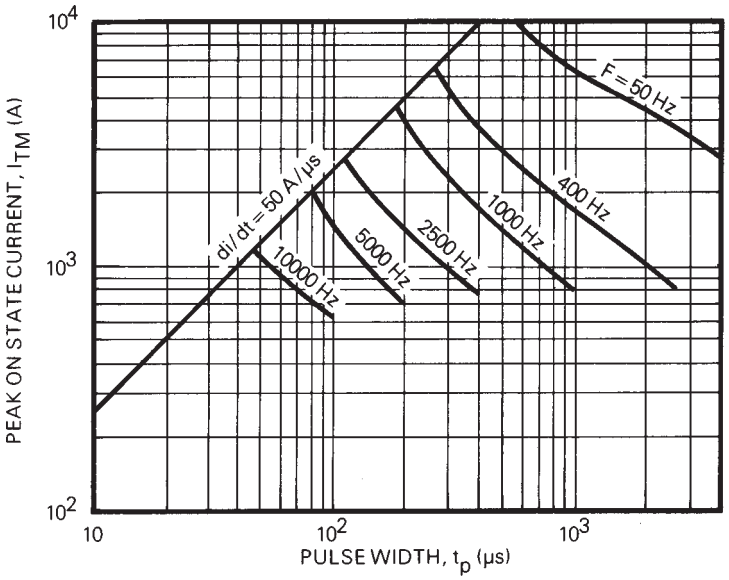



FIG.13 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 65°C

NOTES:
1. dI/dt = 50A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



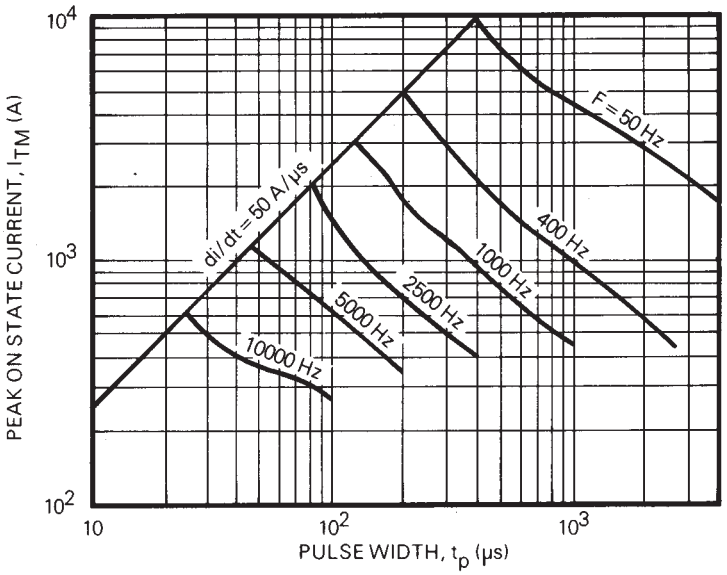



FIG.14 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 90°C

NOTES:
1. dI/dt = 50A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



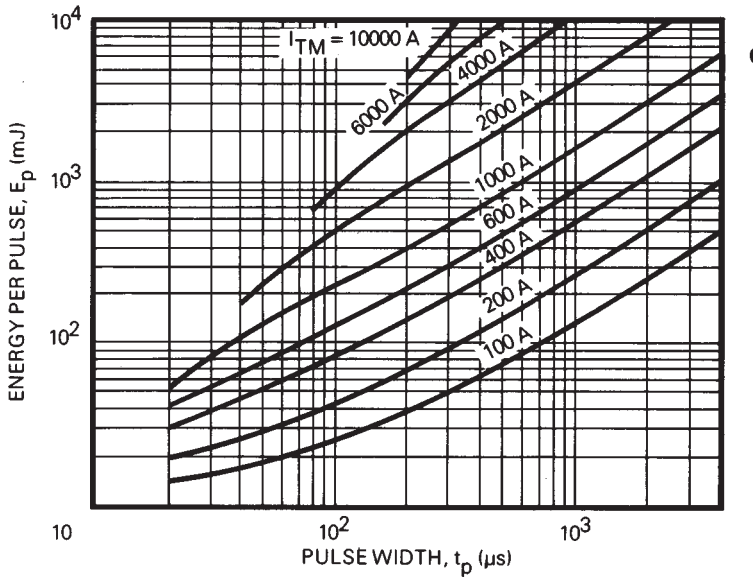



FIG.15 ENERGY PER PULSE FOR TRAPEZOIDAL PULSES

NOTES:
1. dI/dt = 100A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



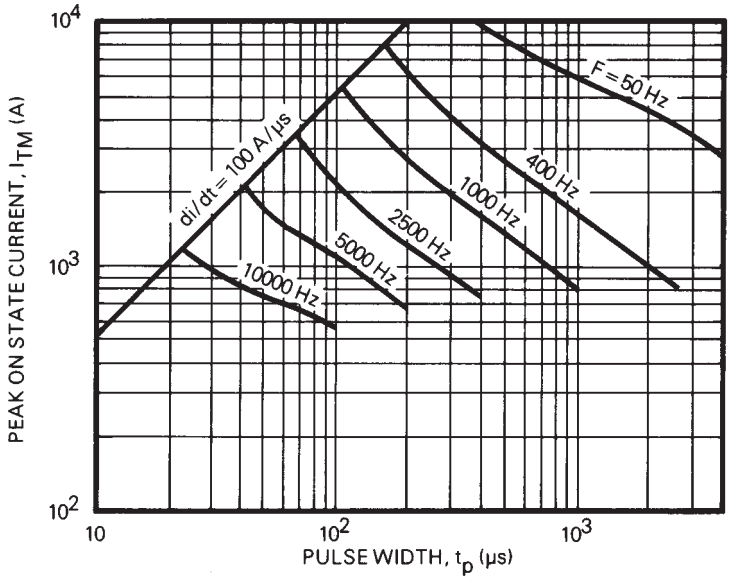



FIG.16 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 65˚C

NOTES:
1. dI/dt = 100A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω




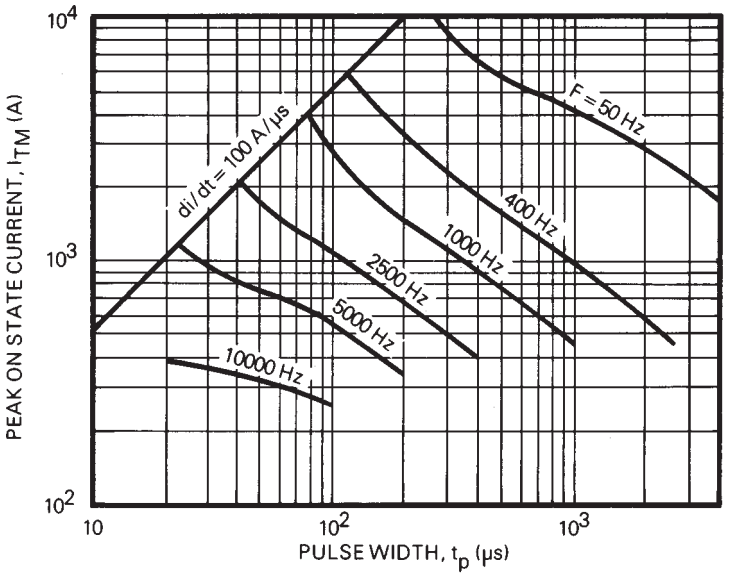



FIG.17 MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT vs PULSE WIDTH FOR Tc = 90˚C

NOTES:
1. dI/dt = 100A/µs
2. $V_D \leq 600V$.
3. $V_R \leq 10V$.
4. R.C Snubber, C = 0.22µF, R = 4.7Ω



PACKAGE DETAILS

For further package information, please contact your local Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

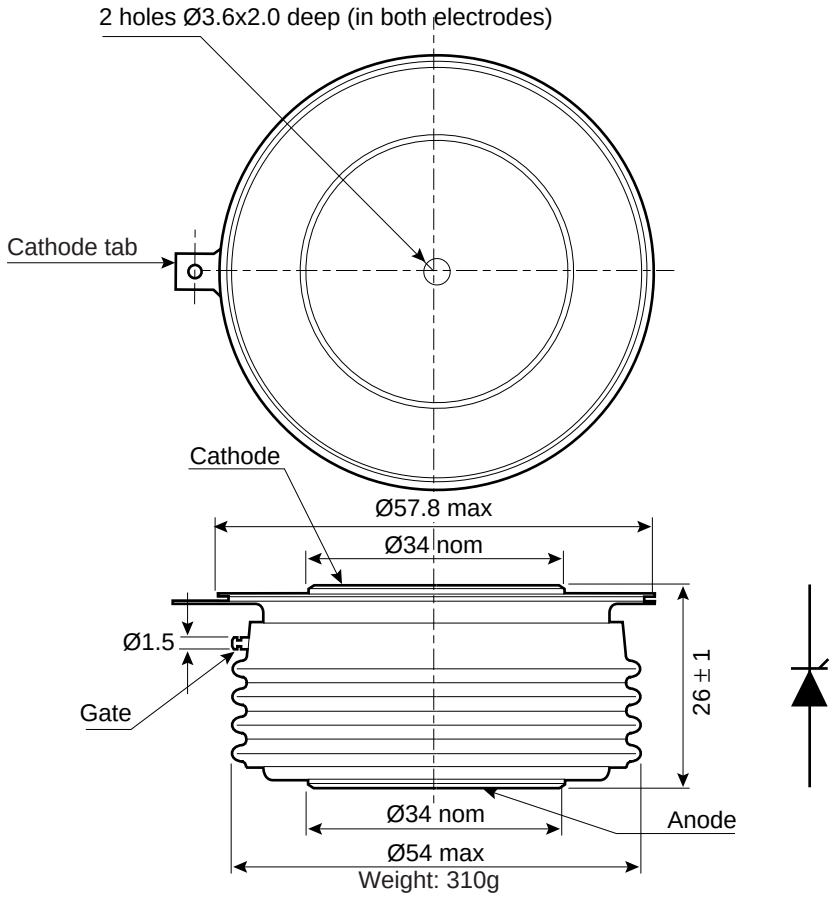

Nominal weight: 310g
Clamping force: 15kN ±10%
Lead length: 250mm

Package outine type code: MU171

ASSOCIATED PUBLICATIONS

Title	Application Note Number
Calculating the junction temperature or power semiconductors	AN4506
Gate triggering and the use of gate characteristics	AN4840
Recommendations for clamping power semiconductors	AN4839
The effect of temperature on thyristor performance	AN4870
Thyristor and diode measurement with a multi-meter	AN4853
Turn-on performance of thyristors in parallel	AN4999
Use of V_{TO}, r_T on-state characteristic	AN5001

POWER ASSEMBLY CAPABILITY

The Power Assembly group was set up to provide a support service for those customers requiring more than the basic semiconductor, and has developed a flexible range of heatsink / clamping systems in line with advances in device types and the voltage and current capability of our semiconductors.

We offer an extensive range of air and liquid cooled assemblies covering the full range of circuit designs in general use today. The Assembly group continues to offer high quality engineering support dedicated to designing new units to satisfy the growing needs of our customers.

Using the up to date CAD methods our team of design and applications engineers aim to provide the Power Assembly Complete solution (PACs).

DEVICE CLAMPS

Disc devices require the correct clamping force to ensure their safe operation. The PACs range offers a varied selection of pre-loaded clamps to suit all of our manufactured devices. This include cube clamps for single side cooling of 'T' 22mm

Clamps are available for single or double side cooling, with high insulation versions for high voltage assemblies.

Please refer to our application note on device clamping, AN4839

HEATSINKS

Power Assembly has it's own proprietary range of extruded aluminium heatsinks. They have been designed to optimise the performance or our semiconductors. Data with respect to air natural, forced air and liquid cooling (with flow rates) is available on request.

For further information on device clamps, heatsinks and assemblies, please contact your nearest Sales Representative or the factory.

DYNEX SEMICONDUCTOR

http://www.dynexsemi.com

e-mail: power_solutions@dynexsemi.com

HEADQUARTERS OPERATIONS
DYNEX SEMICONDUCTOR LTD
Doddington Road, Lincoln.
Lincolnshire. LN6 3LF. United Kingdom.
Tel: 00-44-(0)1522-500500
Fax: 00-44-(0)1522-500550

DYNEX POWER INC.
Unit 7 - 58 Antares Drive,
Nepean, Ontario, Canada K2E 7W6.
Tel: 613.723.7035
Fax: 613.723.1518
Toll Free: 1.888.33.DYNEX (39639)

CUSTOMER SERVICE CENTRES
France, Benelux, Italy and Spain Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50
North America Tel: 011-800-5554-5554. Fax: 011-800-5444-5444
UK, Germany, Scandinavia & Rest Of World Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020

SALES OFFICES
France, Benelux, Italy and Spain Tel: +33 (0)1 69 18 90 00. Fax: +33 (0)1 64 46 54 50
Germany Tel: 07351 827723
North America Tel: (613) 723-7035. Fax: (613) 723-1518. Toll Free: 1.888.33.DYNEX (39639) /
Tel: (831) 440-1988. Fax: (831) 440-1989 / Tel: (949) 733-3005. Fax: (949) 733-2986.
UK, Germany, Scandinavia & Rest Of World Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020
These offices are supported by Representatives and Distributors in many countries world-wide.
© Dynex Semiconductor 2000 Publication No. DS4277-3 Issue No. 3.0 January 2000
TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

Datasheet Annotations:

Dynex Semiconductor annotate datasheets in the top right hard corner of the front page, to indicate product status. The annotations are as follows:-

Target Information: This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

Preliminary Information: The product is in design and development. The datasheet represents the product as it is understood but details may change.

Advance Information: The product design is complete and final characterisation for volume production is well in hand.

No Annotation: The product parameters are fixed and the product is available to datasheet specification.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.