




1. Dimensions:

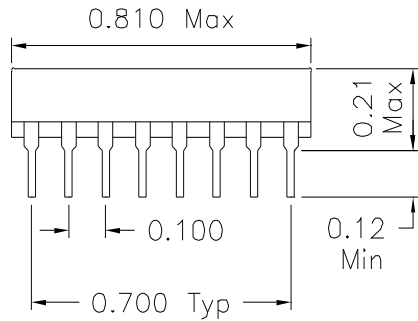

2. Schematic:

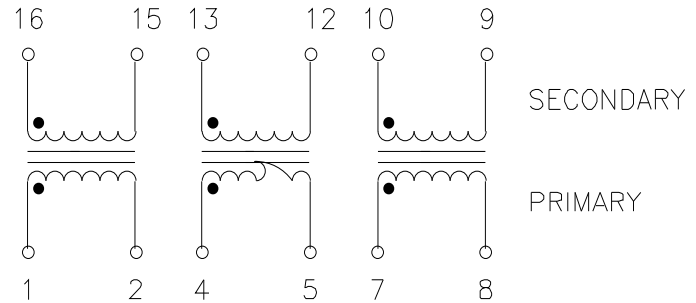

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: 1:1

PRI OCL: 90-154uH @100KHz 50mV

PRI/SEC Cw/w: 10pF Max. @100KHz 50mV


PRI/SEC Leakage Inductance: 0.35uH Max. @100KHz 50mV

PRI/SEC DC Resistance: 0.30 Ohms Max.


DOC. REV A/1

XFMR5 Inc		Title: ETHERNET AUI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch		P/N: XF12261A	REV. A
DWN.	李清儿	Apr-30-99	
CHK.	孙悦	Apr-30-99	
APP.	Joe Huff	Apr-30-99	

1. Dimensions:

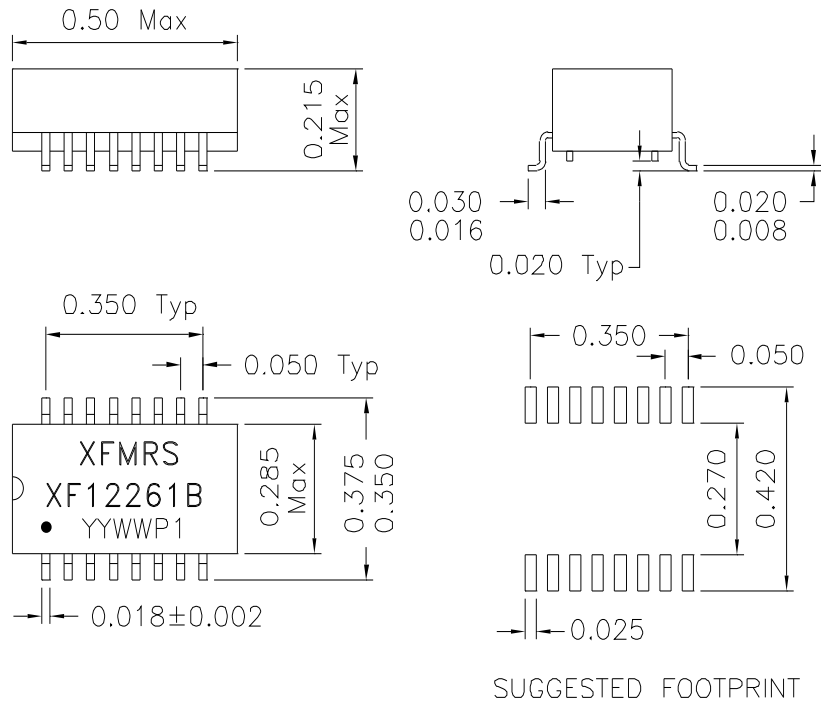

2. Schematic:

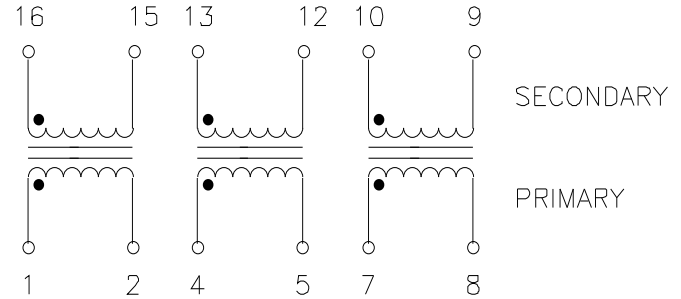

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: 1:1

PRI OCL: 90-154uH @100KHz 50mV

PRI/SEC Cw/w: 10pF Max. @100KHz 50mV

PRI/SEC Leakage Inductance: 0.35uH Max. @100KHz 50mV

PRI/SEC DC Resistance: 0.30 Ohms Max.

DOC. REV A/1

XFMRS Inc		Title: ETHERNET AUI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2.5:1 SHT 1 OF 1	P/N: XF12261B		REV. A
	DWN.	李清儿	Apr-30-99
	CHK.	孙悦	Apr-30-99
	APP.	Joe Huff	Apr-30-99