

Max. 135 m<sup>3</sup>/h

# AC axial fans

□ 119 x 25 mm




- **Material:** Housing: Die-cast aluminum  
Impeller: Mineral-reinforced PA plastic
- **Direction of air flow:** Exhaust over struts
- **Direction of rotation:** Counterclockwise, looking towards rotor
- **Connection:** Via 2 flat plugs 2.8 x 0.5 mm grounding lug for M4
- **Weight:** 320 g
- **Possible special versions:** (See page 12)  
- Moisture protection

- **Note:**  
Please note our new ACmaxx series.  
With identical mounting dimensions and voltages, this series achieves greater energy efficiency.  
See page 192.

Series 9900

| Nominal data | Air flow          |      | Nominal voltage | Frequency | Sound pressure level | Sound power level | Sinter sleeve bearings<br>Ball bearings | Power consumption | Nominal speed | Temperature range | Service life L <sub>10</sub> |    | Curve |
|--------------|-------------------|------|-----------------|-----------|----------------------|-------------------|---|-------------------|---------------|-------------------|------------------------------|----|-------|
|              | m <sup>3</sup> /h | cfm  |                 |           |                      |                   |   |                   |               |                   | VAC                          | Hz |       |
| 9956 L       | 84                | 49.4 | 230             | 50        | 29                   | 4.4               | ■                                       | 9.5               | 1850          | -40...+80         | 57 500 / 22 500              | ①  |       |
| 9956 M       | 104               | 61.2 | 230             | 50        | 35                   | 4.7               | ■                                       | 10.0              | 2250          | -40...+80         | 57 500 / 22 500              | ②  |       |
| 9950         | 117               | 68.9 | 230             | 50        | 37                   | 5.0               | □                                       | 14.0              | 2450          | -20...+70         | 47 500 / 22 500              | ③  |       |
| 9956         | 117               | 68.9 | 230             | 50        | 37                   | 5.0               | ■                                       | 14.0              | 2450          | -40...+70         | 47 500 / 22 500              | ③  |       |
| 9906 L       | 100               | 58.9 | 115             | 60        | 34                   | 4.6               | ■                                       | 8.0               | 2100          | -40...+80         | 62 500 / 25 000              | ④  |       |
| 9906 M       | 111               | 65.3 | 115             | 60        | 37                   | 5.0               | ■                                       | 8.0               | 2450          | -40...+80         | 62 500 / 25 000              | ⑤  |       |
| 9900         | 135               | 79.5 | 115             | 60        | 42                   | 5.4               | □                                       | 12.0              | 2850          | -20...+70         | 52 500 / 25 000              | ⑥  |       |
| 9906         | 135               | 79.5 | 115             | 60        | 42                   | 5.4               | ■                                       | 12.0              | 2850          | -40...+70         | 52 500 / 25 000              | ⑥  |       |

Subject to change

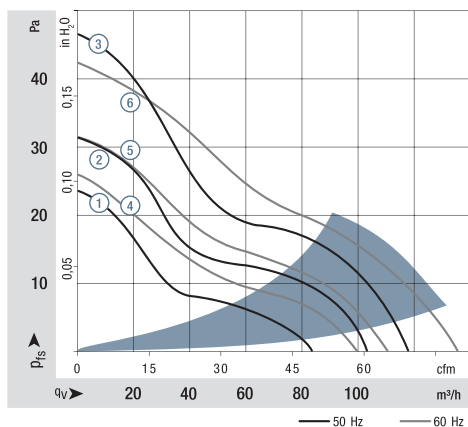

Air performance measured according to: ISO 5801.  
Installation category A, without contact protection.  
Noise: Total sound power level L<sub>WA</sub> ISO 103002 measured on a hemisphere with a radius of 2 m.  
Sound pressure level L<sub>PA</sub> measured at 1 m distance from fan axis.  
The values given are applicable only under the specified measuring conditions and may differ depending on the installation conditions.  
In the event of deviation from the standard configuration, the parameters must be checked after installation!  
For detailed information see <http://www.ebmpapst.com/general-conditions>

