




Circuit diagram

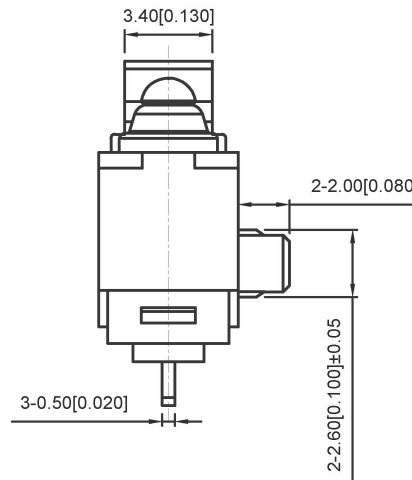

Technical Parameters

1. Electrical Rating: 0.1A 125/250VAC
3A/12VDC; 0.1A/48VDC
2. Electrical lifetime: 100 000
3. Mechanical lifetime: 100 000
4. Contact Resistance: ≤50mΩ
5. Operating force: 2.2N MAX
6. Pretravel: 3.0mm MAX
7. Withstand Voltage: Feet and Feet 500V/5S/5mA
Feet and Shell 1500/5S/5mA
8. Insulation Resistance: ≥100MΩ (Test Voltage 500VDC)
9. Proof Tracking Index (PTI): 175V
10. Ambient temperature: 40T85°
11. Operation Position: 7.1±0.5

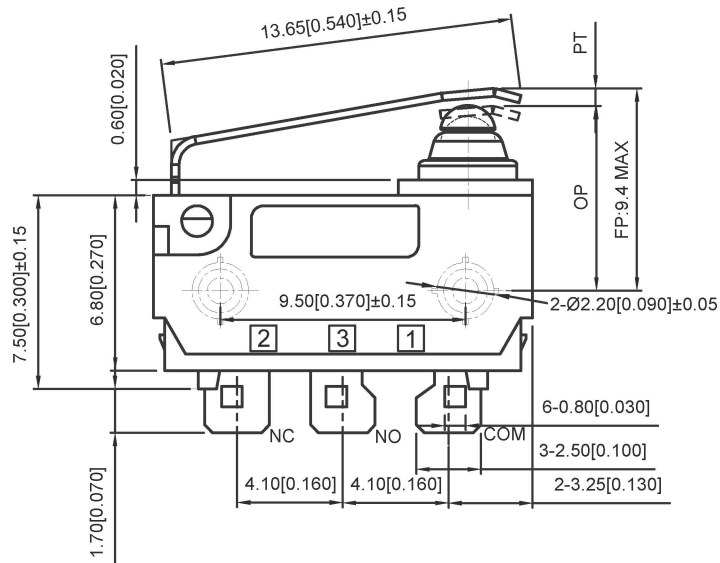

| | | |
|---|------------------------|--------------|
| 1 | Rubber shell | PA66 |
| 2 | seal ring | Silica gel |
| 3 | base | Brass+PA66 |
| 4 | According to sincerity | POM |
| 5 | Contact moving plate | C5191+AgNi10 |
| 6 | Strut | SUS301-H |

Waterproof grade: IP67

广东星坤科技股份有限公司

| | |
|------|-------|
| 生 | 日期 |
| ΔX | ΔX |
| ΔX | ΔX |
| ΔX | ΔX |
| MARK | 文件工程章 |

| | |
|------------------------|---------|
| units: | mm |
| tolerance: | |
| X.X | ±0.2mm |
| X.XX | ±0.1mm |
| X.XXX | ±0.05mm |
| UNSPECIFIED TOLERANCES | |

| | | | | |
|---------------------------------------|--|------|--|-------------|
| DSND | | DATE | | SCALE: N/A |
| DWN | | DATE | | VIEW: |
| CHKD | | DATE | | UNIT: mm/in |
| APPD | | DATE | | SIZE: A4 |
| KKB INDUSTRIAL PRECISION CO., LIMITED | | | | |

| | | |
|-------------------------|-------|----------|
| MODEL TYPE: Microswitch | | |
| PART NO.: | | |
| DWG NO.: DF1-1365UNY-1 | | |
| WEIGHT | SHEET | REVISION |
| 1.0g | 1/1 | A0 |