


## 1. Configuration & Dimensions




Series	Dimensions [mm]								
	A	B	C	D	E	F	G(ref.)	H(ref.)	I(ref.)
PS0804	8.0±0.3	10.5±0.3	3.7±0.3	2.1±0.2	2.0±0.2	6.0±0.3	5.7	2.2	2.4
PS0805	8.0±0.3	10.5±0.3	4.5±0.3	2.1±0.2	2.0±0.2	6.0±0.3	5.7	2.2	2.4
PS1003	10.1±0.3	12.7±0.3	2.7±0.3	2.4±0.2	2.5±0.2	7.6±0.3	7.3	2.8	3.0
PS3316	10.0±0.3	12.7±0.3	4.9±0.3	2.4±0.2	2.5±0.2	7.6±0.3	7.3	2.8	3.0
PS5022	14.0±0.5	18.2±0.2	6.8±0.3	2.5±0.2	2.6±0.2	13.0±0.3	12.7	2.9	3.2

## 2. Schematic Diagram

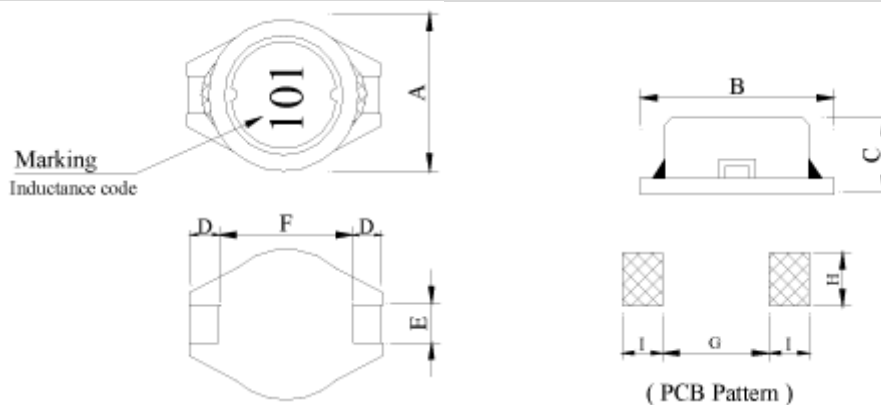


## 3. Materials

- a.- Core : Ferrite DR core
- b.- Core : Ferrite RI core
- c.- Wire : Enamelled copper wire (class F)
- d.- Base : LCP E4008
- e.- Terminal : Cu / Ni / Sn
- f.- Adhesive : Epoxy resin
- g.- Remark : Lead content 200ppm max. include ferrite

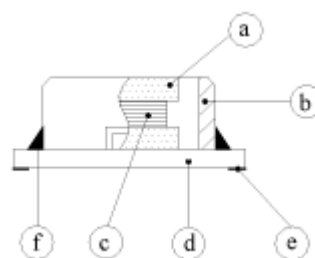

## 4. General Specification

- a.- Temp. rise : 40°C max.  
b.- Rated current : Base on temp. rise &  $\Delta L/LOA = 10\%$  max.  
c.- Storage temp.  $\left\{ \begin{array}{l} -40^{\circ}\text{C} \sim +125^{\circ}\text{C} \text{ (PS0804...PS3316)} \\ -45^{\circ}\text{C} \sim +125^{\circ}\text{C} \text{ (PS5022)} \end{array} \right.$   
d.- Operating temp. :  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
e.- Resistance to solder heat : 260°C. 10 secs

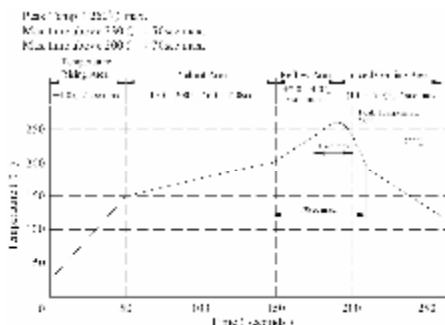

## 5. Electrical Characteristics

### PS0804 (5 $\mu\text{H}$ – 470 $\mu\text{H}$ )

DWG No.	Inductance (mH)	Q ref.	Test Freq.		SRF (MHz) nom.	RDC (W) max.	IDC (A) max.
			L (KHz)	Q (MHz)			
PS0804 – 5R0M	5.0 $\pm$ 20%	20	1	7.96	45.0	0.080	1.70
PS0804 – 7R5M	7.5 $\pm$ 20%	20	1	7.96	40.0	0.100	1.40
PS0804 – 100M	10.0 $\pm$ 20%	38	1	2.52	32.0	0.120	1.20
PS0804 – 120M	12.0 $\pm$ 20%	38	1	2.52	28.0	0.150	1.10
PS0804 – 150L	15.0 $\pm$ 15%	38	1	2.52	25.0	0.170	1.00
PS0804 – 180L	18.0 $\pm$ 15%	35	1	2.52	23.0	0.190	0.90
PS0804 – 220L	22.0 $\pm$ 15%	30	1	2.52	22.0	0.250	0.80
PS0804 – 270L	27.0 $\pm$ 15%	28	1	2.52	18.0	0.270	0.70
PS0804 – 330L	33.0 $\pm$ 15%	26	1	2.52	17.0	0.300	0.65
PS0804 – 390L	39.0 $\pm$ 15%	26	1	2.52	16.0	0.380	0.60
PS0804 – 470K	47.0 $\pm$ 10%	24	1	2.52	14.0	0.460	0.55
PS0804 – 560K	56.0 $\pm$ 10%	24	1	2.52	12.0	0.600	0.50
PS0804 – 680K	68.0 $\pm$ 10%	22	1	2.52	11.0	0.700	0.45
PS0804 – 820K	82.0 $\pm$ 10%	20	1	2.52	10.0	0.800	0.40
PS0804 – 101K	100.0 $\pm$ 10%	50	1	0.796	9.0	0.950	0.37
PS0804 – 121K	120.0 $\pm$ 10%	50	1	0.796	8.5	1.000	0.35
PS0804 – 151K	150.0 $\pm$ 10%	53	1	0.796	7.0	1.300	0.30
PS0804 – 181K	180.0 $\pm$ 10%	53	1	0.796	6.0	1.450	0.28
PS0804 – 221K	220.0 $\pm$ 10%	55	1	0.796	5.5	1.900	0.24
PS0804 – 271K	270.0 $\pm$ 10%	50	1	0.796	5.5	2.150	0.22
PS0804 – 331K	330.0 $\pm$ 10%	60	1	0.796	5.0	2.800	0.19
PS0804 – 391K	390.0 $\pm$ 10%	55	1	0.796	4.5	3.300	0.17
PS0804 – 471K	470.0 $\pm$ 10%	50	1	0.796	4.0	3.600	0.16

## PS0805 (2.2 $\mu$ H – 1000 $\mu$ H)

DWG No.	Inductance (mH)	Q ref.	Test Freq.		SRF (MHz) nom.	RDC (W) max.	IDC (A) max.
			L (KHz)	Q (MHz)			
PS0805 – 2R2M	2.2 $\pm$ 20%	18	1	7.96	75.00	0.040	2.50
PS0805 – 3R9M	3.9 $\pm$ 20%	20	1	7.96	50.00	0.055	2.10
PS0805 – 5R6M	5.6 $\pm$ 20%	20	1	7.96	40.00	0.065	1.95
PS0805 – 8R2M	8.2 $\pm$ 20%	19	1	7.96	32.00	0.080	1.75
PS0805 – 100M	10.0 $\pm$ 20%	40	1	2.52	28.00	0.100	1.50
PS0805 – 120M	12.0 $\pm$ 20%	40	1	2.52	24.00	0.120	1.40
PS0805 – 150M	15.0 $\pm$ 20%	40	1	2.52	22.00	0.140	1.30
PS0805 – 180L	18.0 $\pm$ 15%	40	1	2.52	19.00	0.160	1.20
PS0805 – 220L	22.0 $\pm$ 15%	38	1	2.52	17.00	0.180	1.00
PS0805 – 270L	27.0 $\pm$ 15%	35	1	2.52	15.50	0.200	1.10
PS0805 – 330L	33.0 $\pm$ 15%	40	1	2.52	13.50	0.240	0.92
PS0805 – 390L	39.0 $\pm$ 15%	35	1	2.52	12.00	0.260	0.84
PS0805 – 470L	47.0 $\pm$ 15%	32	1	2.52	10.50	0.280	0.75
PS0805 – 560K	56.0 $\pm$ 10%	30	1	2.52	9.50	0.380	0.68
PS0805 – 680K	68.0 $\pm$ 10%	28	1	2.52	9.00	0.440	0.60
PS0805 – 820K	82.0 $\pm$ 10%	28	1	2.52	8.50	0.550	0.54
PS0805 – 101K	100.0 $\pm$ 10%	45	1	0.796	7.50	0.600	0.50
PS0805 – 121K	120.0 $\pm$ 10%	42	1	0.796	7.00	0.750	0.45
PS0805 – 151K	150.0 $\pm$ 10%	39	1	0.796	6.50	0.900	0.40
PS0805 – 181K	180.0 $\pm$ 10%	41	1	0.796	4.80	1.050	0.35
PS0805 – 221K	220.0 $\pm$ 10%	38	1	0.796	4.50	1.180	0.30
PS0805 – 271K	270.0 $\pm$ 10%	37	1	0.796	4.20	1.400	0.27
PS0805 – 331K	330.0 $\pm$ 10%	36	1	0.796	3.80	1.800	0.24
PS0805 – 471K	470.0 $\pm$ 10%	34	1	0.796	3.50	2.250	0.20
PS0805 – 561K	560.0 $\pm$ 10%	32	1	0.796	3.00	3.000	0.18
PS0805 – 681K	680.0 $\pm$ 10%	32	1	0.796	2.80	3.400	0.17
PS0805 – 821K	820.0 $\pm$ 10%	35	1	0.796	2.50	4.000	0.16
PS0805 – 102K	1000.0 $\pm$ 10%	35	1	0.252	2.20	5.000	0.15

## PS1003 (1.8 $\mu$ H - 470 $\mu$ H)

DWG No.	Inductance (mH)	Q ref.	Test Freq.		RDC (W) max.	I <sub>rms</sub> (A) $\Delta T=40^{\circ}C$ max.	I <sub>sat</sub> (A) $\Delta L/LOA=10\%$ max.
			L (KHz)	Q (MHz)			
PS1003 - 1R8M	1.8 $\pm$ 20%	10	1	7.96	0.038	3.00	3.60
PS1003 - 2R2M	2.2 $\pm$ 20%	11	1	7.96	0.045	2.76	3.40
PS1003 - 3R0M	3.0 $\pm$ 20%	11	1	7.96	0.062	2.20	2.60
PS1003 - 3R9M	3.9 $\pm$ 20%	10	1	7.96	0.070	2.10	2.40
PS1003 - 4R7M	4.7 $\pm$ 20%	10	1	7.96	0.078	1.90	2.30
PS1003 - 7R5M	7.5 $\pm$ 20%	10	1	7.96	0.100	1.44	1.70
PS1003 - 100M	10.0 $\pm$ 20%	18	1	2.52	0.145	1.24	1.50
PS1003 - 120M	12.0 $\pm$ 20%	20	1	2.52	0.185	1.10	1.30
PS1003 - 150M	15.0 $\pm$ 20%	20	1	2.52	0.200	1.02	1.20
PS1003 - 180M	18.0 $\pm$ 20%	20	1	2.52	0.270	0.90	1.10
PS1003 - 220M	22.0 $\pm$ 20%	17	1	2.52	0.300	0.80	1.00
PS1003 - 270M	27.0 $\pm$ 20%	17	1	2.52	0.400	0.75	0.90
PS1003 - 330M	33.0 $\pm$ 20%	17	1	2.52	0.450	0.70	0.85
PS1003 - 390M	39.0 $\pm$ 20%	18	1	2.52	0.560	0.65	0.80
PS1003 - 470M	47.0 $\pm$ 20%	18	1	2.52	0.650	0.60	0.72
PS1003 - 560M	56.0 $\pm$ 20%	15	1	2.52	0.680	0.52	0.65
PS1003 - 680M	68.0 $\pm$ 20%	15	1	2.52	0.800	0.48	0.58
PS1003 - 820M	82.0 $\pm$ 20%	20	1	2.52	1.200	0.42	0.52
PS1003 - 101M	100.0 $\pm$ 20%	23	1	0.796	1.400	0.40	0.48
PS1003 - 121M	120.0 $\pm$ 20%	22	1	0.796	1.520	0.35	0.44
PS1003 - 151M	150.0 $\pm$ 20%	23	1	0.796	1.800	0.32	0.40
PS1003 - 181M	180.0 $\pm$ 20%	20	1	0.796	2.200	0.28	0.35
PS1003 - 221M	220.0 $\pm$ 20%	20	1	0.796	2.200	0.26	0.32
PS1003 - 271L	270.0 $\pm$ 15%	26	1	0.796	3.100	0.22	0.28
PS1003 - 331L	330.0 $\pm$ 15%	26	1	0.796	3.600	0.20	0.26
PS1003 - 391L	390.0 $\pm$ 15%	28	1	0.796	4.600	0.18	0.22
PS1003 - 471L	470.0 $\pm$ 15%	28	1	0.796	5.100	0.16	0.20

## PS3316=PS1005 (1 $\mu$ H - 3300 $\mu$ H)

DWG No.	Inductance (mH)	Q ref.	Test Freq.		SRF (MHz) nom.	RDC (W) max.	IDC (A) max.
			L (KHz)	Q (MHz)			
PS3316 - 1R0M	1.0 $\pm$ 20%	25	1	7.96	120.0	0.017	4.50
PS3316 - 1R5M	1.5 $\pm$ 20%	25	1	7.96	100.0	0.020	3.60
PS3316 - 2R2M	2.2 $\pm$ 20%	25	1	7.96	90.0	0.027	3.10
PS3316 - 3R0M	3.0 $\pm$ 20%	25	1	7.96	80.0	0.030	2.90
PS3316 - 4R7M	4.7 $\pm$ 20%	25	1	7.96	50.0	0.040	2.50
PS3316 - 7R0M	7.0 $\pm$ 20%	22	1	7.96	32.0	0.055	2.20
PS3316 - 100M	10.0 $\pm$ 20%	48	1	2.52	30.0	0.065	2.00
PS3316 - 120M	12.0 $\pm$ 20%	45	1	2.52	25.0	0.080	1.80
PS3316 - 150M	15.0 $\pm$ 20%	40	1	2.52	20.0	0.085	1.70
PS3316 - 180L	18.0 $\pm$ 15%	35	1	2.52	19.0	0.090	1.60
PS3316 - 220L	22.0 $\pm$ 15%	42	1	2.52	18.0	0.100	1.40
PS3316 - 270L	27.0 $\pm$ 15%	40	1	2.52	17.0	0.120	1.30
PS3316 - 330L	33.0 $\pm$ 15%	40	1	2.52	15.0	0.160	1.20
PS3316 - 390L	39.0 $\pm$ 15%	40	1	2.52	13.0	0.180	1.05
PS3316 - 470L	47.0 $\pm$ 15%	35	1	2.52	12.0	0.190	1.00
PS3316 - 560L	56.0 $\pm$ 15%	35	1	2.52	11.0	0.210	0.90
PS3316 - 680L	68.0 $\pm$ 15%	35	1	2.52	9.0	0.340	0.82
PS3316 - 820L	82.0 $\pm$ 15%	35	1	2.52	8.0	0.380	0.75
PS3316 - 101K	100.0 $\pm$ 10%	35	1	0.796	7.5	0.420	0.68
PS3316 - 121K	120.0 $\pm$ 10%	30	1	0.796	7.2	0.460	0.60
PS3316 - 151K	150.0 $\pm$ 10%	28	1	0.796	6.2	0.520	0.55
PS3316 - 181K	180.0 $\pm$ 10%	28	1	0.796	5.8	0.700	0.50
PS3316 - 221K	220.0 $\pm$ 10%	30	1	0.796	5.2	0.800	0.45
PS3316 - 271K	270.0 $\pm$ 10%	30	1	0.796	4.8	1.100	0.40
PS3316 - 331K	330.0 $\pm$ 10%	30	1	0.796	4.5	1.200	0.35
PS3316 - 391K	390.0 $\pm$ 10%	25	1	0.796	4.2	1.400	0.33
PS3316 - 471K	470.0 $\pm$ 10%	40	1	0.796	3.0	1.600	0.30
PS3316 - 561K	560.0 $\pm$ 10%	40	1	0.796	2.7	1.800	0.28
PS3316 - 681K	680.0 $\pm$ 10%	37	1	0.796	2.6	2.300	0.26
PS3316 - 821K	820.0 $\pm$ 10%	37	1	0.796	2.5	2.600	0.24
PS3316 - 102K	1000.0 $\pm$ 10%	65	1	0.252	2.0	3.200	0.22
PS3316 - 122K	1200.0 $\pm$ 10%	58	1	0.252	2.0	3.600	0.20
PS3316 - 152K	1500.0 $\pm$ 10%	53	1	0.252	1.6	5.200	0.17
PS3316 - 182K	1800.0 $\pm$ 10%	65	1	0.252	1.4	5.700	0.16
PS3316 - 222K	2200.0 $\pm$ 10%	55	1	0.252	1.4	6.500	0.14
PS3316 - 272K	2700.0 $\pm$ 10%	55	1	0.252	1.2	8.600	0.12

PS3316 - 332K	3300.0±10%	50	1	0.252	1.2	10.000	0.10
---------------	------------	----	---	-------	-----	--------	------

### PS5022 (10µH - 1000µH)


DWG No.	Inductance (mH)	Q ref.	Test Freq.		SRF (MHz) typ.	RDC (Ω) max.	I <sub>rms</sub> (A) ΔT=40°C typ.	I <sub>sat</sub> (A) ΔL/LOA=10% typ.
			L (KHz)	Q (MHz)				
PS5022 - 100M	10.0±20%	56	100	2.52	19.0	0.040	4.00	8.20
PS5022 - 150M	15.0±20%	53	100	2.52	17.5	0.052	3.60	7.20
PS5022 - 220M	22.0±20%	51	100	2.52	16.0	0.070	3.00	6.20
PS5022 - 330M	33.0±20%	44	100	2.52	10.0	0.100	2.50	5.00
PS5022 - 470M	47.0±20%	40	100	2.52	8.0	0.130	2.00	4.20
PS5022 - 680M	68.0±20%	37	100	2.52	6.0	0.200	1.60	3.40
PS5022 - 101M	100.0±20%	40	100	0.796	4.6	0.320	1.30	2.60
PS5022 - 151M	150.0±20%	39	100	0.796	4.3	0.500	1.05	2.30
PS5022 - 221M	220.0±20%	29	100	0.796	3.5	0.600	1.00	1.90
PS5022 - 331M	330.0±20%	30	100	0.796	3.0	0.920	0.80	1.40
PS5022 - 471M	470.0±20%	27	100	0.796	2.4	1.150	0.64	1.30
PS5022 - 681M	680.0±20%	19	100	0.796	2.1	1.700	0.54	1.10
PS5022 - 102M	1000.0±20%	46	100	0.252	1.5	2.450	0.45	0.90

C/Severo Ochoa 33 – Parque Tecnológico de Andalucía. 29590 Campanillas .Málaga (Spain) Phone +34 951 231 320 Fax +34 951 231 321  
E-mail: [mar.villarrubia@grupopremo.com](mailto:mar.villarrubia@grupopremo.com) Web <http://www.grupopremo.com>


## 6. Curve

### Inductance VS. DC Current Curve


PS0804

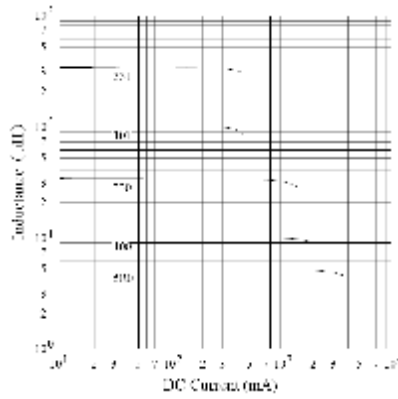


PS0805

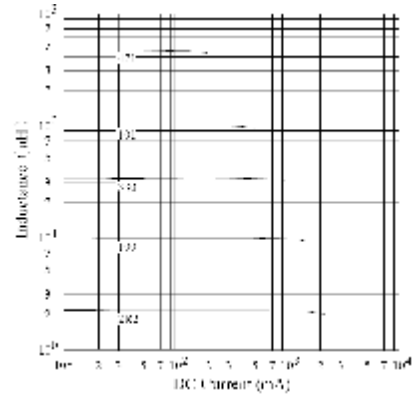


PS1003

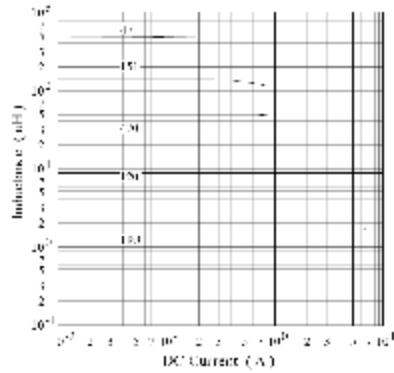

PS3316 =  
PS1005

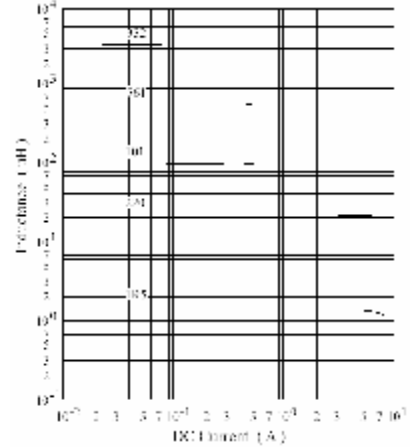


PS5022

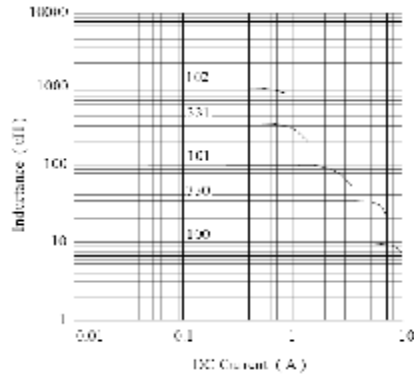

C/Severo Ochoa 33 - Parque Tecnológico de Andalucía. 29590 Campanillas .Málaga (Spain) Phone +34 951 231 320 Fax +34 951 231 321  
E-mail: [mar.villarrubia@grupopremo.com](mailto:mar.villarrubia@grupopremo.com) Web <http://www.grupopremo.com>

## 7. Packaging Information

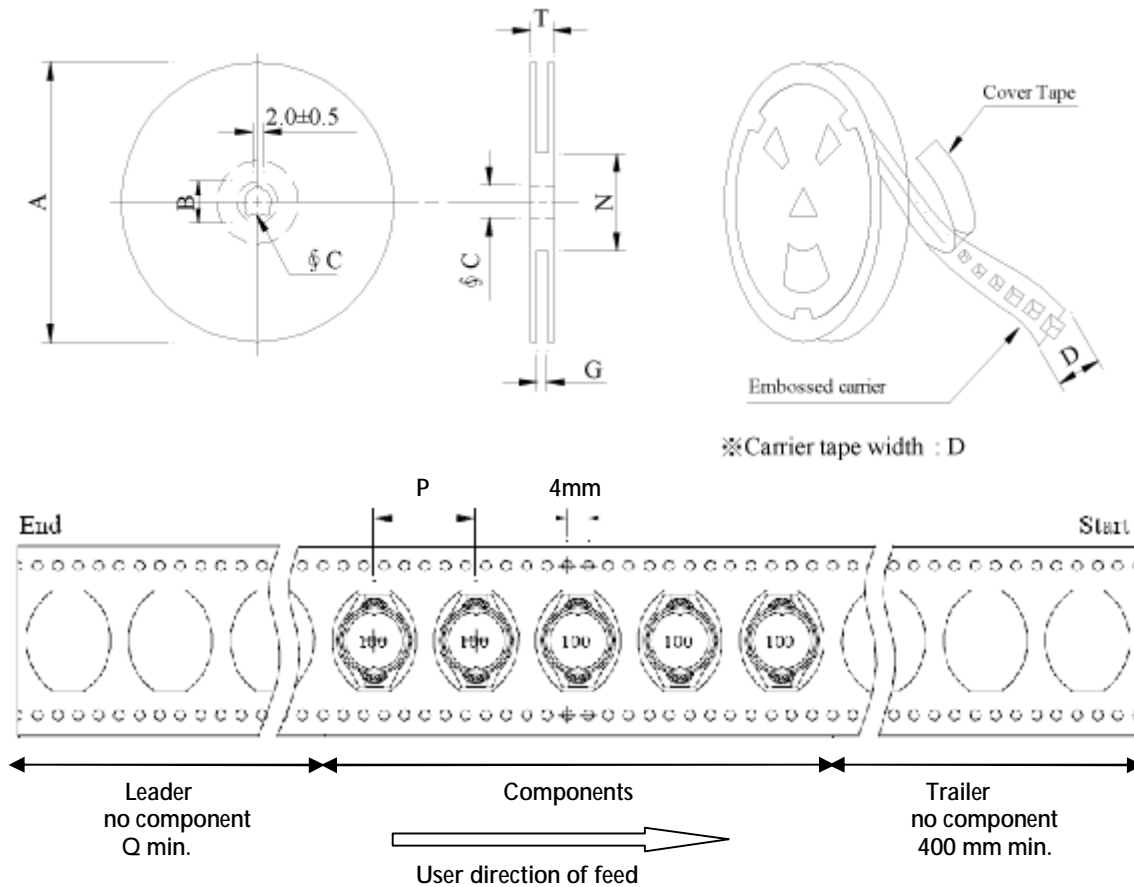

(PS0804, PS0805 à P = 12mm) (PS1003, PS3316 à P = 16mm) (PS5022 à P = 20mm)  
(PS0804, PS0805, PS1003, PS3316 à Q = 200mm) (PS5022 à Q = 160mm)

### PS0804 & PS0805

Style	Dimensions [mm]						
	A	B	C	D	G	N	T
13 - 16	330	21±0.8	13	16	18 <sup>+0</sup>	50 <sup>0</sup>	22.4

### PS1003 & PS3316=PS1005

Style	Dimensions [mm]						
	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13	24	26 <sup>+0</sup>	50 <sup>0</sup>	30.4




C/Severo Ochoa 33 - Parque Tecnológico de Andalucía. 29590 Campanillas .Málaga (Spain) Phone +34 951 231 320 Fax +34 951 231 321  
E-mail: [mar.villarrubia@grupopremo.com](mailto:mar.villarrubia@grupopremo.com) Web <http://www.grupopremo.com>

## PS5022

Style	Dimensions [mm]						
	A	B	C	D	G	N	T
13 - 32	330	21±0.8	13±0.5	32	26 <sup>+0</sup>	50 <sup>0</sup>	38.4

Series	Inner : Reel			Outer : Carton		
	Q'TY(pcs)	G.W.(gw)	Style	Q'TY(pcs)	G.W.(Kg)	Size(cm)
PS0804	1,000	1,100	13 - 16	6,000	7.5	40 x 40 x 24
PS0805	1,000	1,100	13 - 16	6,000	8.0	40 x 40 x 24
PS1003	1,000	1,000	13 - 24	4,000	6.2	40 x 40 x 24
PS3316	600	1,100	13 - 24	2,400	6.6	40 x 40 x 24
PS5022	250	1,250	13 - 32	1,000	6.8	40 x 40 x 24

## 8. Labelling

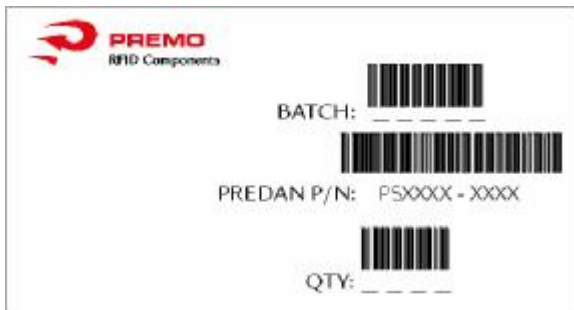

## 9. Reliability Test

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered with fresh solder	Preheat : 150±25% for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C (PS0804,PS0805,PS1003,PS3316) 260±5°C (PS5022) Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table border="0"> <tr> <td>Room temp. 15 minutes</td> <td>→</td> <td>-25±2°C 30 minutes</td> </tr> <tr> <td>Room temp. 15 minutes</td> <td>→</td> <td>85±2°C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-25±2°C 30 minutes	Room temp. 15 minutes	→	85±2°C 30 minutes
Room temp. 15 minutes		→	-25±2°C 30 minutes					
Room temp. 15 minutes		→	85±2°C 30 minutes					
Humidity Resistance test	Temperature : 40±2°C Humidity : 90 ~ 95% Applied current : Per specifications Time : 500 hours							
High temp. Resistance test	Temperature : 105±2°C Applied current : Per specifications Time : 500 hours							

## 10. Edition Control

Edition	Date	Change description	Made by
1 <sup>st</sup>	31/08/06	Update Specification	Pablo Pozo