



HSF

NOTES:

Current Rating: 1.0AMP Δ
 Contact Resistance: 20m Ω Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000M Ω Min
 Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE \pm 0.05)

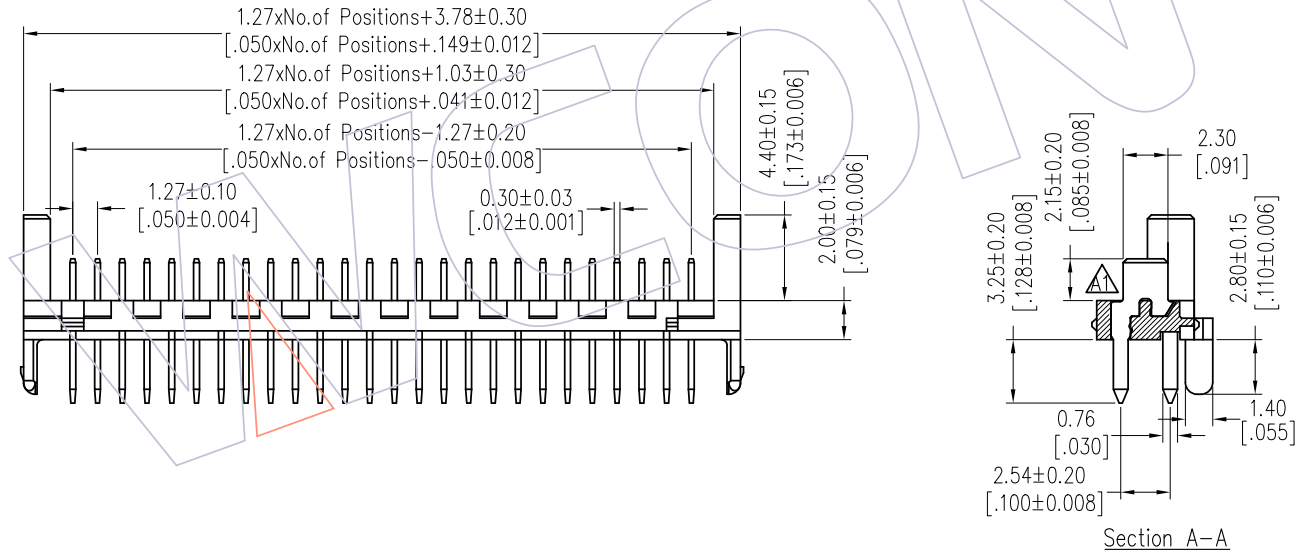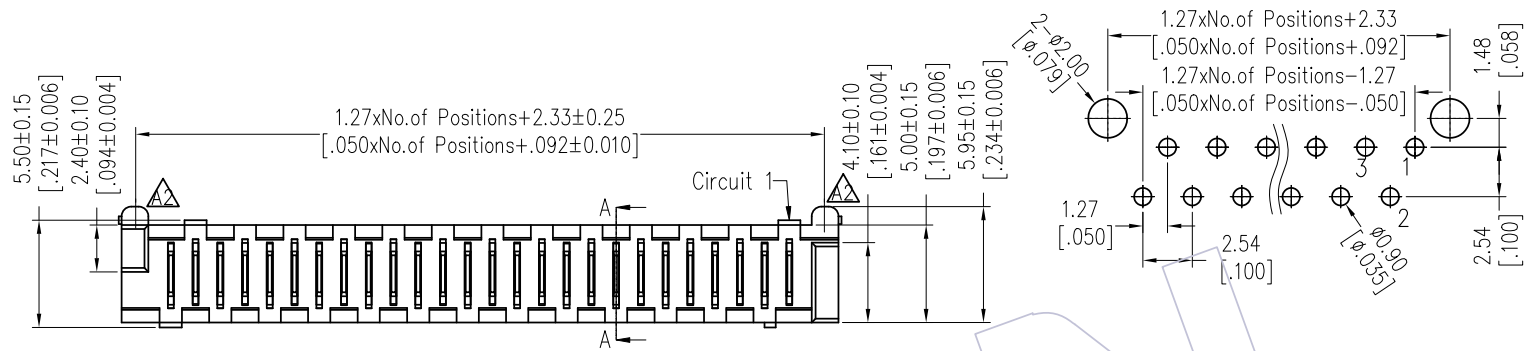

Ordering Information

3901-XX MS XX D W B X 1

No. of Pins	Contact Plating	Insulator	Color	Packing
04 16	SM=Matte Tin	D=LCP	B=Black	T=Tube
06 18	SN=Tin			
08 20				
10 22				
12 24				
14 26				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	PART NO.	TITLE:	Customer NO.
A3	2018/05/15	Picoflex Connector--1.27mm SPC Connector	Δ	OPERATION		DRAW	DATE	SCALE	FIT	3901-XXMSXXDWBX1		
A2	2013/12/26	Modify the drawing	Δ	x.x	\pm 0.40	Ding	2018/05/15	UNIT	mm			
A1	2013/08/16	Modify the drawing	Δ	x.xx	\pm 0.25	CHECK	DATE	SIZE	A4			
A0	2012/11/01	NEW	----	x.xxx	\pm 0.15		DATE	SHEET	1/1			
				Angle	\pm 3'	APPROVE	DATE	PROJ.	ϕ			



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--