
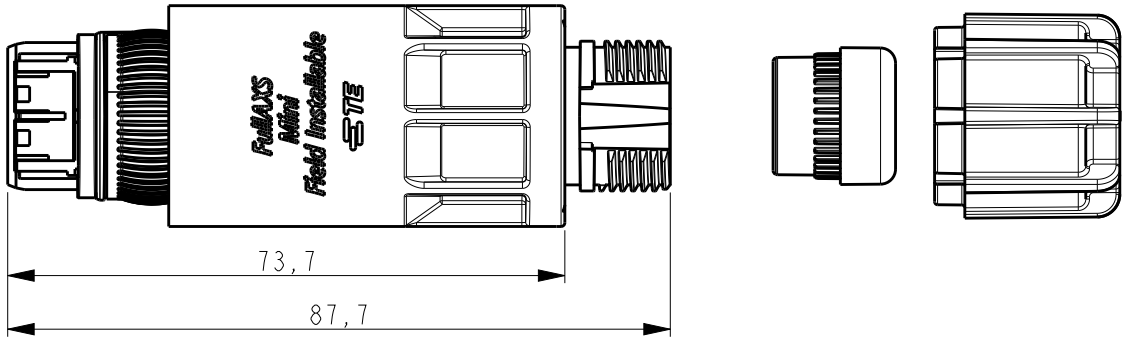
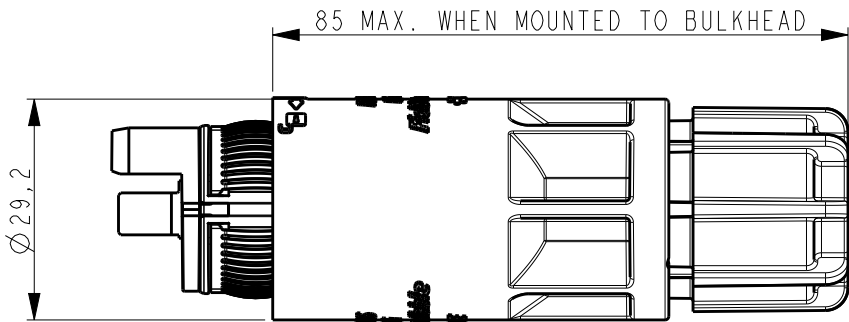


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	02NOV2016	KZ	RS

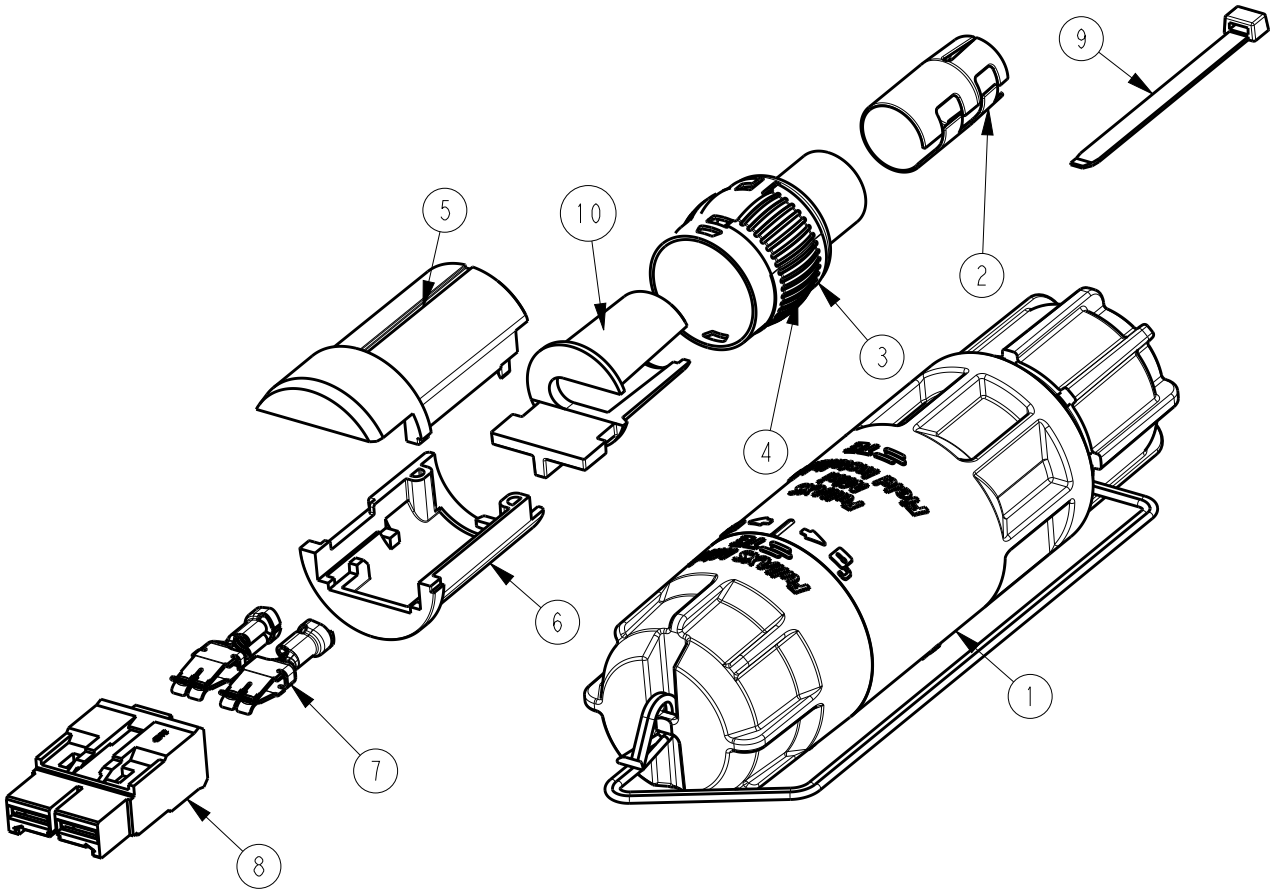

TE Part Number	Cable Diameter
2061933-1	7.3 - 9.0 mm

NOTES:

1. THIS FullPOWER FIELD INSTALL ASSEMBLY KIT SHOULD BE USED WITH RUGGEDIZED CABLE AND RUGGED FAN-OUT CONSTRUCTION NO 900 MICRON TERMINATIONS TO BE USED
2. CABLE DIAMETER RANGE: SEE TABLE
3. THE FLAMMABILITY RATING OF THE MATERIAL IS UL94-V0
4. THE MATERIAL IS HALOGEN FREE ACCORDING IEC 60754-2
5. AN INSTRUCTION SHEET IS PACKED WITH EACH FIELD INSTALL KIT

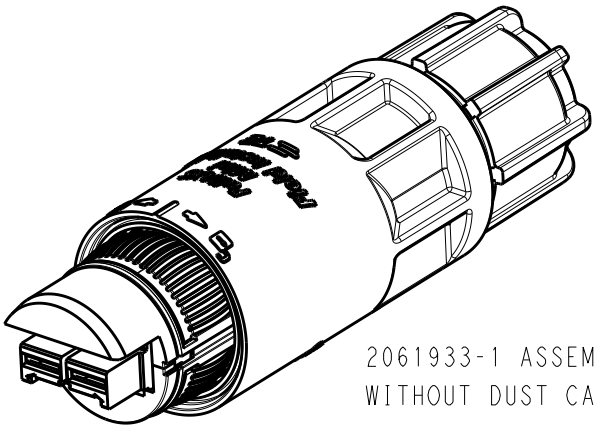


2061933-1 ASSEMBLED
WITHOUT DUST CAP

10	Spacer	1
9	Cable Tie	1
8	FullPOWER ET Power Housing	1
7	FullPOWER ET Power Timer Contact	3
6	FullPOWER Alignment Adapter Bottom	1
5	FullPOWER Alignment Adapter Top	1
4	FullPOWER Outer Ferrule	1
3	FullPOWER Ferrule spring	1
2	FullPOWER Inner Ferrule	1
1	FullPOWER MINI Field Install Sub-Assembly	1
Item	Description	Qty

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±0,2
1 PLC	±0,1
2 PLC	±0,05
3 PLC	±0,025
4 PLC	±0,005
ANGLES	±2°

FINISH

DWN 09FEB2015

R. COOLEN

CHK

-

APVD

S. BORGAS

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME
FullPOWER
MINI FIELD INSTALL ASSEMBLY KIT

SIZE

A3

CAGE CODE

-

DRAWING NO

©-2061933

RESTRICTED TO

-

SCALE 1:1

SHEET 1 OF 1

REV A