

环保物料

TEL:0769-82001899

SPECIFICATIONS

- 1.Voltage rating: 150V AC, DC
- 2.Current rating: 1A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:500M Ω min
- 5.Temperature range: -25 ° C-+85 ° C
- 6.Contact resistance: 30m Ω max

HOUSING

Housing Material:Nylon66 UL94V-0(2)

Accepts :T1255 terminal







Mates with: M1255 series header

Poles : 02-30P

Part No.: P1255-xx-N0

Pin位数

PIN	DIM. (mm)		
	A	B	C
02	1.25	4.35	
03	2.50	5.60	1.25
04	3.75	6.85	2.50
05	5.00	8.10	3.75
06	6.25	9.35	5.00
07	7.50	10.60	6.25
08	8.75	11.85	7.50
09	10.00	13.10	8.75
10	11.25	14.35	10.00
11	12.50	15.60	11.25
12	13.75	16.85	12.50
13	15.00	18.10	13.75
14	16.25	19.35	15.00
15	17.50	20.60	16.25
20	23.75	26.85	22.50
25	30.00	33.10	28.75
30	36.25	39.35	35.00

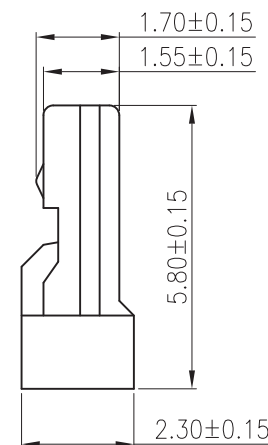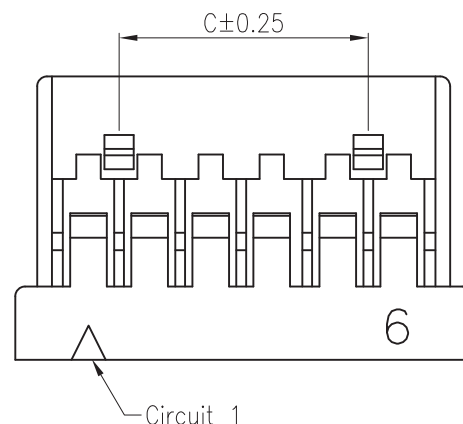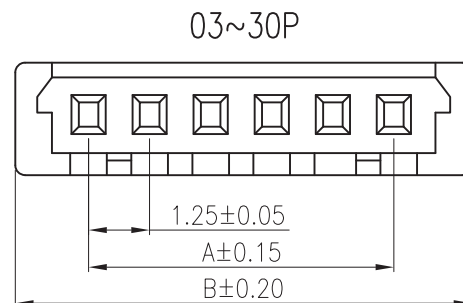

				TOLERANCE UNLESS OTHERWISE			DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.	SHEET	1/1			
				X.	±0.30	X°	±5°	CHKD			DATE	2010.4.12		
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.25mm Crimp Style Connectors	UNITS	mm		
				.XX	±0.08	.XX°	±1°				SCALE	1:1		
A0				.XXX	±0.03	.XXX°	±0.5°	VIEW		PART. NO.	P1255-xx-N0	DWG NO.	009	
VER	MODIFICATION			DRAW	DATE									