

Fig. 1

- Series 380 & 480 use MM #8000 pins. See page 183 for details.
- Series 329 & 429 use MM #2954 pin receptacles and accept pin diameters from 0,38 - 0,64. See page 142 for details.
- Series 329 & 429 receptacles use Hi-Rel, 4 finger BeCu #30 contacts rated at 3 amps. See page 218 for details.
- Solder cups are pre-aligned.
- Insulators are high temp. thermoplastic.

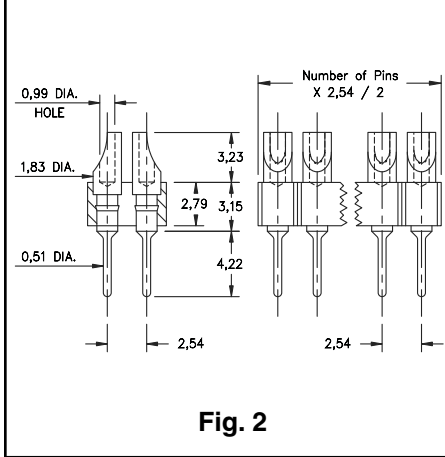
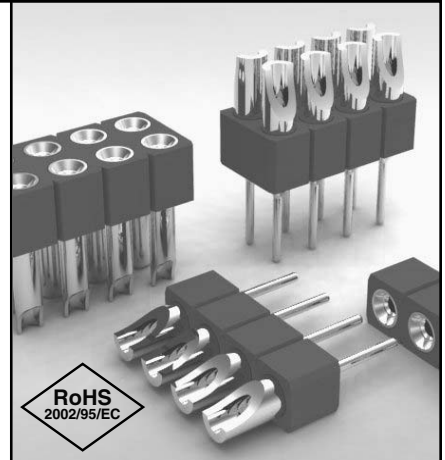


Fig. 2

Ordering Information	
Fig. 1	Series 380...001 Solder Cup / Solder Tail 380-XX-1 _ _ -00-001000 Specify # of pins → 01-64
	Series 480...001 Solder Cup / Solder Tail 480-10-2 _ _ -00-001000 Specify # of pins → 02-64

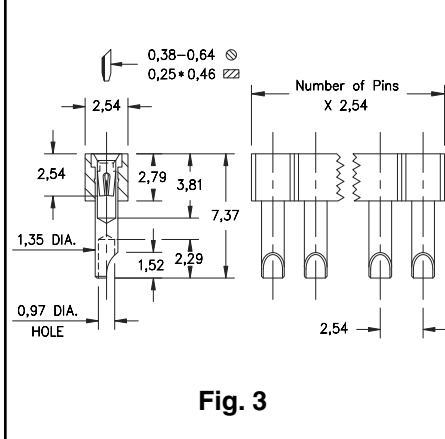


Fig. 3

<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		XX=Plating Code See Below		<i>For RoHS compliance select ◇ plating code.</i>	
SPECIFY PLATING CODE XX=		10 ◇	90 ◇	40 ◇	
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

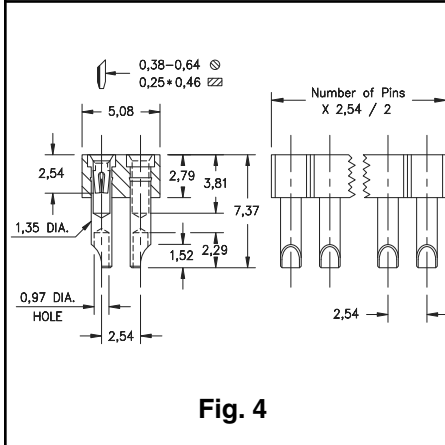


Fig. 4

Ordering Information	
Fig. 4	Series 329...540 Solder Cup Sockets 329-43-1 _ _ -41-540000 Specify # of pins → 01-64
	Series 429...540 Solder Cup Sockets 429-43-2 _ _ -41-540000 Specify # of pins → 02-64

<i>For Electrical, Mechanical & Environmental Data, See pg. 4</i>		<i>For RoHS compliance select ◇ plating code.</i>			
PLATING CODE =			43 ◇		
Sleeve (Pin)			5,08µm Sn		
Contact (Clip)			0,76µm Au		