



Features (R·V·M-PVF series)

- For AC100V line.
- Easy installation with P4 fuse connector terminal
- Green indicator tell you when to change it.

Applications



- Various AC power supplies input side.

Features (R·V·M-BUZ-2 series)

- For AC200V Three-Phase.
- Good for machinery power supplies.



Dimensions

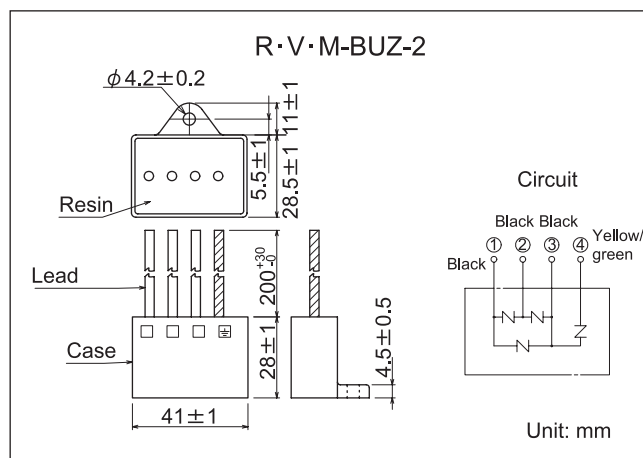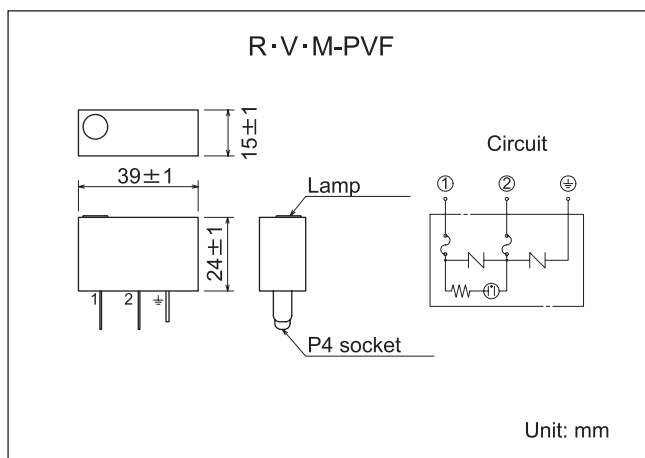

Electrical Specifications

Model Number	Terminal Number	Clamp Voltage V ± 10%	Peak Surge Current 8/20μs(A)	Peak Surge Voltage 1.2/50μs(A)	Response Time	Capacitance (pF) Max.	Max. Line Voltage (Vrms)	Weight (g)	Operating Temp. range (°C)
R·V·M-411·821PVF	1-2	416	1000	10K	50	190	125	13	-20 ~ +50
	2- 	820	1000	10K		100			
R·V·M-431·821BUZ-2	1-2-3	430	2500	12K		540	250	42	-20 ~ +70
	1-2- 	1250				170			
	3- 	820				230			