


|                       |                                    |                                                                                                                            |
|-----------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Frame                 | Aluminum Die-cast                  | Notes                                                                                                                      |
| Impeller              | Metal alloy                        | Date: 050113                                                                                                               |
| Connection *          | Lead wires or Terminal             | Environmental Protection: IP56                                                                                             |
| Motor                 | AC Shaded pole, Thermal protection | Storage Temp: -40C ~ +100C                                                                                                 |
| Bearing System        | Dual Ball bearing                  | Weight: 1700g (3.75 lbs)                                                                                                   |
| Insulation Resistance | >100MOhm at 500VDC                 | Available AC voltages by special order: 12, 24, 28, 38, 42, 48, 440, 480. Dual speed also available. Call for information. |
| Dielectric Strength   | > 60 seconds at 1500VAC            |                                                                                                                            |
| Operating Temp Range  | -30C ~ +80C (non-condensing)       | * Specify configuration: TB = Terminal, Ball bearing; WB = Wire leads, Ball bearing                                        |
| Life Expectancy       | 50000 hours (55C)                  |                                                                                                                            |

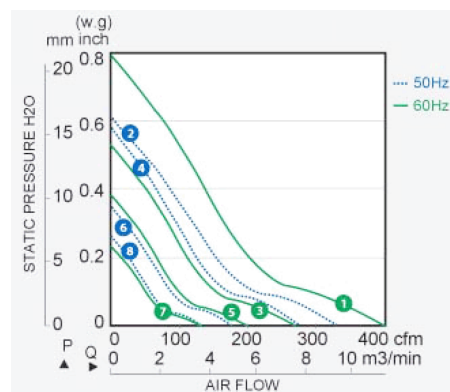

| Model No.            | Speed (RPM) | Airflow (CFM) | Noise | Volts AC | Voltage Range AC | Watts | Max. Static Pressure ("H <sub>2</sub> O) | Curves   |
|----------------------|-------------|---------------|-------|----------|------------------|-------|------------------------------------------|----------|
| OA180ANL-11-1 * 1856 | 2750        | 330           | 65    | 115      | 100 ~ 120        | 60    | 0.60                                     | 2 (50Hz) |
|                      | 3250        | 400           |       |          |                  |       | 0.80                                     | 1 (60Hz) |
| OA180ANL-11-2 * 1856 | 2300        | 275           | 53    | 115      | 100 ~ 120        | 55    | 0.58                                     | 4 (50Hz) |
|                      | 2200        | 265           |       |          |                  |       | 0.52                                     | 3 (60Hz) |
| OA180ANL-11-3 * 1856 | 1500        | 185           | 42    | 115      | 100 ~ 120        | 20    | 0.38                                     | 6 (50Hz) |
|                      | 1600        | 200           |       |          |                  |       | 0.32                                     | 5 (60Hz) |
| OA180ANL-22-1 * 1856 | 2750        | 330           | 65    | 230      | 200 ~ 240        | 60    | 0.60                                     | 2 (50Hz) |
|                      | 3250        | 400           |       |          |                  |       | 0.80                                     | 1 (60Hz) |
| OA180ANL-22-2 * 1856 | 2300        | 275           | 53    | 230      | 200 ~ 240        | 55    | 0.58                                     | 4 (50Hz) |
|                      | 2200        | 265           |       |          |                  |       | 0.52                                     | 3 (60Hz) |
| OA180ANL-22-3 * 1856 | 1500        | 185           | 42    | 230      | 200 ~ 240        | 20    | 0.38                                     | 6 (50Hz) |
|                      | 1600        | 200           |       |          |                  |       | 0.32                                     | 5 (60Hz) |