


UF400AAA series



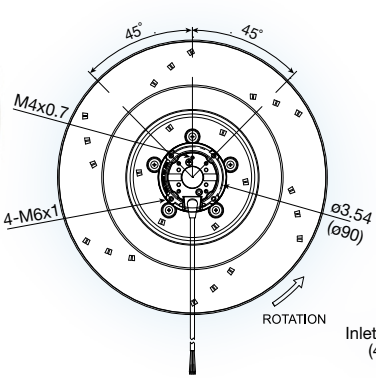

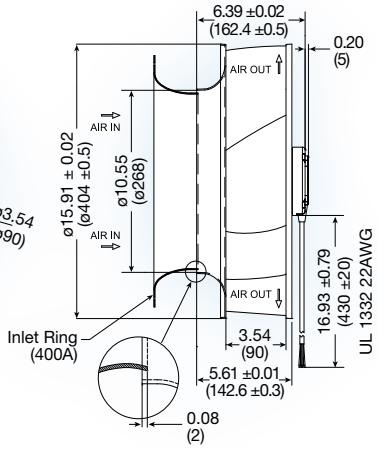

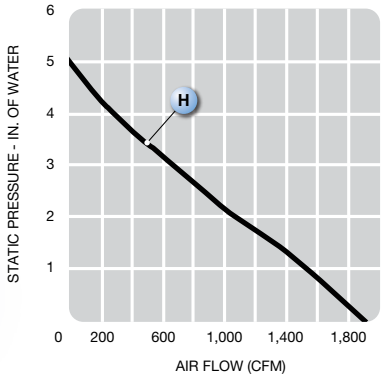

(400 dia. x 162.4 mm)

15.75 dia. x 6.39 inches

Features:	**backward curved impeller**
Operating voltage:	230 VAC
Operating temp.	-20° ~ 50°C
Construction:	aluminum die cast motor base, aluminum impeller
Bearing option:	ball bearing
Motor:	permanent split capacitor required capacitor included
Air Flow:	centrifugal
Connection:	AWM 2517 lead wires
Protection:	thermal

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF400AA23-H1C4A	230	50	287	1.26	1.70	1,250	53.8	1900	136.7	5.38	73	5.45