

# RS3A-B THRU RS3M-B

## 3.0A Surface Mount Fast Recovery Rectifiers-50-1000V

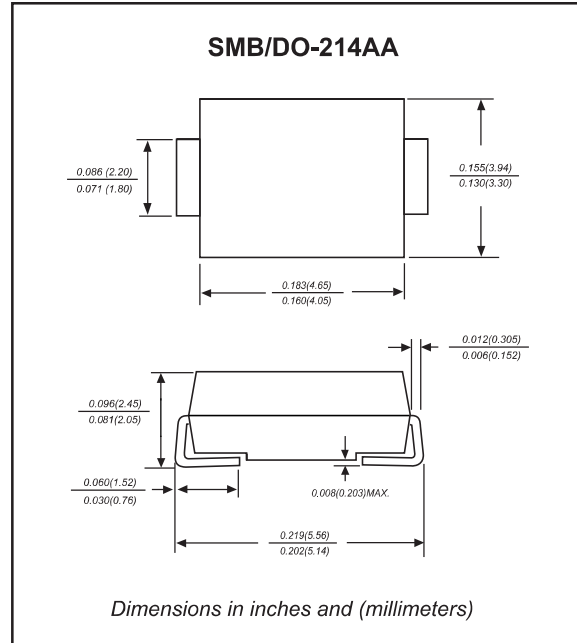
### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals
- ◆ Glass passivated chip junction
- ◆ Compliant to RoHS Directive 2011/65/EU
- ◆ Suffix "-H" indicates Halogen-free part, ex. RS3M-B-H

### Mechanical data

- ◆ **Case:** JEDEC DO-214AA molded plastic body
- ◆ **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any

### Package outline



### Maximum ratings and Electrical Characteristics (AT T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.2	I <sub>O</sub>			3.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC methode)	I <sub>FSM</sub>			80	A
Reverse current	V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 25°C	I <sub>R</sub>			5.0	μA
	V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 100°C				50	
Thermal resistance	Junction to ambient NOTE 1	R <sub>θJA</sub>		50		°C/W
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C <sub>J</sub>		60		pF
Storage temperature		T <sub>STG</sub>	-65		+150	°C

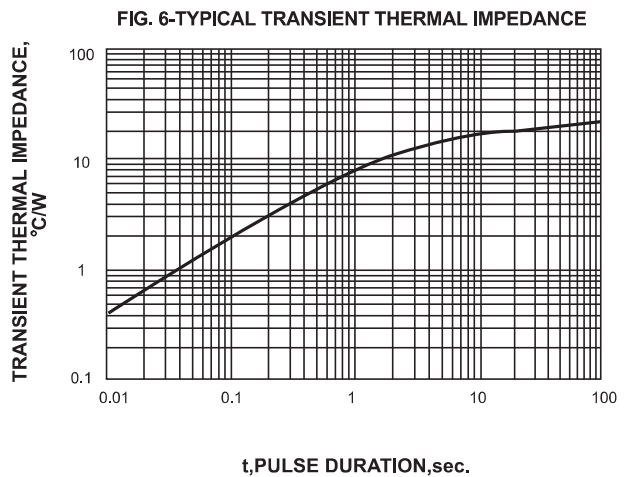
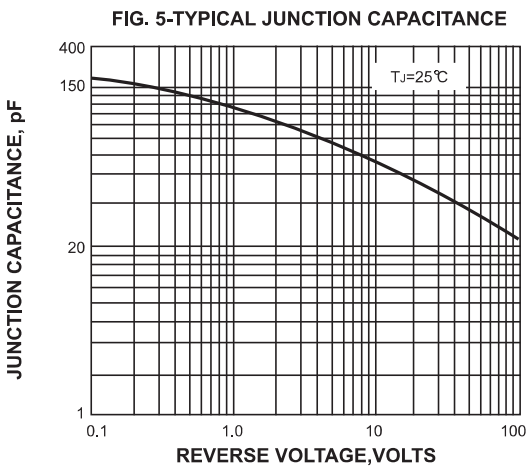
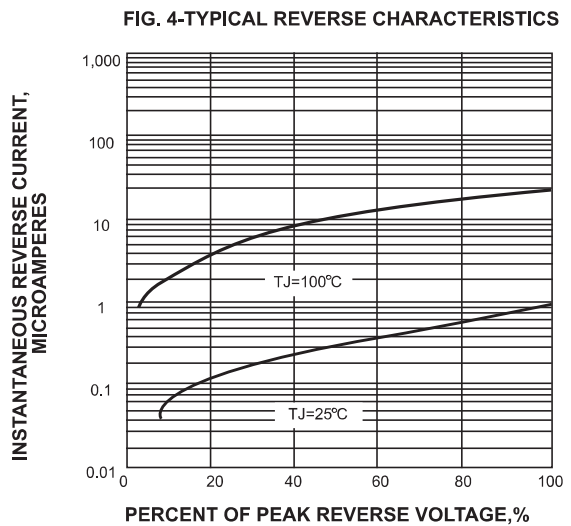
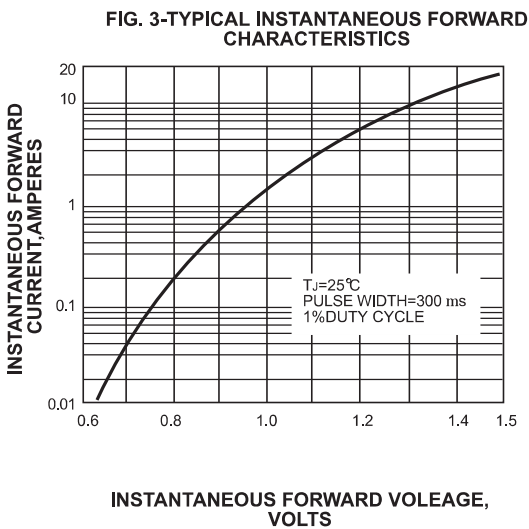
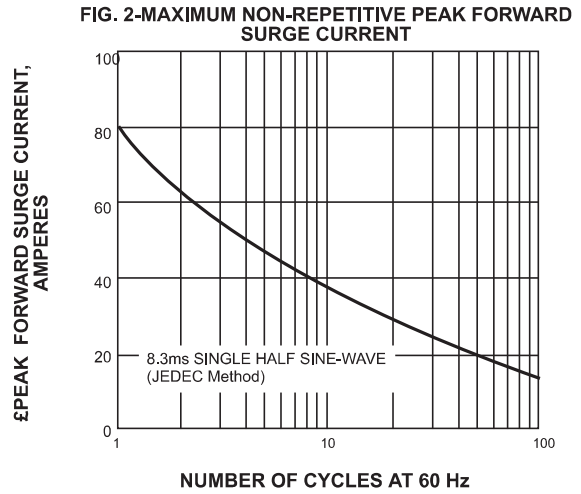
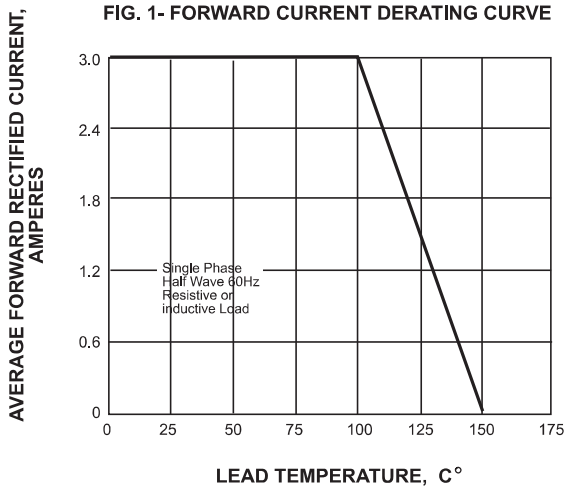
SYMBOLS	V <sub>RRM</sub> <sup>*1</sup> (V)	V <sub>RMS</sub> <sup>*2</sup> (V)	V <sub>R</sub> <sup>*3</sup> (V)	V <sub>F</sub> <sup>*4</sup> (V)	t <sub>rr</sub> <sup>*5</sup> (ns)	Operating temperature T <sub>J</sub> (°C)
RS3A-B	50	35	50	1.30	150	-55 to +150
RS3B-B	100	70	100			
RS3D-B	200	140	200			
RS3G-B	400	280	400		250	
RS3J-B	600	420	600			
RS3K-B	800	560	800			
RS3M-B	1000	700	1000	500		

- \*1 Repetitive peak reverse voltage
- \*2 RMS voltage
- \*3 Continuous reverse voltage
- \*4 Maximum forward voltage@I<sub>F</sub>=3.0A
- \*5 Maximum Reverse recovery time, note 2

**Note:** 1.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas  
2. Reverse recovery time test condition, I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A



RS3A-B THRU RS3M-B

Rating and characteristic curves





# RS3A-B THRU RS3M-B

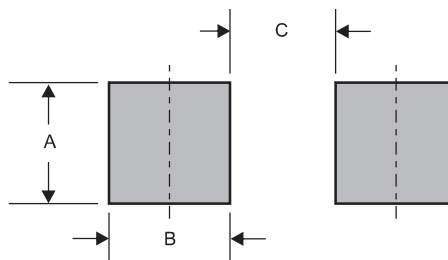
## Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

## Marking

Type number	Marking code	Example	
RS3A-B RS3B-B RS3D-B RS3G-B RS3J-B RS3K-B RS3M-B	RS3A RS3B RS3D RS3G RS3J RS3K RS3M	For Halogen Device 	For Halogen-free Device 

## Suggested solder pad layout



Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMB	0.078 (2.00)	0.059 (1.50)	0.110 (2.80)