

BP37.15MHz-2271


Applications

Digital Broadcasting

Specifications

BP37.15MHz-2271	
Zin/Zout	50 ohm (Unbaranced)
Insertion Loss	7.0dB max (at 37.15MHz)
Pass Band Ripple	0.3dBp-p max (34.15 up to 40.15MHz)
Attenuation	40dB min (0 up to 29.15MHz)
	40dB min (45.3 up to 70MHz)
Group Delay	8.0nsp-p max (34.15 up to 40.15MHz)

Dimensions

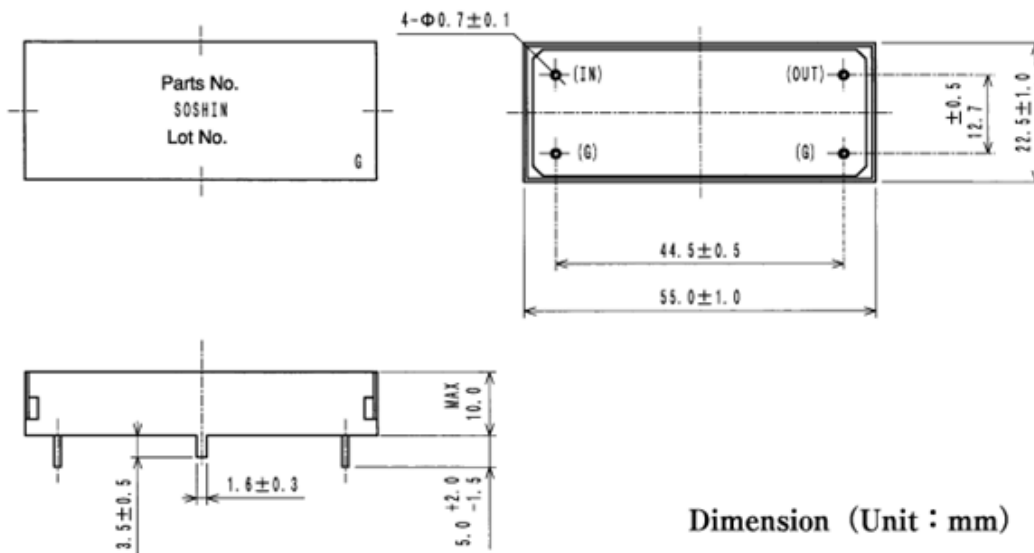

Chracteristics (Typical)

