


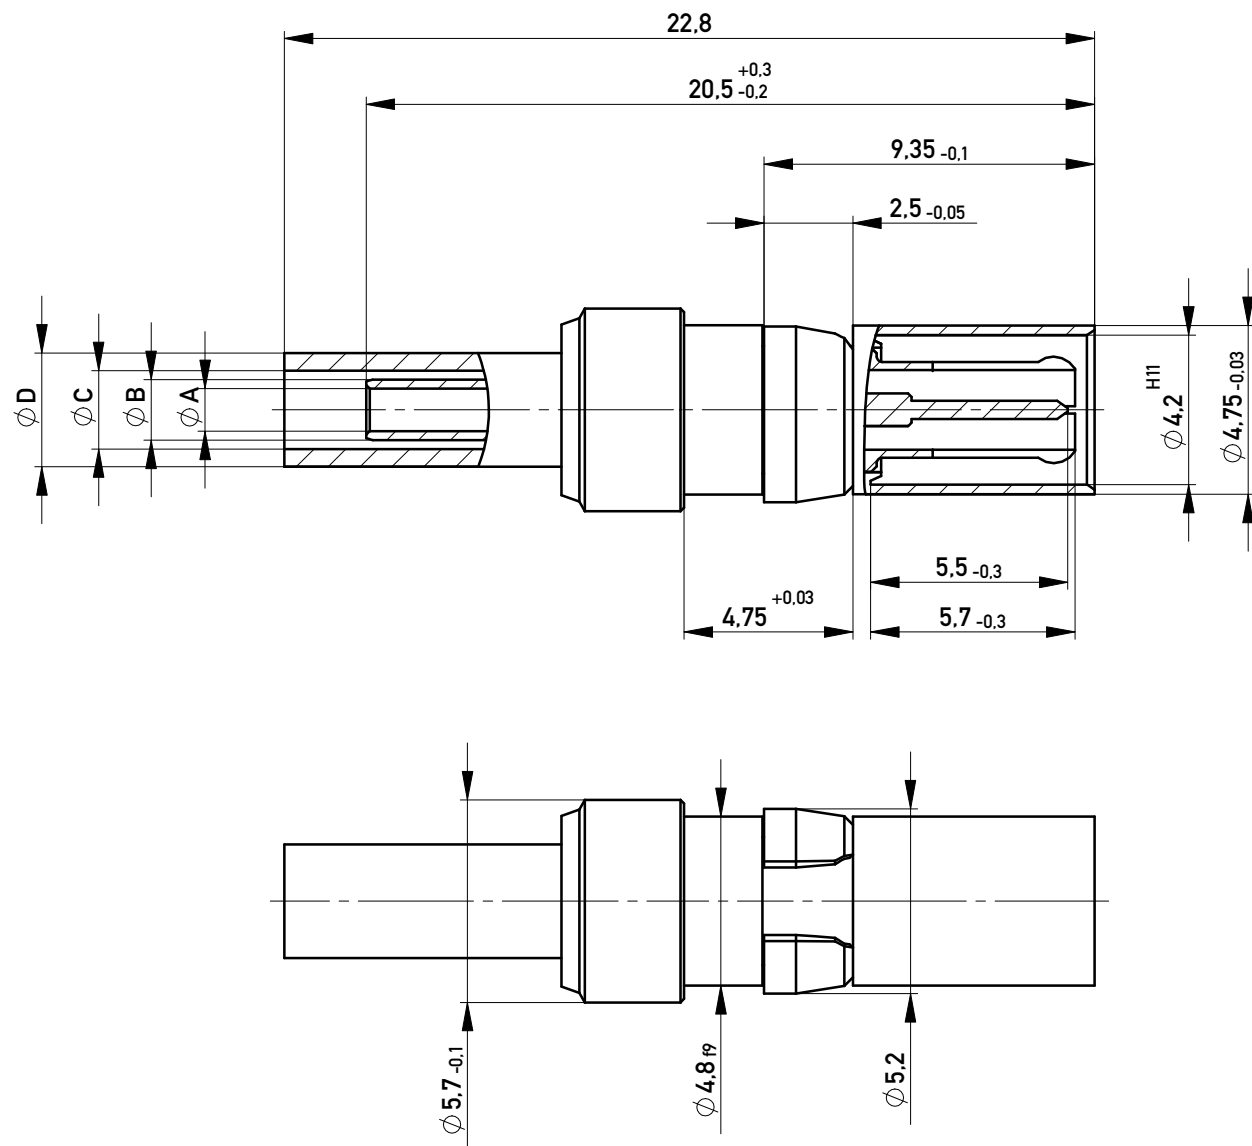

Missing informations
and dimensions
see at DIN 41626

Masse nur informativ,
keine Prüfpläne erstellen.

Technical Data:

Insertion/withdrawal force per contact:	≤ 10N
Mechanical operations:	≥ 500
Contact resistance inner conductor:	≤ 10 mOhm
outer conductor:	≤ 3 mOhm
Insulation resistance inner/outer conductor:	≥ 200 MOhm
Operation Temperature:	-55°C - +125°C
Frequency range:	0-2 GHz
Return loss:	> 20dB (2GHz)
Solder temperature:	according JEDEC 020C
Suitable assembly process:	leadfree wave / reflow soldering
RoHS compliance:	yes (6/6)
Designed for use with:	straight female DIN / right angle female HM connector
Packaging:	antistatic plastic bag
Packaging unit:	100 pieces per bag
Marking of packaging:	label or direct printed on bag required date see ERNI labeling spec. 254792

Contact does not contain DECA DBE materials

	1	1.5-2.5µm Cu, 2 - 3µmNiP+ 0.15µm Au						
102700360001	1		1.7	2.7	3.2	3.8	RG 188 A/U, RG 174 A/U, RG 316/U /02	
	1							
	1							
	1							
Part-No.	Class	Plating	Ø A	Ø B	Ø C	Ø D	Cable Group	Remarks

Information:			Tolerances		Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
					Coaxial Male Contact 50 Ohm <i>Crimp Termination</i>	
Copyright by ERNI GmbH Proprietary notice pursuant to ISO 16016 to be observed.			www.ERNI.com		102700360001	
l			30.07.2013		K2	
Index			Date		A3	
					Class STVSK0	