

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0473790100](#)
Status: **Active**
Description: 1.27mm (.050") Pitch External Improved Metal-Shielded Serial ATA Plug, Unmating Height 7.70mm (.303"), Gold (Au) Flash, Top Surface Mount with Shell, Right Angle, 7 Circuits, with Vacuum Pick-Up Tape, with in-line peg position, Lead Free

Documents:

[3D Model](#) [Product Specification PS-47082-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General


Product Family	I/O Connectors
Series	47379
Application	Wire-to-Board
Component Type	Plug
Product Name	External Serial ATA
Type	N/A

Physical

Boot Color	N/A
Circuits (Loaded)	7
Circuits (maximum)	7
Gender	Male
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.051 In
PCB Thickness Recommended (mm)	1.30 mm
Packaging Type	Embossed Tape on Reel
Panel Mount	Yes
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Pitch - Term. Interface (in)	0.050 In
Pitch - Term. Interface (mm)	1.27 mm
Plating min: Mating (µin)	2
Plating min: Mating (µm)	0.05
Plating min: Termination (µin)	50
Plating min: Termination (µm)	1.27
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-35°C to +85°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	1.5A
Grounding to Panel	Yes
Shielded	Yes
Voltage - Maximum	15V DC

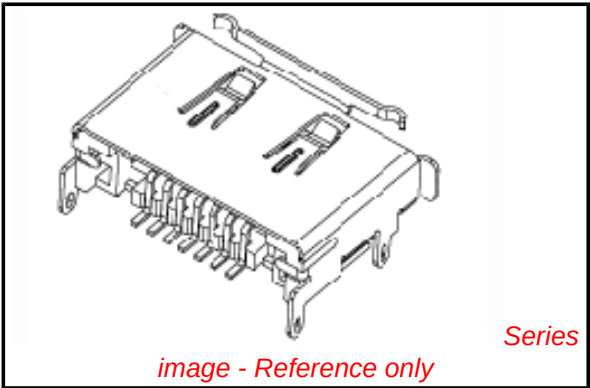

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[47379Series](#)

Mates With
[68782](#) External Serial ATA Cable
Assemblies

Solder Process Data

Duration at Max. Process Temperature (seconds)	8
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Product Specification	PS-47082-001
Sales Drawing	SD-47379-100

This document was generated on 04/02/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

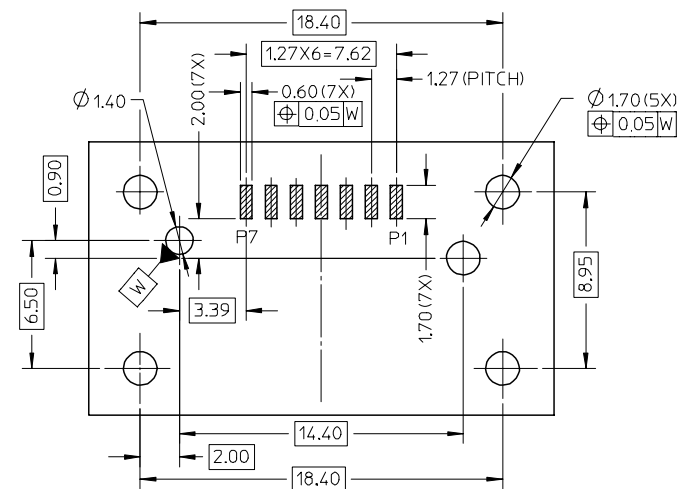





RECOMMEND PCB LAYOUT(CONNECTOR SIDE)
THICKNESS=1.30(ALL TOLERANCE: +/-0.05)

NOTES:


1. MATERIAL:
HOUSING: THERMAL PLASTIC.COLOR: BLACK, UL94V-0.
SHIELD CASE: COPPER ALLOY.
TERMIANL: COPPER ALLOY.
2. PLATING:
SHIELD CASE: 100~200μ" SOLDERABLE NICKEL OVER ALL.
TERMINAL: CONTACT AREA GOLD PLATING(SEE CHART) AND
SOLDER TAIL 50~100μ" TIN ALLOY PLATING
OVER 50μ" MIN. NICKEL.
3. PRODUCT SPEC REFER TO PS-47082-001.
- ▽4. PACKAGE SPEC REFER TO PK-47379-001.
5. PRODUCT MEET STANDARD 1.0 REVISION OF THE SERIAL ATA II:
CABLE AND CONNECTOR VOL 2 SPECIFICATION.
6. PRODUCT COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

47379-2000	TERMINAL CONTACT AREA PLATED 30µ" GOLD
47379-1000	TERMINAL CONTACT AREA PLATED 15µ" GOLD
47379-0000	TERMINAL CONTACT AREA PLATED GOLD FLASH
PART NO.	DESCRIPTION


REVISED	EC NO:	DRAWING	2007/10/130	DESCRIPTION	QUALITY SYMBOLS <div>▼=0</div> <div>▽=0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	<div>THIRD ANGLE PROJECTION</div>
	CHKD:	INCHEN	2007/05/04				<div>mm</div>	<div>INCH</div>	<div>DRAWN BY</div>	<div>DATE</div>	TITLE EXTERNAL SATA PLUG SMT WITH SHELL TOP MOUNT TYPE		
	APPR:		2007/05/09				<div>3 PLACES</div>	<div>± ---</div>	<div>± ---</div>	<div>CHECKED BY</div>		<div>DATE</div>	
							<div>2 PLACES</div>	<div>± 0.2</div>	<div>± ---</div>	<div>JENNY ZENG</div>		<div>2005/12/23</div>	
							<div>1 PLACE</div>	<div>± 0.25</div>	<div>± ---</div>	<div>APPROVED BY</div>		<div>DATE</div>	
							<div>ANGULAR ± 3 °</div>	<div>GRATE MA</div>	<div>2005/12/23</div>	<div>MATERIAL NO.</div>	<div>DOCUMENT NO.</div>	<div>SHEET NO.</div>	
D	REV				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	<div>SIZE</div>	<div>SEE CHART</div>	<div>SD-47379-100</div>		<div>1 OF 3</div>			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													

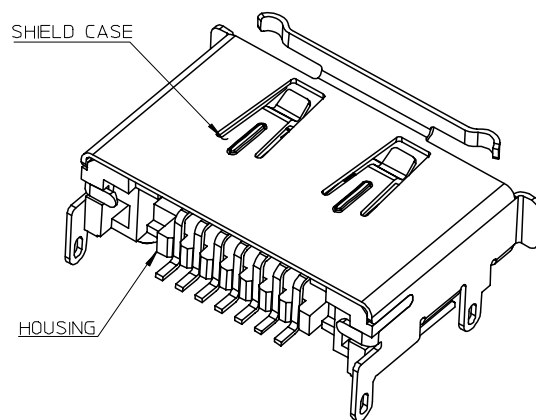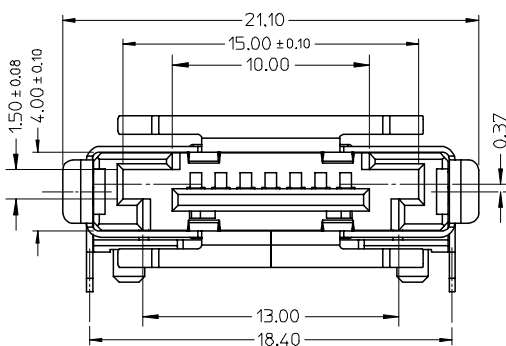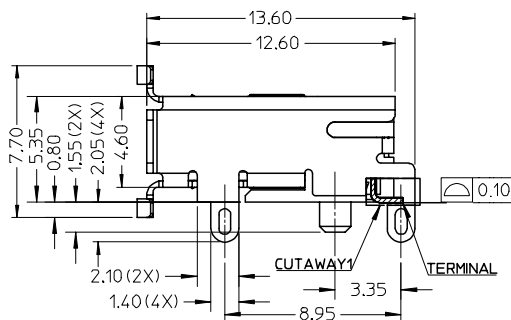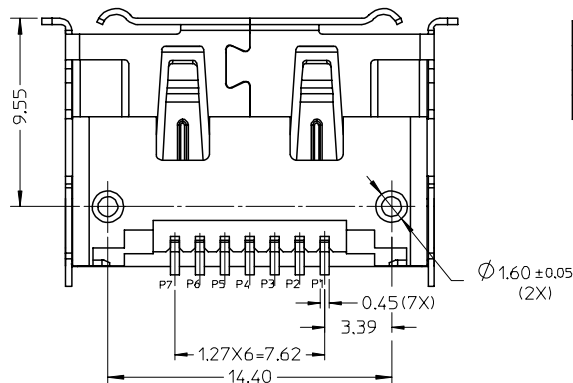

47379-2100	TERMINAL CONTACT AREA PLATED 30μ" GOLD
47379-1100	TERMINAL CONTACT AREA PLATED 15μ" GOLD
47379-0100	TERMINAL CONTACT AREA PLATED GOLD FLASH
PART NO.	DESCRIPTION

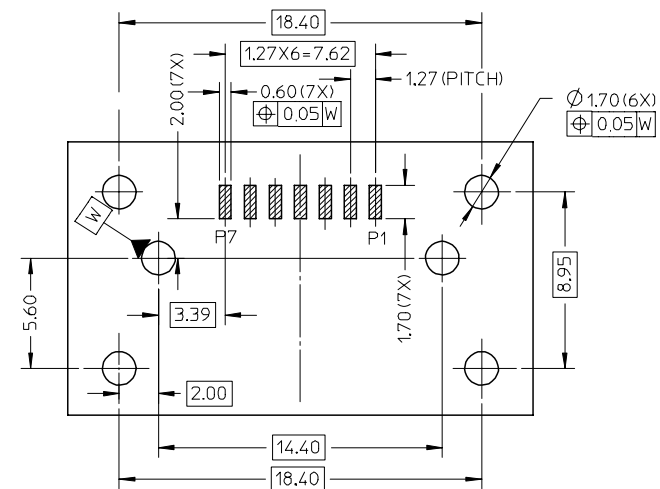
[illegible]

RECOMMEND PCB LAYOUT(CONNECTOR SIDE)
THICKNESS=1.30(ALL TOLERANCE: +/-0.05)

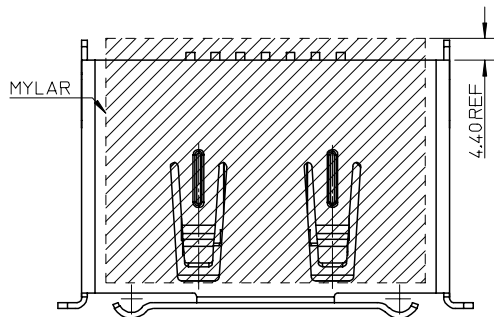

ALL DIMENSION REFER TO SHEET 1.

47379-2010	TERMINAL CONTACT AREA PLATED 30μ" GOLD
47379-1010	TERMINAL CONTACT AREA PLATED 15μ" GOLD
47379-0010	TERMINAL CONTACT AREA PLATED GOLD FLASH
PART NO.	DESCRIPTION

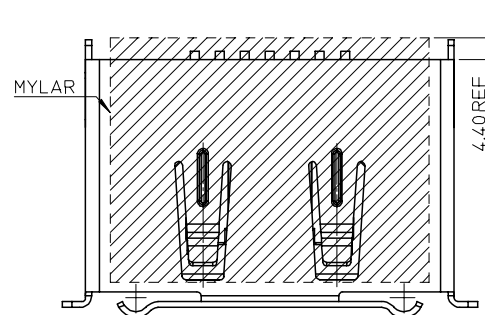

ALL DIMENSION REFER TO SHEET 2.

47379-2110	TERMINAL CONTACT AREA PLATED 30μ" GOLD
47379-1110	TERMINAL CONTACT AREA PLATED 15μ" GOLD
47379-0110	TERMINAL CONTACT AREA PLATED GOLD FLASH
PART NO.	DESCRIPTION

REVISED EC NO: SH2007-0788 2007/04/30 DRWN:GLLI CHKD:JTIAN 2007/05/04 APPR: JNCHEN 2007/05/09	QUALITY SYMBOLS ▽=0 ▽C=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY DIXON LI	DATE 2005/12/23	TITLE EXTERNAL SATA PLUG SMT WITH SHELL TOP MOUNT TYPE			
			4 PLACES	± ---	± ---	CHECKED BY	DATE				
			3 PLACES	± ---	± ---	JENNY ZENG	2005/12/23				
			2 PLACES	± 0.2	± ---	APPROVED BY	DATE				
			1 PLACE	± 0.25	± ---	GRATE MA	2005/12/23	 MOLEX INCORPORATED			
			ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-47379-100		3 OF 3		
		REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					