
Series EM2115 Series

Pluggable Terminal Block with Flanges;
(Mates with EM2215 Series);5.00 Centers

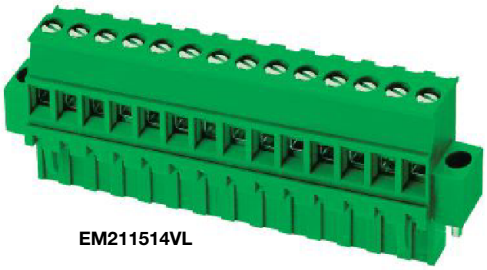

EM211514VL


SPECIFICATIONS:

Rating: 16A, 300V
Center Spacing: 0.197" (5.00mm)
Wire Range: #12-24 AWG
Housing Material: UL rated 94V0 Thermoplastic
Contact Material: Tin-Plated Phosphor Bronze
Screw Size: M2.6 Nickel-Plated Steel
Operating Temperature: 105°C (221°F) max., -55°C (-67°F) min.
Torque Rating: 7.0 lb-in.
Construction: Mold-to-Length
Agency Information: c UL us File E62622; CE Certified


Poles	L (mm)	L (Inch)	Poles	L (mm)	L (Inch)
2	20.0	0.787	13	75.0	2.952
3	25.0	0.984	14	80.0	3.149
4	30.0	1.181	15	85.0	3.346
5	35.0	1.378	16	90.0	3.543
6	40.0	1.575	17	95.0	3.740
7	45.0	1.772	18	100.0	3.937
8	50.0	1.969	19	105.0	4.133
9	55.0	2.165	20	110.0	4.330
10	60.0	2.362	21	115.0	4.527
11	65.0	2.559	22	120.0	4.724
12	70.0	2.756			

Dimensions - in (mm)

HORIZONTAL

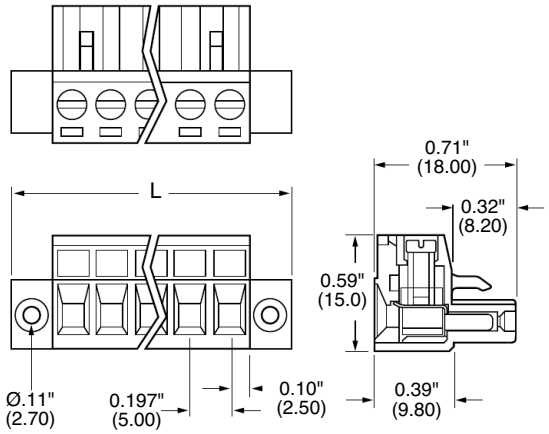

VERTICAL

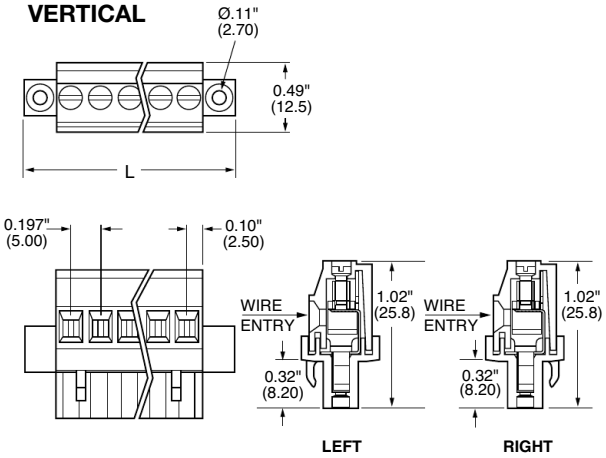

Part Numbering System

Inches (Millimeters)

Series

E M 2 1 1 5

# of Poles

☐☐

02 to **22**

Orientation

☐

V - Vertical
H - Horizontal

Wire Entry

☐

L - Left wire entry
R - Right wire entry
(specify for V orientation)

Mating Header: EM2215 pg. 95