

Aluminum Capacitors

Radial, Ultra High CV per Volume, Semi-Professional


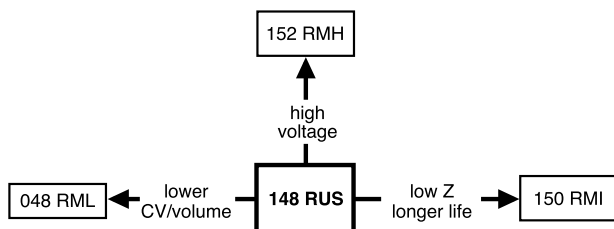


Fig.1 Component outline


RoHS
COMPLIANT

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case with pressure relief, insulated with a blue vinyl sleeve
- Charge and discharge proof
- Miniaturized, ultra high CV-product per unit volume
- Very long useful life: 3000 hours at 105 °C, high reliability
- Lead (Pb)-free versions are RoHS compliant

APPLICATIONS

- EDP, telecommunication, industrial, automotive and audio-video
- Smoothing, filtering, buffering in SMPS, timing
- Portable and mobile equipment (small size, low mass)

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance value (in μF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$)
- Rated voltage (in V)
- Date code, in accordance with IEC 60062
- Code indicating factory of origin
- Name of manufacturer
- Upper category temperature (105 °C)
- Negative terminal identification
- Series number (148)

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Nominal case sizes ($\varnothing D \times L$ in mm)	10 x 12 to 18 x 35
Rated capacitance range, C_R	47 to 22 000 μF
Tolerance on C_R	$\pm 20\%$
Rated voltage range, U_R	6.3 to 100 V
Category temperature range	- 40 to + 105 °C
Endurance test at 105 °C: case $\varnothing D = 10$ mm case $\varnothing D \geq 12.5$ mm	1000 hours 2000 hours
Useful life at 105 °C: case $\varnothing D = 10$ mm case $\varnothing D \geq 12.5$ mm	2000 hours 3000 hours
Useful life at 40 °C, $1.6 \times I_R$ applied: case $\varnothing D = 10$ mm case $\varnothing D \geq 12.5$ mm	140 000 hours 200 000 hours
Shelf life at 0 V, 105 °C	1000 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/105/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)

C_R (μF)	U_R (V)							
	6.3	10	16	25	35	50	63	100
47	-	-	-	-	-	-	-	10 x 12
68	-	-	-	-	-	-	-	10 x 16
100	-	-	-	-	-	-	10 x 12	10 x 20
150	-	-	-	-	-	-	-	12.5 x 20
220	-	-	-	-	-	10 x 12	10 x 16	12.5 x 25
	-	-	-	-	-	-	-	16 x 20
330	-	-	-	-	10 x 12	10 x 16	12.5 x 20	16 x 25
470	-	-	-	10 x 12	10 x 16	10 x 20	12.5 x 20	16 x 31
680	-	-	10 x 12	10 x 16	10 x 20	12.5 x 20	12.5 x 25	-
	-	-	-	-	-	-	16 x 20	-

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)								
C_R (μF)	U_R (V)							
	6.3	10	16	25	35	50	63	100
1000	-	10 x 12	10 x 16	10 x 20	12.5 x 20	12.5 x 25	16 x 25	-
1500	-	-	-	-	-	16 x 20	-	-
	-	10 x 16	10 x 20	12.5 x 20	12.5 x 25	16 x 25	16 x 31	-
2200	-	-	-	-	16 x 20	-	-	-
	10 x 16	10 x 20	12.5 x 20	12.5 x 25	16 x 25	16 x 31	18 x 35	-
3300	-	-	-	16 x 20	-	-	-	-
	-	12.5 x 20	12.5 x 25	16 x 25	16 x 31	18 x 35	-	-
4700	-	-	16 x 20	-	-	-	-	-
	12.5 x 20	12.5 x 25	16 x 25	16 x 31	18 x 35	-	-	-
6800	-	16 x 20	-	-	-	-	-	-
	16 x 20	16 x 25	16 x 31	18 x 35	-	-	-	-
10 000	16 x 25	16 x 31	18 x 35	-	-	-	-	-
15 000	16 x 31	18 x 35	-	-	-	-	-	-
22 000	18 x 35	-	-	-	-	-	-	-

DIMENSIONS in millimeters, AND AVAILABLE FORMS

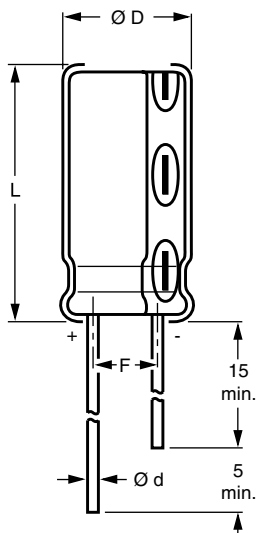


Fig. 2 Form CA: Long leads

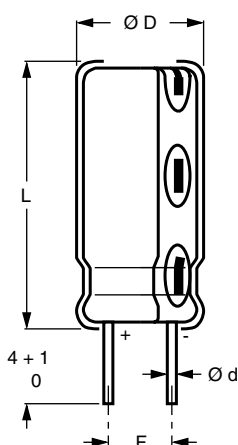


Fig.3 Form CB: Cut leads

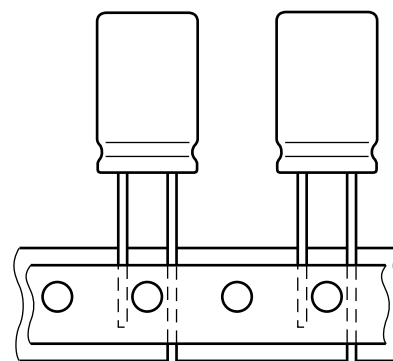


Fig.4 Form TFA: Taped in box (ammopack)

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES									
NOMINAL CASE SIZE $\varnothing D \times L$	CASE CODE	$\varnothing d$	$\varnothing D_{max.}$	$L_{max.}$	F	MASS (g)	PACKAGING QUANTITIES		
							Form CA	Form CB	Form TFA
10 x 12	14	0.6	10.5	13.5	5.0 ± 0.5	≈ 1.6	1000	500	800
10 x 16	15	0.6	10.5	17.5	5.0 ± 0.5	≈ 1.9	500	500	800
10 x 20	16	0.6	10.5	22.0	5.0 ± 0.5	≈ 2.2	500	500	800
12.5 x 20	17	0.6	13.0	22.0	5.0 ± 0.5	≈ 4.0	500	500	500
12.5 x 25	18	0.6	13.0	27.0	5.0 ± 0.5	≈ 5.0	250	250	500
16 x 20	19a	0.8	16.5	22.0	7.5 ± 0.5	≈ 6.0	250	250	250
16 x 25	19	0.8	16.5	27.0	7.5 ± 0.5	≈ 8.0	250	250	250
16 x 31	20	0.8	16.5	33.5	7.5 ± 0.5	≈ 9.0	100	100	250
18 x 35	22	0.8	18.5	37.5	7.5 ± 0.5	≈ 14.5	100	100	-

Note

1. Tape dimensions see section 'PACKAGING'

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	rated RMS ripple current at 100 Hz, 105 °C
I_{L2}	max. leakage current after 2 minutes at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 100 kHz

Note

Unless otherwise specified, all electrical values in Table 2 apply at
 $T_{amb} = 20\text{ °C}$, $P = 86$ to 106 kPa , $RH = 45$ to 75% .

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION										
U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 105 °C (mA)	I_{L2} 2 min (μA)	$\tan \delta$ 100 Hz	Z 100 kHz 20 °C (Ω)	Z 100 kHz - 40 °C (Ω)	ORDERING CODE MAL2148.....		
								BULK PACKAGING		TAPED
								FORM CA	FORM CB	FORM TFA
6.3	2200	10 x 16	720	139	0.30	0.170	1.90	53222E3	63222E3	33222E3
	4700	12.5 x 20	1100	296	0.34	0.085	0.60	53472E3	63472E3	33472E3
	6800	16 x 20	1210	428	0.38	0.060	0.30	53682E3	63682E3	33682E3
	10000	16 x 25	1660	630	0.46	0.045	0.25	53103E3	63103E3	33103E3
	15000	16 x 31	2050	945	0.56	0.033	0.15	53153E3	63153E3	33153E3
	22000	18 x 35	2350	1386	0.66	0.032	0.15	53223E3	63223E3	-
10	1000	10 x 12	460	100	0.24	0.240	3.00	54102E3	64102E3	34102E3
	1500	10 x 16	620	150	0.24	0.170	1.90	54152E3	64152E3	34152E3
	2200	10 x 20	750	220	0.26	0.130	1.50	54222E3	64222E3	34222E3
	3300	12.5 x 20	1010	330	0.28	0.085	0.60	54332E3	64332E3	34332E3
	4700	12.5 x 25	1260	470	0.30	0.065	0.50	54472E3	64472E3	34472E3
	4700	16 x 20	1260	470	0.30	0.060	0.30	94475E3	94476E3	94473E3
	6800	16 x 25	1590	680	0.34	0.045	0.25	54682E3	64682E3	34682E3
	10000	16 x 31	1910	1000	0.42	0.033	0.15	54103E3	64103E3	34103E3
	15000	18 x 35	2200	1500	0.52	0.032	0.15	54153E3	64153E3	-
16	680	10 x 12	450	109	0.20	0.240	3.00	55681E3	65681E3	35681E3
	1000	10 x 16	570	160	0.20	0.180	2.00	55102E3	65102E3	35102E3
	1500	10 x 20	720	240	0.20	0.130	1.50	55152E3	65152E3	35152E3
	2200	12.5 x 20	930	352	0.22	0.090	0.60	55222E3	65222E3	35222E3
	3300	12.5 x 25	1180	528	0.24	0.065	0.50	55332E3	65332E3	35332E3
	3300	16 x 20	1120	528	0.24	0.060	0.30	95335E3	95336E3	95333E3
	4700	16 x 25	1480	752	0.26	0.045	0.25	55472E3	65472E3	35472E3
	6800	16 x 31	1790	1088	0.30	0.035	0.20	55682E3	65682E3	35682E3
	10000	18 x 35	2100	1600	0.36	0.032	0.20	55103E3	65103E3	-
25	470	10 x 12	410	118	0.16	0.260	3.20	56471E3	66471E3	36471E3
	680	10 x 16	550	170	0.16	0.190	2.10	56681E3	66681E3	36681E3
	1000	10 x 20	690	250	0.16	0.130	1.50	56102E3	66102E3	36102E3
	1500	12.5 x 20	850	375	0.16	0.100	0.70	56152E3	66152E3	36152E3
	2200	12.5 x 25	1110	550	0.18	0.070	0.50	56222E3	66222E3	36222E3
	2200	16 x 20	1050	550	0.18	0.060	0.30	96225E3	96226E3	96223E3
	3300	16 x 25	1420	825	0.20	0.045	0.25	56332E3	66332E3	36332E3
	4700	16 x 31	1750	1175	0.22	0.035	0.20	56472E3	66472E3	36472E3
	6800	18 x 35	2050	1700	0.26	0.033	0.20	56682E3	66682E3	-

ORDERING EXAMPLE

Electrolytic capacitor 148 series

470 $\mu\text{F}/25\text{ V}$; $\pm 20\%$

Nominal case size: $\varnothing 10 \times 12\text{ mm}$; Form TFA

Ordering Code: MAL214836471E3

Former 12NC: 2222 148 36471

**ELECTRICAL DATA AND ORDERING INFORMATION**

U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE Ø D x L (mm)	I _R 100 Hz 105 °C (mA)	I _{L2} 2 min (μA)	tan δ 100 Hz	Z 100 kHz 20 °C (Ω)	Z 100 kHz - 40 °C (Ω)	ORDERING CODE MAL2148.....		
								BULK PACKAGING		TAPED
								FORM CA	FORM CB	FORM TFA
35	330	10 x 12	350	116	0.14	0.270	3.30	50331E3	60331E3	30331E3
	470	10 x 16	480	165	0.14	0.190	2.10	50471E3	60471E3	30471E3
	680	10 x 20	580	238	0.14	0.140	1.60	50681E3	60681E3	30681E3
	1000	12.5 x 20	810	350	0.14	0.100	0.70	50102E3	60102E3	30102E3
	1500	12.5 x 25	950	525	0.14	0.070	0.50	50152E3	60152E3	30152E3
	1500	16 x 20	970	525	0.14	0.063	0.30	90155E3	90156E3	90153E3
	2200	16 x 25	1270	770	0.16	0.045	0.25	50222E3	60222E3	30222E3
	3300	16 x 31	1620	1155	0.18	0.037	0.20	50332E3	60332E3	30332E3
	4700	18 x 35	1930	1645	0.20	0.033	0.20	50472E3	60472E3	-
50	220	10 x 12	330	110	0.12	0.280	3.40	51221E3	61221E3	31221E3
	330	10 x 16	420	165	0.12	0.200	2.20	51331E3	61331E3	31331E3
	470	10 x 20	530	235	0.12	0.140	1.60	51471E3	61471E3	31471E3
	680	12.5 x 20	720	340	0.12	0.100	0.70	51681E3	61681E3	31681E3
	1000	12.5 x 25	950	500	0.12	0.070	0.50	51102E3	61102E3	31102E3
	1000	16 x 20	880	500	0.12	0.068	0.35	91105E3	91106E3	91103E3
	1500	16 x 25	1180	750	0.12	0.047	0.30	51152E3	61152E3	31152E3
	2200	16 x 31	1520	1100	0.14	0.039	0.20	51222E3	61222E3	31222E3
	3300	18 x 35	1810	1650	0.16	0.035	0.20	51332E3	61332E3	-
63	100	10 x 12	230	63	0.10	0.320	3.90	58101E3	68101E3	38101E3
	220	10 x 16	350	139	0.10	0.240	2.70	58221E3	68221E3	38221E3
	330	12.5 x 20	540	208	0.10	0.130	0.90	58331E3	68331E3	38331E3
	470	12.5 x 20	540	296	0.10	0.130	0.90	58471E3	68471E3	38471E3
	680	12.5 x 25	760	428	0.10	0.085	0.65	58681E3	68681E3	38681E3
	680	16 x 20	820	428	0.10	0.070	0.50	98685E3	98686E3	98683E3
	1000	16 x 25	980	630	0.10	0.049	0.25	58102E3	68102E3	38102E3
	1500	16 x 31	1390	945	0.10	0.042	0.20	58152E3	68152E3	38152E3
	2200	18 x 35	1670	1386	0.12	0.038	0.20	58222E3	68222E3	-
100	47	10 x 12	165	47	0.08	0.640	19.20	59479E3	69479E3	39479E3
	68	10 x 16	190	68	0.08	0.580	17.40	59689E3	69689E3	39689E3
	100	10 x 20	260	100	0.08	0.380	11.40	59101E3	69101E3	39101E3
	150	12.5 x 20	360	150	0.08	0.260	7.80	59151E3	69151E3	39151E3
	220	12.5 x 25	440	220	0.08	0.170	5.10	59221E3	69221E3	39221E3
	220	16 x 20	590	220	0.08	0.140	4.20	99225E3	99226E3	99223E3
	330	16 x 25	630	330	0.08	0.120	3.60	59331E3	69331E3	39331E3
	470	16 x 31	750	470	0.08	0.100	3.00	59471E3	69471E3	39471E3

ADDITIONAL ELECTRICAL DATA

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_s \leq 1.15 U_R$
Reverse voltage		$U_{rev} \leq 1 V$
Current		
Leakage current	After 2 minutes at U_R	$I_{L2} \leq 0.01 C_R \times U_R$
	After 5 minutes at U_R	$I_{L5} \leq 0.002 C_R \times U_R$
Inductance		
Equivalent series inductance (ESL)	Case Ø D = 10 mm	typ. 16 nH
	Case Ø D ≥ 12.5 mm	typ. 18 nH
Resistance		
Equivalent series resistance (ESR)	calculated from $\tan \delta_{max.}$ and C_R (see Table 2)	$ESR = \tan \delta / 2 \pi f C_R$

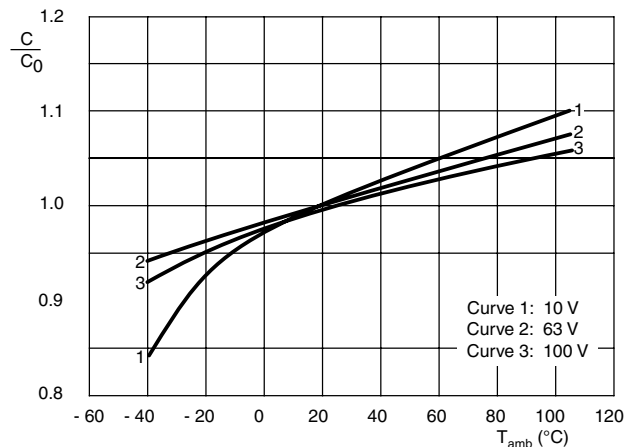
CAPACITANCE (C)

Fig. 5 Typical multiplier of capacitance as a function of ambient temperature

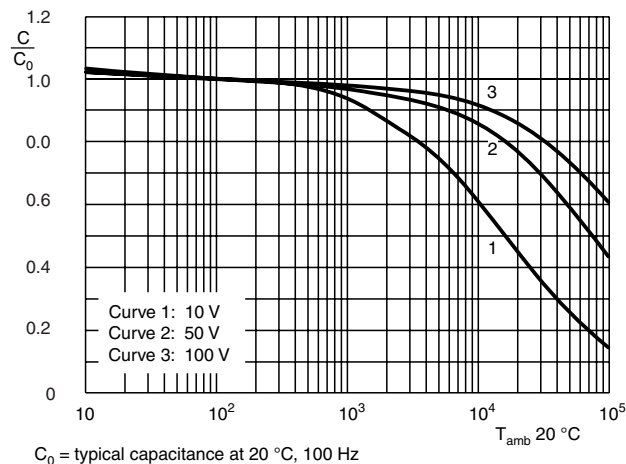


Fig. 6 Typical multiplier of capacitance as a function of frequency

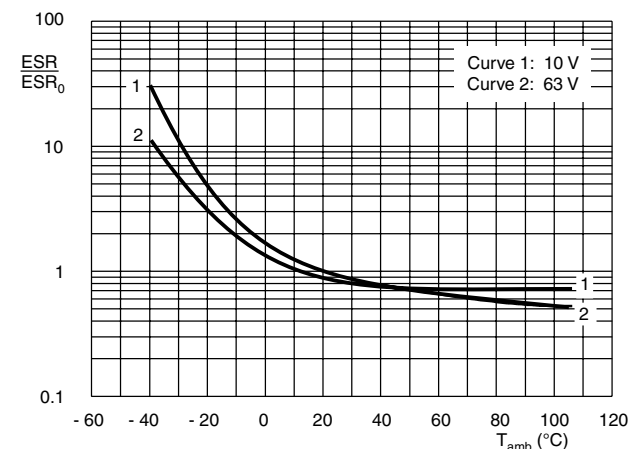
EQUIVALENT SERIES RESISTANCE (ESR)

Fig. 7 Multiplier of ESR as a function of ambient temperature

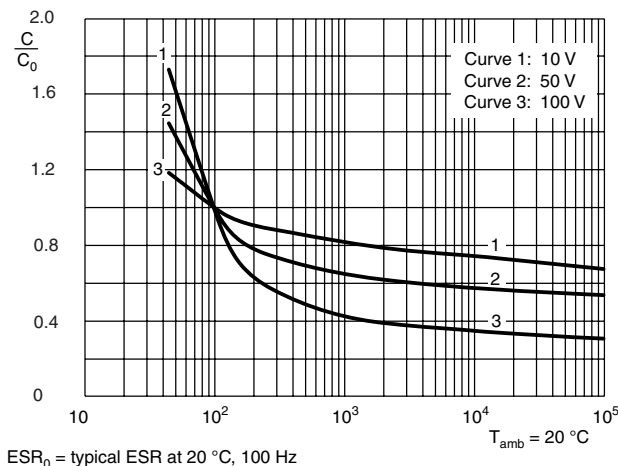


Fig. 8 Multiplier of ESR as a function of frequency

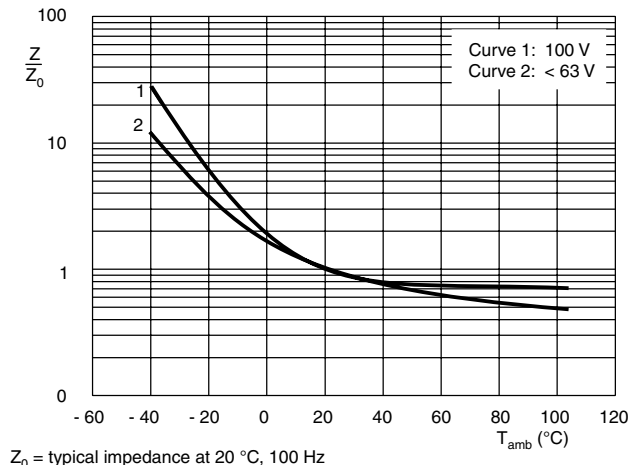
IMPEDANCE (Z)

Fig. 9 Multiplier of impedance as a function of ambient temperature

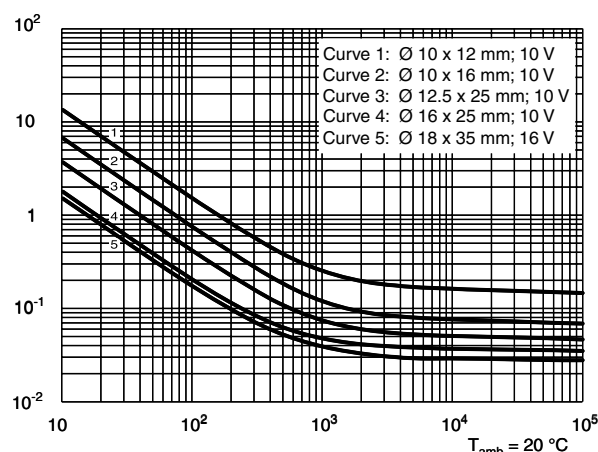


Fig. 10 Typical impedance as a function of frequency

IMPEDANCE (Z)

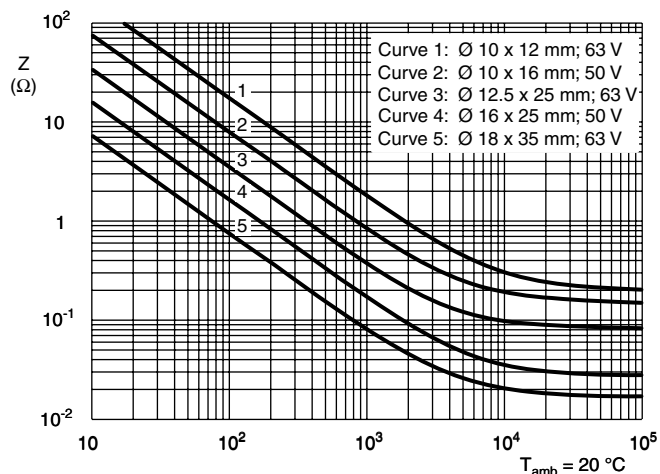
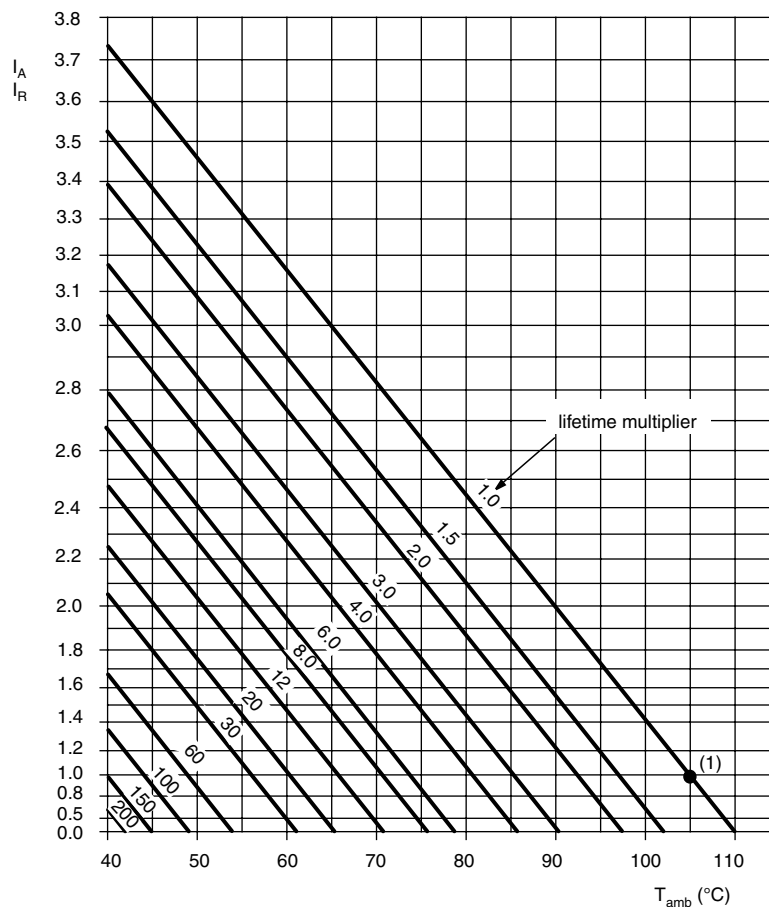


Fig.11 Typical impedance as a function of frequency

RIPPLE CURRENT AND USEFUL LIFE


 I_A = actual ripple current at 100 Hz

 I_R = rated ripple current at 100 Hz, 105 °C

⁽¹⁾Useful life at 105 °C and I_R applied:

case Ø D = 10 mm: 2000 h

case Ø D ≥ 12.5 mm: 3000 h

Fig.12 Multiplier of useful life as a function of ambient ripple current load

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY

FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3$ to 25 V	$U_R = 35$ V	$U_R = 50$ to 100 V
50	0.95	0.85	0.80
100	1.00	1.00	1.00
300	1.07	1.20	1.25
1000	1.12	1.30	1.40
3000	1.15	1.35	1.50
$\geq 10\,000$	1.20	1.40	1.60

TEST PROCEDURES AND REQUIREMENTS

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R applied case $\varnothing D = 10$ mm: 1000 hours case $\varnothing D \geq 12.5$ mm: 2000 hours	$U_R = 6.3$ V; $\Delta C/C: +15\text{ }/-30\text{ }%$ $U_R \geq 10$ V; $\Delta C/C: \pm 20\text{ }%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R and I_R applied case $\varnothing D = 10$ mm: 2000 hours case $\varnothing D \geq 12.5$ mm: 3000 hours	$U_R = 6.3$ V; $\Delta C/C: +45\text{ }/-50\text{ }%$ $U_R \geq 10$ V; $\Delta C/C: \pm 45\text{ }%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\text{ }%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 105\text{ }^{\circ}\text{C}$; no voltage applied; 1000 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$U_R = 6.3$ V; $\Delta C/C: +15\text{ }/-30\text{ }%$ $U_R \geq 10$ V; $\Delta C/C: \pm 20\text{ }%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$
Surge	IEC 60384-4/ EN130300 subclause 4.14	from source of $1.15 \times U_R$: $RC = 0.1 \pm 0.05$ s; 1000 cycles of 30 s on, 330 s off, at $105\text{ }^{\circ}\text{C}$	$\Delta C/C: \pm 20\text{ }%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Reverse voltage	IEC 60384-4/ EN130300 subclause 4.15	$T_{amb} = 105\text{ }^{\circ}\text{C}$: 125 h at $U = -1$ V, followed by 125 hours at U_R	$\Delta C/C: \pm 15\text{ }%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.