
Shielded Power Inductors – SLC7530

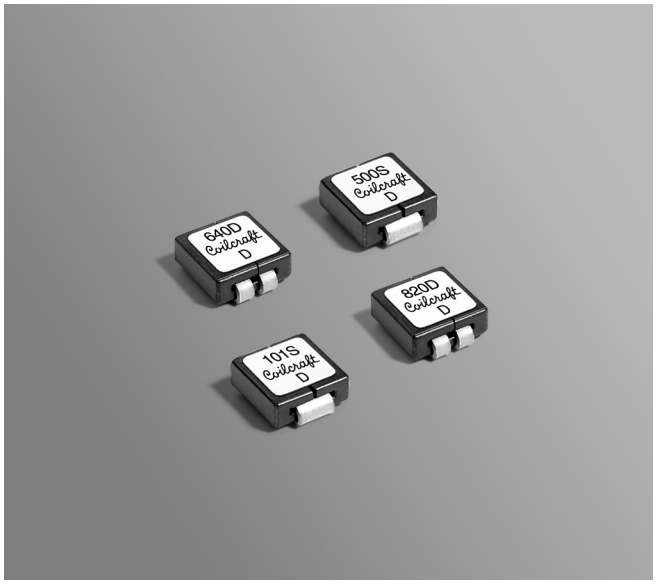

- Designed for high-speed switch mode applications
- Can be used as a 1:1 transformer or in SEPIC applications

Designer's Kit C379 contains 3 each of all values.
Core material Ferrite
Core and winding loss See www.coilcraft.com/coreloss
Terminations RoHS compliant matte tin over nickel over copper. Other terminations available at additional cost.
Weight: 0.44 – 0.47 g
Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current
Storage temperature Component: –40°C to +125°C. Tape and reel packaging: –40°C to +80°C
Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles
Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)
Failures in Time (FIT) / Mean Time Between Failures (MTBF) 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332
Packaging 500/7″ reel; 1700/13″ reel; Plastic tape: 16 mm wide, 0.33 mm thick, 12 mm pocket spacing, 3.12 mm pocket depth
PCB washing Tested with pure water or alcohol only. For other solvents, see Doc787_PCB_Washing.pdf.

Single Conductor

Part number[1]	L±20%[2] (µH)	DCR ±5%[3] (mOhms)	SRF typ[4] (GHz)	Isat[5] (A)	Irms[6] (A)
SLC7530S-500ML_	0.050	0.123	3.80	50	40
SLC7530S-640ML_	0.064	0.123	3.65	32	40
SLC7530S-820ML_	0.082	0.123	3.75	22	40
SLC7530S-101ML_	0.100	0.123	3.75	20	40

Dual Conductor

	Leads connected in parallel					Leads connected in series				
Part number[1]	L±20%[2] (µH)	DCR ±5%[3] (mOhms)	SRF typ[4] (GHz)	Isat[5] (A)	Irms[6] (A)	L±20%[2] (µH)	DCR max[3] (mOhms)	SRF typ[4] (GHz)	Isat[5] (A)	Irms[6] (A)
SLC7530D-500ML_	0.050	0.209	3.75	50	38	0.188	1.00	1.50	21	17
SLC7530D-640ML_	0.064	0.209	3.65	32	38	0.272	1.00	1.30	14	17
SLC7530D-820ML_	0.082	0.209	3.75	22	38	0.350	1.00	1.20	11	17
SLC7530D-101ML_	0.100	0.209	3.75	20	38	0.400	1.00	0.950	8	17


1. When ordering, please specify **termination** and **packaging** codes:

SLC7530S-101MLC

Termination: **L** = RoHS compliant matte tin over nickel over copper **Special order: T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).

Packaging: **C** = 7″ machine-ready reel. EIA-481 embossed plastic tape (500 parts per full reel).
B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added ($25 charge), use code letter C instead.
D = 13″ machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (1700 parts per full reel).

2. Inductance tested at 100 kHz, 0.1 Vrms using an Agilent/HP 4263B LCR meter or equivalent.
3. DCR is measured on a micro-ohmmeter at points indicated in the diagram.



▲Points used for measuring DCR

4. SRF measured using an Agilent/HP 8753ES network analyzer and a Coilcraft SMD-D fixture.
5. DC current at which the inductance drops 20% (typ) from its value without current.
6. Current that causes a 40°C rise from 25°C ambient.
7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

SPICE models
ON OUR WEB SITE

Coilcraft®
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg


Document 366-1 Revised 10/21/13

© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.


Shielded Power Inductors - SLC7530 Series

Typical L vs Current

Single Conductor

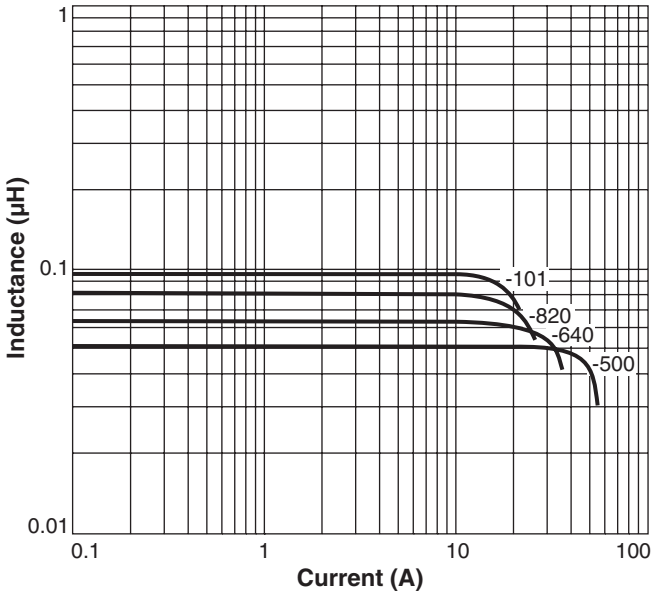


Dual Conductor

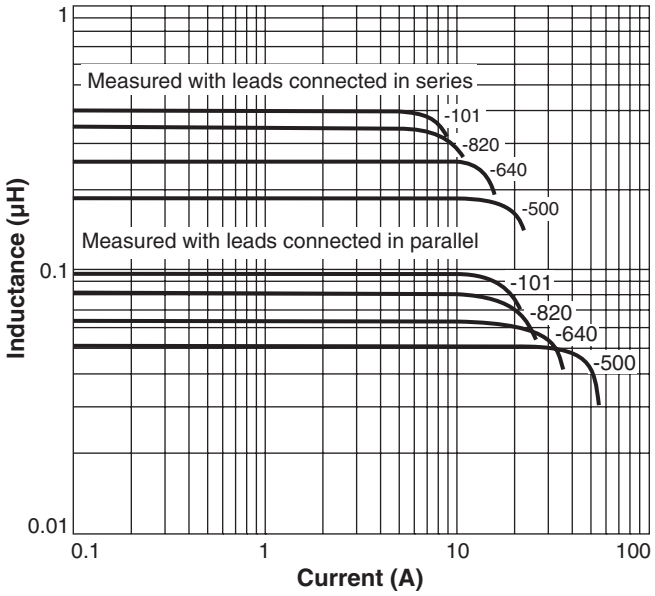


Typical L vs Frequency

Single Conductor

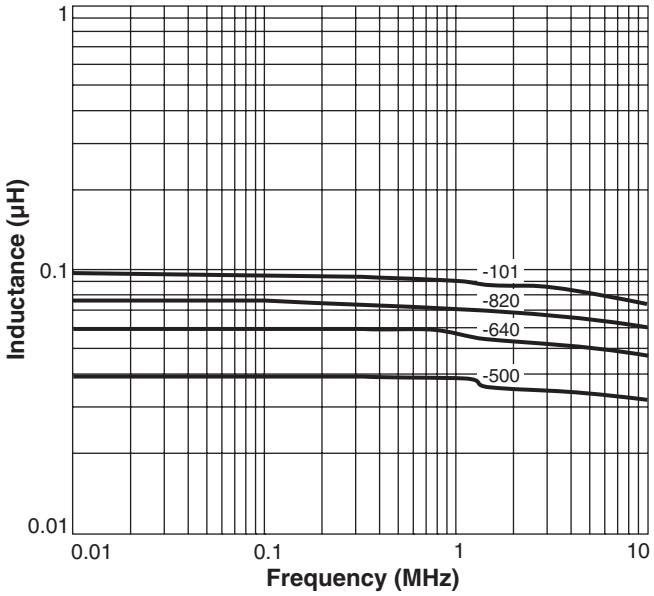

Dual Conductor

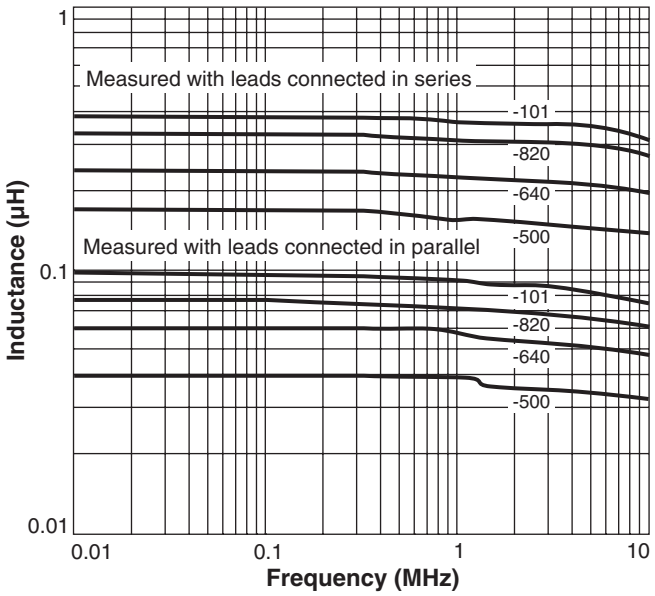

Coilcraft
www.coilcraft.com


US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg


Document 366-2 Revised 10/21/13

© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.


Shielded Power Inductors - SLC7530 Series

Typical Temperature Rise vs Current Current Derating

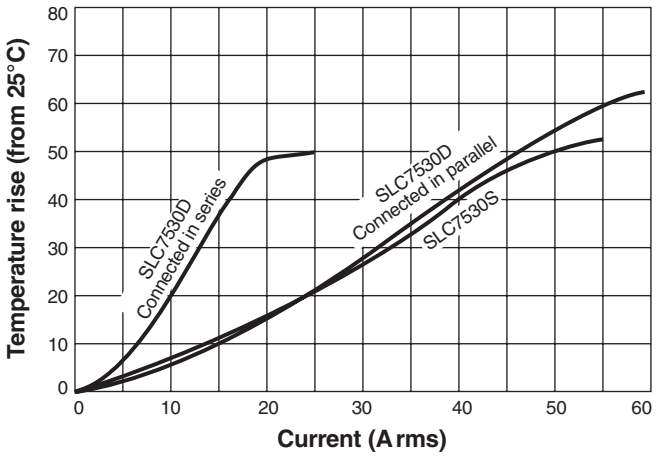

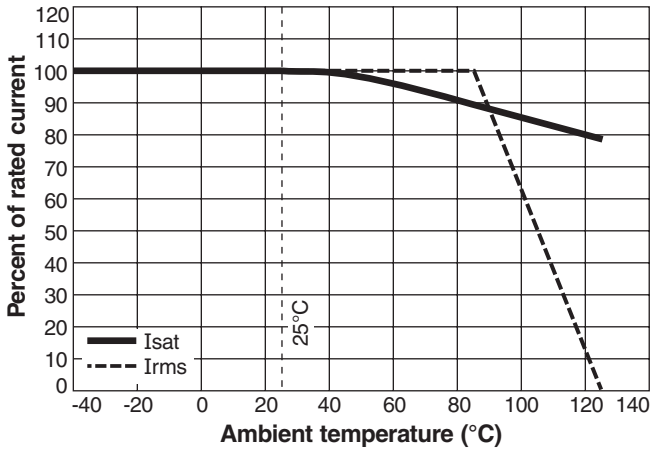


Dimensions – Single Conductor

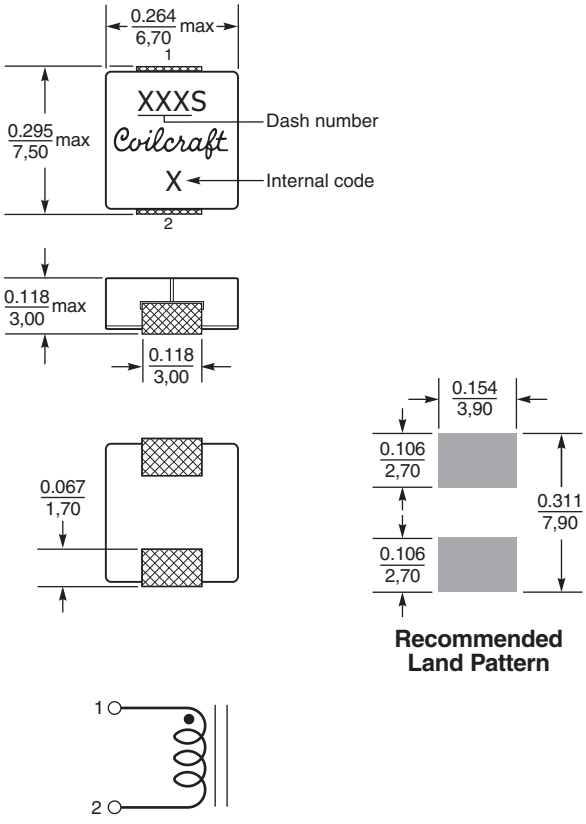

Dimensions are in inches / mm

Dimensions – Dual Conductor

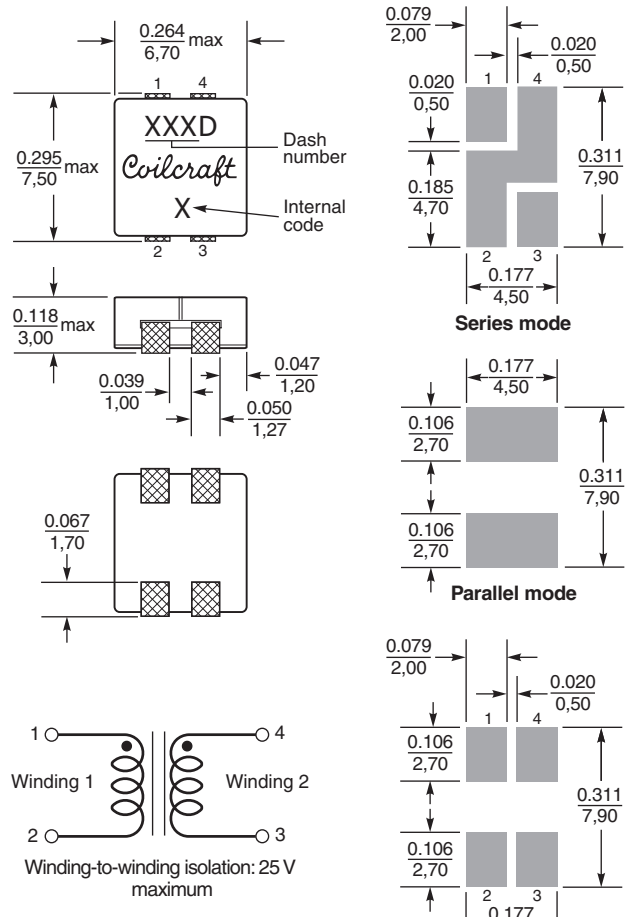

Dimensions are in inches / mm

Coilcraft
www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 366-3 Revised 10/21/13

© Coilcraft Inc. 2013
This product may not be used in medical or high risk applications without prior Coilcraft approval.
Specification subject to change without notice.
Please check web site for latest information.