


3/8" JUMPER

7-16 R/A MALE /
7-16 R/A MALE

SLJ38SF-60R60R-X-00

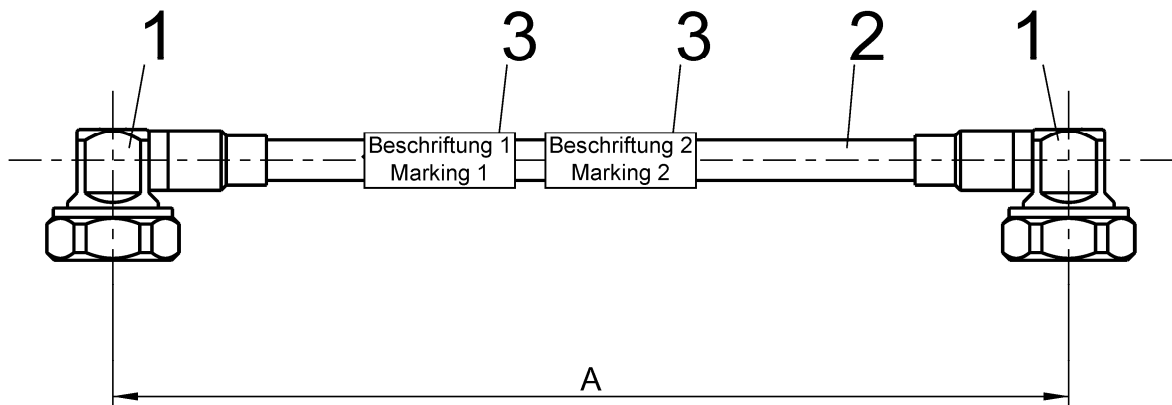

Function Description

This part is a coaxial cable assembly for telecommunication equipment. It consists of 3/8" super flexible coaxial cable with FRNC jacket and two 7/16 r/a male connectors. The assembly is waterproof in mated condition and UV protected and fire retardant.

Available Variants

The assembly is available in lengths from 0.5 m to 10 m in intervals of 0.5 m. Different feet length are available on request.

Assembly Parts

| | |
|-----------------|--|
| Connector | 7-16 r/a male connectors plated with white bronze |
| Cable | S-Link 3/8"S, FRNC jacket |
| Marking 1 | Direct print onto the cable or one wrapping label Marking includes manufacturer, part nr. & batch no. |
| Marking 2 | Direct print onto the cable or on wrapping label Marking includes "Rosenberger factory made" Position in the middle of the cable |
| Bend Protection | molding material PE compound with flame retardant |

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/05_10/6.0

3/8" JUMPER

7-16 R/A MALE /
7-16 R/A MALE

SLJ38SF-60R60R-X-00

Electrical Data

| | |
|--|--|
| Impedance | 50 Ω |
| Frequency | DC to 2.7 GHz |
| Return loss | |
| DC – 1 GHz | ≥ 32 dB |
| 1 – 2.2 GHz | ≥ 30 dB |
| 2.2 – 2.7 GHz | ≥ 28 dB |
| Insertion loss typ. | |
| DC – 1 GHz | ≤ 0.14 dB/m (cable) + 0.01 dB * √f (GHz) |
| 1 – 2.2 GHz | ≤ 0.21 dB/m (cable) + 0.01 dB * √f (GHz) |
| 2.2 – 2.7 GHz | ≤ 0.24 dB/m (cable) + 0.01 dB * √f (GHz) |
| Intermodulation (3rd order @ 2 x 20 W) | typ. max. |
| | ≤ -120 dBm ≤ -117 dBm |
| Relative Velocity of Propagation | 83 % |
| DC breakdown voltage | 2500 V |

Mechanical Data

| | |
|--|--------------|
| Coupling torque (recommended) | 25 to 30 Nm |
| Spanner flat on coupling nut | 32 mm |
| Cable diameter, jacket | 13.5 mm typ. |
| Tensile strength | 500 N |
| Recommended hanger spacing | 0.6 m |
| Minimum bend radius single | 13 mm* |
| Minimum bend radius repeated | 25 mm* |
| *Bending starts behind connector incl. the kink protection | |

Environmental Data

| | |
|--------------------------------|---------------------------------------|
| Operation temperature range | -40 °C to +80 °C |
| Installation temperature range | -25 °C to +60 °C |
| Degree of protection | IEC 60529, IP68 1 bar for 1 h (mated) |
| RoHS | compliant |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| | | | | | | | |
|--|------------|-----------|----------|------|---------------------------|--|---------------|
| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
| E. Truc-Vallet | 17.03.2016 | M. Wimmer | 18.03.16 | 100 | 16-v083 | Fl. Öllerer | 18.03.16 |
| Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de | | | | | | Tel. : +49 8684 18-0 Email : info@rosenberger.de | |
| | | | | | | | Page 2 / 2 |