
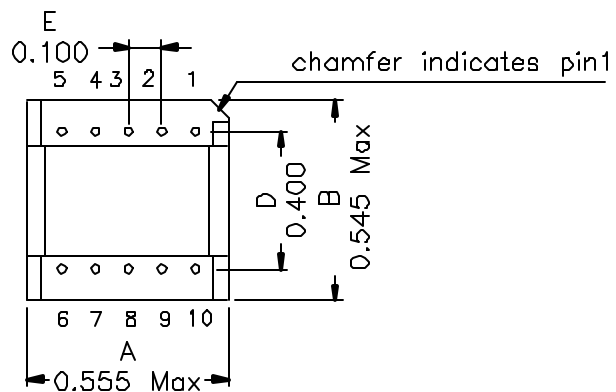
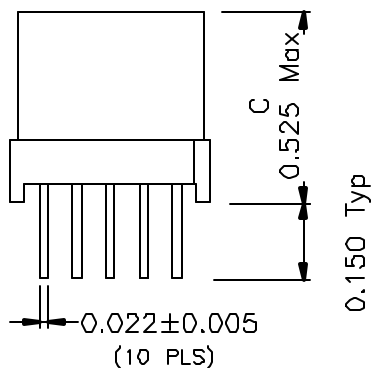


1. Mechanical Dimensions:




(BOTTOM VIEW)

Note: Designed to meet UL1950 for supplementary insulation, 250 working volts.

DOC. REV: A/1

2. Schematic:

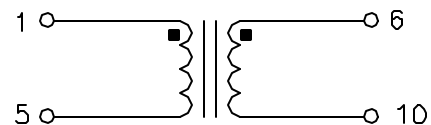

3. Electrical Specifications:

Turns Ratio: 1-5:6-10 1:1

Isolation Voltage: 850VAC

OCL: P1-5 4.0mH±10% 10KHz 0.1V 0/200mA_{dc}

DC Res.: 1-5 4.0 Ohms Max

6-10 4.0 Ohms Max

XFMRS Inc

Title: **ADSL Inductor**

UNLESS OTHERWISE SPECIFIED

P/N: XF0043-AD4

REV. A

TOLERANCES:

DWN.

康玉坤

Aug-12-00

.xxx ±0.010

CHK.

李清儿

Aug-12-00

Dimensions in INCH

APP.

BW

Aug-12-00

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

Scale 1.5:1 SHT 1 OF 1