

HSF

NOTES:



Current Rating: 1AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA9T+30%GF(UL94V-0)

Ordering Information

3131-16 S XX BK 00 X 1

No. of Pins 16
 Contact Plating G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 SN=Tin
 Color Insulator B=Black
 Packing T=Tube
 A=Tray

Item	Pitch	Mating	DIP(A)
Standard	1.27	2344	2.30
Alternate			

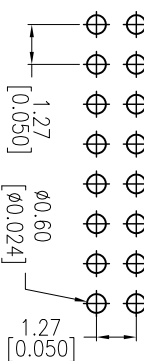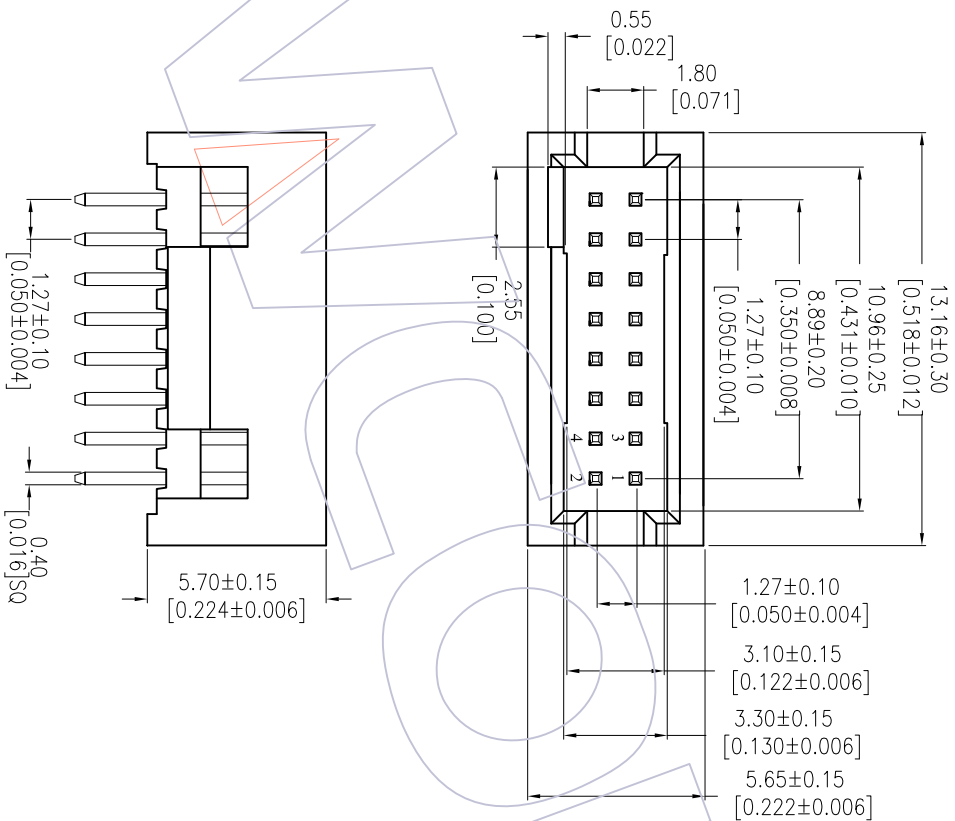

OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE: 1.27 BOX HEADER H=5.70 180° DIP 16P
XX	Tsingn	2013/09/24	1:1	3131-16SXXBK00X1	
CHECK	CHECK	DATE	UNIT	SIZE	Customer NO.
XXX	XXX		mm	A4	
APPROVE	APPROVE	DATE	SHEET	PROJ.	
XXX	XXX		1/1		
CHANGE	CHANGE				
MODIFICATION DESCRIPTION	MODIFICATION DESCRIPTION				
NEW	NEW				
DATE	DATE				
2013/09/24	2013/09/24				

WCON

WCON-Dongguan
 Http: www.wcon-china.com
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon-china.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: wconks@wcon-china.com